



— USA —

2016

FOOD SERVICE EQUIPMENT  
PRICE LIST



1

2

3

4

5

6

7

8

9

10

# Infrico





INFRICO HEADQUARTER IN SPAIN

- REACH-IN REFRIGERATORS & FREEZERS
- BLAST CHILLERS & SHOCK FREEZERS
- UNDERCOUNTERS
- FOOD PREP TABLES
- CHEF BASES
- COOLERS & WINE CELLARS
- DISPLAY CASES
- COUNTER TOP DISPLAY CASES
- AIR CURTAINS
- ACCESSORIES & PARTS



## Welcome to INFRICO USA !

INFRICO is a Family owned & operated Manufacturer based out of the south region of Spain, a major Global Market Player for almost 30 years in the production & sales of "SPEC GRADE" Commercial Refrigeration Equipment. With our NORTH AMERICA H.Q. located in Miami FL, our products are offered across the United States since 2011 with incredible success.

Our line is design driven, perfect for almost any type of environment, whether we deal with gourmet bakery cafés, luxury hotels & resorts, prime restaurants, entertainment parks, casinos, schools, airports, sport stadiums, grocery stores, or supermarkets. Part of this success comes from the strong relationships we keep building with our Consultants throughout the country, who are contributing enormously in specifying our products for multiple high level jobs.

Some key aspects of our line:

- ETL & NSF7 CERTIFIED
- LONGEST DURABILITY IN THE FIELD (HEAVY GAUGE STAINLESS STEEL INTERIOR & EXTERIOR CABINET CONSTRUCTION)
- INCREDIBLE ENERGY SAVINGS (LED LIGHTING, HOT GAS DEFROST SYSTEMS, HIGH EFFICIENCY FAN MOTORS)
- BEST GUARANTEED VALUE PRICE
- 6 YEARS TOTAL COMPRESSOR WARRANTY

We supply our own parts and have been able to establish a solid U.S. service network with access to several hundred authorized and skilled technicians across the country. Our products are stocked in Miami FL and manufactured in Spain, under the highest international quality and manufacturing standards. Our portfolio is probably one of the largest ones in the industry, with an incredible diversified range of options such as Reachins, Wine coolers, Undercounters, Prep Tables, Milk Coolers, Retro Refrigerators, Blast Chillers & Shock Freezers, Sushi Cases, Supermarket cases, Euro-style bakery cases, Gelato cases, Air Curtains Grab n' Go cases, and much more ...

We look forward to serve you soon

*INFRICO USA Team*

# STRENGTHS



## 01. SANITATION

- The interior cabinet is built with rounded corners (extensive radius to facilitate cleaning).
- Adjustable feet to help levelling the equipment on the floor.
- 4" diameter casters with locks on front set, for easy mobility on site.
- Optional 4" Backsplash available on our undercounter units.
- Ability to take off shelves and tray slides to properly clean the interior cabinet.
- Internal drain plug for high water pressure cleaning.



## 02. CABINET

- Insulation by free CFC's polyurethane high-pressure injected with a density of 40 Kg/m<sup>3</sup>.
- Exteriors and Interiors built-in Stainless Steel AISI 304 (Top, Back, Bottom, Side, Front and Inner doors).
- Stainless Steel AISI 304 (American Iron and Steel Institute 304), Austenitic Cr-Ni Stainless Steel, High ductility, excellent drawing, forming and spinning properties.



## 03. DOORS

- Hinges built with self-closing systems and stay open feature.
- Triple layer door gasket easy to remove
  - 100% made of PVC, fully resistant against mould, mildew and greasy acids,
- Integrated door handle, rounded on the inside to prevent finger cuttings.
- Field reversible door feature available on single section uprights and all our horizontal equipment.



## 04. CONTROL SYSTEM

- Digital controllers, programmable and 100% hermetic.
- Higher precision in the control of temperature.
- Ability to adjust temperature ranges and set points.
- Digital temperature and data display.
- The temperature probes are NTC type and are closed and sealed, responsible for controlling the temperature of the cabinet and the defrost cycle.

# STRENGTHS




## 05. REFRIGERATION SYSTEM

- Our forced air condensation systems allow customers to have an efficient and fast exchange of temperatures in the unit that translate into a better performance of the equipment.
- Extractable refrigeration decks and use of Stainless Steel evaporative trays,
- Hot gas defrosting systems.
- Forced air evaporator systems, allowing an optimum performance and unifying the temperatures in the interior of the machine.
- Anti-corrosion evaporators.
- Use of compact Monoblocks [INFRIBLOCK®] on our top mounted equipment, for easy service, cleaning and repair.



## 06. 100% TESTED

- All our condensing units are tested 100% in helium gas chambers called "GALILEO TP", to prevent refrigerant leaks.
- Three tests are performed on each circuit sealing along the production line: Nitrogen - Helium - Refrigerant.
- Our Laboratories are approved according to Council Directive DC 2004/108/CE of Electrical Safety and Electromagnetic Compatibility DC 2006/95/CE.
- The tracking system allows us to identify, inspect, control, and approve our products.
- AENOR audited and certified by ISO 9001:2008 [Quality], ISO 14001:2004 [Environmental] and OSHAS 18001:2007 [Labour Safety].
- Audited and certified by INTERTEK to fulfil the UL 471 and NSF-7 standards; applicable in the U.S. and Canadian markets.

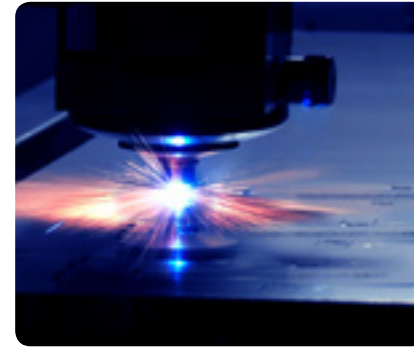

## 07. QUALITY ASSURANCE & CONTINUOUS IMPROVEMENT

- Heavy gauge materials for better field results.
- Our Evaporators are treated with corrosion coating, for longer life durability of our equipment.
- LED lighting in all our units, to reduce the energy consumption by 90% compared to a traditional fluorescent bulb. Providing brighter product presentation.
- Permanently committed with the innovation, improving cooling systems and using the newest materials and components in our new designs.



## 08. CUSTOMER SERVICE

- INFRICO After Sales Service [SAT] is focused on advising, care, repair and delivery of spare parts to customer service.
- INFRICO has a large group of high experienced sales representative firms to cover our after sales needs.
- INFRICO offers a 2 years parts & labour warranty for all its products, including a total 6 year compressor warranty.

## 09. INFRICO - ENVIRONMENTAL FRIENDLY



- Infrico, continuing its policy of respecting and preserving the environment is certified by ISO 14001:2004.
- Compliant with all federal requirements. Some of our initiatives include waste reduction, recycling and friendly packaging solutions.
- Committed to eco-design, and reduced energy consumption.
- CFC's polyurethane insulation, high-pressure injected with density of 40 Kg/m<sup>3</sup>. Use of R-134a & R-404A refrigerants.
- LED lighting, reducing energy consumption by 90% compared to traditional fluorescent lights.
- Oversized Condensers & Evaporators to improve energy efficiency and performance.
- Coated Condensers & Evaporators with anticorrosion material to prevent leaks.
- Latest compressor generations for high efficiency and lowest noise levels.
- Hot gas defrost.
- Triple magnetic chamber gasket to avoid cold lost.
- Automatic defrost system.
- High efficiency EBM fan motors.
- Doble & Triple tempered glass door with Argon gas.
- Continuous CO<sub>2</sub> reduction initiatives to fight Global Warming .
- Our product line is in process of DOE compliance for 2016.

## 10. STOCK AND PRODUCTION

INFRICO has permanent local stock in Miami FL for immediately delivery, as well as stock reserved in the factory. We have the flexibility in production to manufacture one equipment between 2-3 weeks, being able to transport and delivering in 4 more weeks nationwide in the U.S. territory.



**1 REACH-IN REFRIGERATORS & FREEZERS**



P. 10

**2 BLAST CHILLERS & SHOCK FREEZERS**



P. 26

**3 UNDERCOUNTERS**



P. 38

**4 FOOD PREP TABLES**



P. 48

**5 CHEF BASES**



P. 58

6

**COOLERS & WINE CELLARS**



P. 62

7

**DISPLAY CASES**



P. 76

8

**COUNTER TOP  
DISPLAY CASES**



P. 94

9

**AIR CURTAINS**



P. 104

10

**ACCESORIES  
& PARTS**



P. 110

REACH-IN  
REFRIGERATORS  
& FREEZERS

BLAST CHILLERS &  
SHOCK FREEZERS

UNDERCOUNTERS

FOOD PREP TABLES

CHEF BASES

COOLERS &  
WINE CELLARS

DISPLAY CASES

COUNTER TOP  
DISPLAY CASES

AIR CURTAINS


ACCESORIES  
& PARTS



# REACH-IN REFRIGERATORS & FREEZERS



# REACH-IN REFRIGERATORS & FREEZERS



## BOTTOM MOUNTED REACH-IN REFRIGERATORS & FREEZERS

| MODELS     | DESCRIPTION   | PAGE |
|------------|---|------|
| IRR-AN23   | 1 Solid Door Refrigerator - 23ft <sup>3</sup>       | 12   |
| IRR-AN49   | 2 Solid Doors Refrigerator - 49ft <sup>3</sup>      | 12   |
| IRR-AN67   | 3 Solid Doors Refrigerator - 67ft <sup>3</sup>      | 12   |
| IRR-AN23BT | 1 Solid Door Freezer - 23ft <sup>3</sup>            | 14   |
| IRR-AN49BT | 2 Solid Doors Freezer - 49ft <sup>3</sup>           | 14   |
| IRR-AN67BT | 3 Solid Doors Freezer - 67ft <sup>3</sup>           | 14   |
| IRR-AN49MX | 2 Solid Doors, Dual Temperature - 49ft <sup>3</sup> | 14   |
| IRR-AN23CR | 1 Glass Door Refrigerator - 23ft <sup>3</sup>       | 16   |
| IRR-AN49CR | 2 Glass Doors Refrigerator - 49ft <sup>3</sup>      | 16   |
| IRR-AN67CR | 3 Glass Doors Refrigerator - 67ft <sup>3</sup>      | 16   |

## TOP MOUNTED REACH-IN REFRIGERATORS & FREEZERS

| MODELS        | DESCRIPTION                                     | PAGE |
|---------------|---|------|
| IRR-AGB23     | 1 Solid Door Refrigerator - 23 ft <sup>3</sup>  | 18   |
| IRR-AGB49     | 2 Solid Doors Refrigerator - 49 ft <sup>3</sup> | 18   |
| IRR-AGB23-2   | 2 Solid Doors Refrigerator - 23 ft <sup>3</sup> | 18   |
| IRR-AGB49-4   | 4 Solid Doors Refrigerator - 49 ft <sup>3</sup> | 18   |
| IRR-AGB23BT   | 1 Solid Door Freezer - 23 ft <sup>3</sup>       | 20   |
| IRR-AGB49BT   | 2 Solid Doors Freezer - 49 ft <sup>3</sup>      | 20   |
| IRR-AGB23CR   | 1 Glass Door Refrigerator - 23 ft <sup>3</sup>  | 22   |
| IRR-AGB49CR   | 2 Glass Doors Refrigerator - 49 ft <sup>3</sup> | 22   |
| IRR-AGB23CR-2 | 2 Glass Door Refrigerator -23 ft <sup>3</sup>   | 22   |
| IRR-AGB49CR-4 | 4 Glass Door Refrigerator -49 ft <sup>3</sup>   | 22   |


## ROLL-IN ROLL-THRU REFRIGERATORS & FREEZERS

| MODELS        | DESCRIPTION   | PAGE |
|---------------|---|------|
| IRR-AGB45RI   | 1 Section Roll-In Refrigerator With 66-1/4" Cart Capacity   | 24   |
| IRR-AGB96RI   | 2 Section Roll-In Refrigerator With 66-1/4" Cart Capacity   | 24   |
| IRR-AGB45RT   | 1 Section Roll-Thru Refrigerator With 66-1/4" Cart Capacity | 24   |
| IRR-AGB45RIBT | 1 Section Roll-In Freezer With 66-1/4" Cart Capacity        | 24   |
| IRR-AGB96RIBT | 2 Section Roll-In Freezer With 66-1/4" Cart Capacity        | 24   |

REACH-IN

# BOTTOM MOUNTED REACH-IN REFRIGERATORS

ETL LISTED TO UL471 standard and sanitation classified to NSF / We reserve the right to change specifications without prior notice

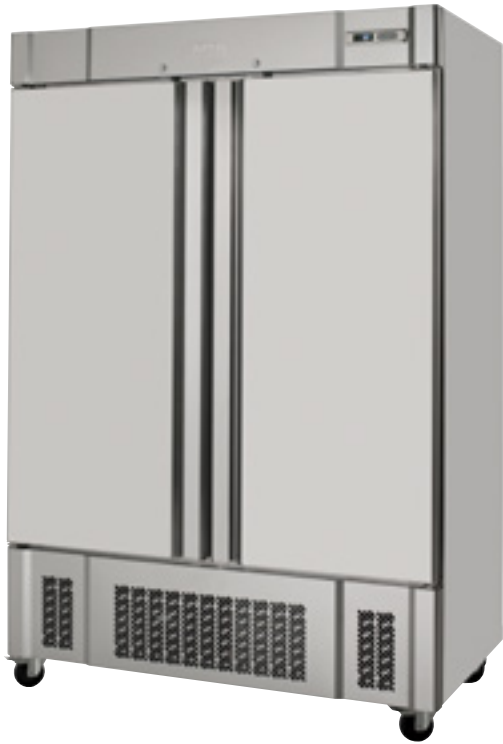

IRR-AN49



IRR-AN23



Interior features of IRR-AN23 model



Interior features of IRR-AN23 model

| MODELS          | Overall Dimensions |        |        | Doors | Shelves | Temp (°F) | Volume (ft³) | Power (HP) | Amps (115V) | Weight (Lbs) | Price (\$)     |
|-----------------|--------------------|--------|--------|-------|---------|-----------|--------------|------------|-------------|--------------|----------------|
| <b>IRR-AN23</b> | 27                 | 31-1/8 | 83-3/8 | 1     | 3       | 33°F/38°F | 23.0         | 1/3        | 6.7         | 306          | <b>\$5,300</b> |
| <b>IRR-AN49</b> | 54-1/2             | 31-1/8 | 83-3/8 | 2     | 6       | 33°F/38°F | 49.0         | 1/2        | 8.7         | 432          | <b>\$7,100</b> |
| <b>IRR-AN67</b> | 82                 | 31-1/8 | 83-3/8 | 3     | 9       | 33°F/38°F | 67.0         | 3/4        | 10.75       | 606          | <b>\$9,200</b> |

Height does already include 5-1/8" for casters

REACH-IN

## BOTTOM MOUNTED REACH-IN REFRIGERATORS



IRR-AN67

### STANDARD FEATURES




- EXTERIOR:** - AISI 430 stainless steel
- INTERIOR:** - AISI 430 stainless steel  
- Sealed interior floors and rounded cabinet corners  
- LED LIGHTING  
- Internal drain plug for easy cleaning.
- INSULATION:** - CFC-Free polyurethane insulation, entire cabinet structure is foamed-in place using a high density polyurethane insulation,  
- Low GWP & Zero ODP effect.
- DOORS:** - Polyurethane insulated doors,  
- Self closing doors with stay open feature,  
- Stainless Steel heavy-duty hinges,  
- Triple chamber snap in door gaskets for easy removal and cleaning,  
- Field reversible doors,  
- Doors locks,  
- Full-height door opening [23"x53"].
- SHELVING:** - [3] Three plastic coated wire shelves per door with stainless steel tray slides included,  
- Tray slides are compatible with 18"x26" and 12"x20" sheet pans,  
- Plastic coated tray divider [except IRR-AN23].
- REFRIGERATION:** - Digital temperature controller with automatic defrost system,  
- Drain pan with condensate heater,  
- Evaporator coil coated with anti-corrosion material 100% Polyester,  
- Forced air refrigeration system,  
- Refrigerant gas R134a.
- ELECTRICAL:** - Cord and NEMA 5-15P plug,  
- Electrical connection is 115V / 1ph / 60Hz.

REACH-IN

# BOTTOM MOUNTED REACH-IN FREEZERS



IRR-AN23BT

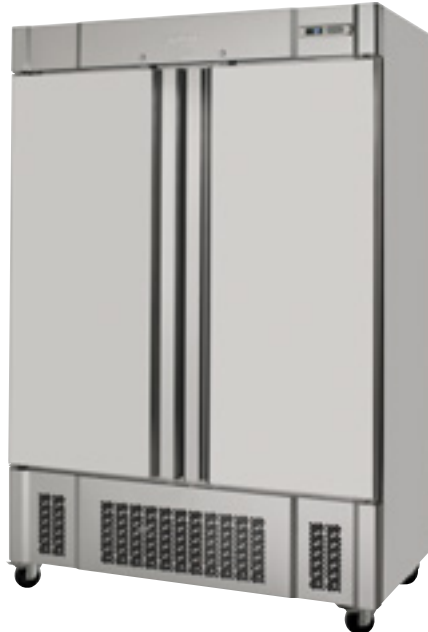

IRR-AN49BT



IRR-AN23

MODELS

Overall Dimensions    Doors    Shelves    (°F)    (ft<sup>3</sup>)    (HP)    115V    220V    [Lbs]    (\$)

SOLID DOORS FREEZERS

|                   |        |        |        |   |   |          |      |       |      |      |     |                 |
|-------------------|--------|--------|--------|---|---|----------|------|-------|------|------|-----|-----------------|
| <b>IRR-AN23BT</b> | 27     | 31-1/8 | 83-3/8 | 1 | 3 | -5°F/0°F | 23.0 | 5/8   | 11.7 | -    | 313 | <b>\$6,800</b>  |
| <b>IRR-AN49BT</b> | 54-1/2 | 31-1/8 | 83-3/8 | 2 | 6 | -5°F/0°F | 49.0 | 1-1/4 | 15.6 | -    | 454 | <b>\$8,900</b>  |
| <b>IRR-AN67BT</b> | 82     | 31-1/8 | 83-3/8 | 3 | 9 | -5°F/0°F | 67.0 | 1+1   | 3.9  | 12.0 | 640 | <b>\$11,850</b> |

DUAL TEMPERATURE REFRIGERATOR AND FREEZER

|                   |        |        |        |   |   |                       |              |            |      |   |     |                 |
|-------------------|--------|--------|--------|---|---|-----------------------|--------------|------------|------|---|-----|-----------------|
| <b>IRR-AN49MX</b> | 54-1/2 | 31-1/8 | 83-3/8 | 2 | 6 | 33°F/38°F<br>-5°F/0°F | 23.0<br>23.0 | 1/3<br>5/8 | 18.7 | - | 520 | <b>\$10,750</b> |
|-------------------|--------|--------|--------|---|---|-----------------------|--------------|------------|------|---|-----|-----------------|

Height does already include 5-1/8" for casters

ETL LISTED TO UL471 standard and sanitation classified to NSF / We reserve the right to change specifications without prior notice

REACH-IN

# BOTTOM MOUNTED REACH-IN FREEZERS



IRR-AN49MX

## STANDARD FEATURES



- EXTERIOR:** - AISI 430 stainless steel
- INTERIOR:** - AISI 430 stainless steel
  - Sealed interior floors and rounded cabinet corners
  - LED LIGHTING
  - Internal drain plug for easy cleaning.
- INSULATION:** - CFC-Free polyurethane insulation, entire cabinet structure is foamed-in place using a high density polyurethane insulation,
  - Low GWP & Zero ODP effect.
- DOORS:** - Polyurethane insulated doors,
  - Self closing doors with stay open feature,
  - Stainless Steel heavy-duty hinges,
  - Triple chamber snap in door gaskets for easy removal and cleaning,
  - Field reversible doors,
  - Doors locks,
  - Full-height door opening [23"x53"],
  - Heated door frame to avoid accumulation of ice.
- SHELVING:** - [3] Three plastic coated wire shelves per door with stainless steel tray slides included,
  - Tray slides are compatible with 18"x26" and 12"x20" sheet pans,
  - Plastic coated tray divider [except IRR-AN23BT].
- REFRIGERATION:** - Digital temperature controller with automatic defrost system,
  - Expansion valve and hot gas defrost system for low temp units,
  - Drain pan with condensate heater,
  - Evaporator coil coated with anti-corrosion material 100% Polyester,
  - Forced air refrigeration system,
  - Refrigerant gas R404A,
  - Each compartment has its own refrigeration system [MX] [R134a in refrigeration section].
- ELECTRICAL:** - Cord and NEMA 5-20P plug, [BT and MX models]. Electrical connection is 115V/1ph/60Hz,
  - Cord and NEMA L14-30P plug, [IRR-AN67BT model]. Electrical connection are 220V [Compressor] and 115V [Digital control] / 1ph / 60Hz.

REACH-IN

# BOTTOM MOUNTED REACH-IN GLASS DOOR REFRIGERATOR



IRR-AN23CR



IRR-AN49CR

ETL LISTED TO UL471 standard and sanitation classified to NSF / We reserve the right to change specifications without prior notice

| MODELS            | →                  | ↗      | ↑      | 🚪     | 📏       | 🌡️        | 📦     | ⚙️   | ⚡<br>[Amps]<br>115V | 🏷️<br>[Lbs] | 💰<br>[\$]       |
|-------------------|--------------------|--------|--------|-------|---------|-----------|-------|------|---------------------|-------------|-----------------|
|                   | Overall Dimensions |        |        | Doors | Shelves | (°F)      | (ft³) | [HP] |                     |             |                 |
| <b>IRR-AN23CR</b> | 27                 | 31-1/8 | 83-3/8 | 1     | 4       | 33°F/38°F | 23.0  | 3/8  | 8.4                 | 340         | <b>\$5,870</b>  |
| <b>IRR-AN49CR</b> | 54-1/2             | 31-1/8 | 83-3/8 | 2     | 8       | 33°F/38°F | 49.0  | 5/8  | 11.6                | 538         | <b>\$9,100</b>  |
| <b>IRR-AN67CR</b> | 82                 | 31-1/8 | 83-3/8 | 3     | 12      | 33°F/38°F | 67.0  | 3/4  | 11.15               | 723         | <b>\$11,900</b> |

Height does already include 5-1/8" for casters

REACH-IN

# BOTTOM MOUNTED REACH-IN GLASS DOOR REFRIGERATORS

## STANDARD FEATURES



**EXTERIOR:** - AISI 430 stainless steel

**INTERIOR:** - AISI 430 stainless steel  
 - Sealed interior floors and rounded cabinet corners  
 - LED LIGHTING  
 - Internal drain plug for easy cleaning.

**INSULATION:** - CFC-Free polyurethane insulation, entire cabinet structure is foamed-in place using a high density polyurethane insulation,  
 - Low GWP & Zero ODP effect.

**DOORS:** - Self closing doors with stay open feature,  
 - Doors locks,  
 - Triple chamber snap in door gaskets for easy removal and cleaning,  
 - Field reversible doors,  
 - Door built-in Thermopane double glass,  
 - Full-height door opening [23"x53"].

**SHELVING:** - (4) Four plastic coated extra-dense wire shelves per door with stainless steel tray slides included,  
 - Tray slides are compatible with 18"x26" and 12"x20" sheet pans,  
 - Plastic coated tray divider [except IRR-AN23CR].

**REFRIGERATION:** - Digital temperature controller with automatic defrost system,  
 - Drain pan with condensate heater,  
 - Evaporator coil coated with anti-corrosion material 100% Polyester,  
 - Forced air refrigeration system,  
 - Refrigerant gas R134a.

**ELECTRICAL:** - Cord and NEMA 5-15P plug,  
 - Electrical connection is 115V / 1ph / 60Hz.

**OPTIONS:** - Stainless Steel wire shelves,  
 - Stainless Steel tray divider,  
 - Additional slide kits,  
 - Set of 6" legs, height adjustable from 5" to 8".

Please, Consult the prices and codes in section accessories.



IRR-AN67CR

REACH-IN

## TOP MOUNTED REACH-IN REFRIGERATORS



IRR-AGB23



IRR-AGB23-2



IRR-AGB49-4

| MODELS             | →                  | ↗      | ↑  | 🚪     | 🚪       | 🌡️        | 📏                  | ⚙️   | ⚠️             | 📏     | 💰               |
|--------------------|--------------------|--------|----|-------|---------|-----------|--------------------|------|----------------|-------|-----------------|
|                    | Overall Dimensions |        |    | Doors | Shelves | (°F)      | (ft <sup>3</sup> ) | (HP) | (Amps)<br>115V | (Lbs) | (\$)            |
| <b>IRR-AGB23</b>   | 27                 | 31-1/4 | 84 | 1     | 3       | 33°F/38°F | 23.0               | 1/3  | 5.0            | 320   | <b>\$7,000</b>  |
| <b>IRR-AGB49</b>   | 54-1/2             | 31-1/4 | 84 | 2     | 6       | 33°F/38°F | 49.0               | 1/2  | 7.0            | 507   | <b>\$10,300</b> |
| <b>IRR-AGB23-2</b> | 27                 | 31-1/4 | 84 | 2     | 3       | 33°F/38°F | 23.0               | 1/3  | 5.0            | 324   | <b>\$7,100</b>  |
| <b>IRR-AGB49-4</b> | 54-1/2             | 31-1/4 | 84 | 4     | 6       | 33°F/38°F | 49.0               | 1/2  | 7.0            | 507   | <b>\$10,500</b> |

Height does already include 5-1/8" for casters

ETL LISTED TO UL471 standard and sanitation classified to NSF / We reserve the right to change specifications without prior notice

REACH-IN

## TOP MOUNTED REACH-IN REFRIGERATORS

### STANDARD FEATURES



IRR-AGB49

**EXTERIOR:** - AISI 304 stainless steel

**INTERIOR:** - AISI 304 stainless steel  
 - Sealed interior floors and rounded cabinet corners  
 - LED LIGHTING  
 - Internal drain plug for easy cleaning.

**INSULATION:** - CFC-Free polyurethane insulation, entire cabinet structure is foamed-in place using a high density polyurethane insulation,  
 - Low GWP & Zero ODP effect.

**DOORS:** - Polyurethane insulated doors,  
 - Self closing doors with stay open feature,  
 - Stainless Steel heavy-duty hinges,  
 - Triple chamber snap in door gaskets for easy removal and cleaning,  
 - Field reversible doors,  
 - Doors locks,  
 - Full-height door opening [22-7/8" x 58-5/8"].

**SHELVING:** - [3] Three plastic coated wire shelves per door with stainless steel tray slides included,  
 - Tray slides are compatible with 18"x26" and 12"x20" sheet pans.  
 - Plastic coated tray divider [except IRR-AGB23 and IRR-AGB23-2].

**REFRIGERATION:** - Digital temperature controller with automatic defrost system,  
 - Compact refrigeration system monoblock, INFRIBLOCK<sup>®</sup>,  
 - Energy-saving non-electric condensate pan,  
 - Evaporator coil coated with anti-corrosion material 100% Polyester,  
 - Forced air refrigeration system,  
 - Refrigerant gas R134a.

**ELECTRICAL:** - For Refrigerators: Cord and NEMA 5-15P plug,  
 - Electrical connection is 115V / 1ph / 60Hz.

**OPTIONS:** - Stainless Steel wire shelves,  
 - Stainless Steel tray divider,  
 - Additional slide kits,  
 - Set of 6" legs, height adjustable from 5" to 8".

Please, Consult the prices and codes in section accessories.

REACH-IN

# TOP MOUNTED REACH-IN SOLID DOOR FREEZERS



IRR-AGB23BT



IRR-AGB49BT



**I** INFRIBLOCK

Compact refrigeration system monoblock



Interior features of IRR-AGB23BT

MODELS

- Overall Dimensions
- ↗
- ↑
- 🚪 Doors
- 📏 Shelves
- 🌡️ (°F)
- 📦 (ft³)
- ⚙️ (HP)
- ⚡ (Amps) 115V
- 📖 [Lbs]
- 💰 (\$) [S]

SOLID DOORS FREEZERS

|                    |        |        |    |   |   |          |      |       |      |     |                 |
|--------------------|--------|--------|----|---|---|----------|------|-------|------|-----|-----------------|
| <b>IRR-AGB23BT</b> | 27     | 31-1/4 | 84 | 1 | 3 | -5°F/0°F | 23.0 | 5/8   | 10.0 | 331 | <b>\$8,500</b>  |
| <b>IRR-AGB49BT</b> | 54-1/2 | 31-1/4 | 84 | 2 | 6 | -5°F/0°F | 49.0 | 1-1/4 | 14.3 | 551 | <b>\$11,800</b> |

ETL LISTED TO UL471 standard and sanitation classified to NSF / We reserve the right to change specifications without prior notice

REACH-IN

## TOP MOUNTED REACH-IN SOLID DOOR FREEZERS

### STANDARD FEATURES



**EXTERIOR:** - AISI 304 stainless steel

**INTERIOR:** - AISI 304 stainless steel  
 - Sealed interior floors and rounded cabinet corners  
 - LED LIGHTING  
 - Internal drain plug for easy cleaning.

**INSULATION:** - CFC-Free polyurethane insulation, entire cabinet structure is foamed-in place using a high density polyurethane insulation,  
 - Low GWP & Zero ODP effect.

**DOORS:** - Polyurethane insulated doors,  
 - Self closing doors with stay open feature,  
 - Stainless Steel heavy-duty hinges,  
 - Triple chamber snap in door gaskets for easy removal and cleaning,  
 - Field reversible doors,  
 - Doors locks,  
 - Full-height door opening [22-7/8" x 58-5/8"].  
 - Heated door frame to avoid accumulation of ice.

**SHELVING:** - [3] Three plastic coated wire shelves per door with stainless steel tray slides included,  
 - Tray slides are compatible with 18"x26" and 12"x20" sheet pans.  
 - Plastic coated tray divider [except IRR-AGB23BT].

**REFRIGERATION:** - Digital temperature controller with automatic defrost system,  
 - Expansion valve and hot gas defrost system for low temp units,  
 - Compact refrigeration system monoblock, INFRIBLOCK<sup>®</sup>,  
 - Energy-saving non-electric condensate pan,  
 - Evaporator coil coated with anti-corrosion material 100% Polyester,  
 - Forced air refrigeration system,  
 - Refrigerant gas R404A.

**ELECTRICAL:** - Cord and NEMA 5-20P plug, electrical connection is 115V / 1ph / 60Hz,

**OPTIONS:** - Stainless Steel wire shelves,  
 - Stainless Steel tray divider,  
 - Additional slide kits,  
 - Set of 6" legs, height adjustable from 5" to 8".

Please, Consult the prices and codes in section accessories.



REACH-IN

# TOP MOUNTED REACH-IN SOLID DOOR REFRIGERATORS



IRR-AGB23CR



IRR-AGB49CR

REFRIGERATION AIR FLOW

MODELS

- Overall Dimensions
- ↗ Shelves
- ↑ Doors
- 📱 [ft<sup>3</sup>]
- 📄 [HP]
- 🌡️ [°F]
- ⚡ [Amps]
- ⚡ [115V]
- 📦 [Lbs]
- 💰 [€]

GLASS DOOR REFRIGERATORS

| Model                | Depth (in) | Width (in) | Height (in) | Doors | Shelves | Temp (°F) | Capacity (ft <sup>3</sup> ) | HP  | Amps | Weight (Lbs) | Price (€)       |
|----------------------|------------|------------|-------------|-------|---------|-----------|-----------------------------|-----|------|--------------|-----------------|
| <b>IRR-AGB23CR</b>   | 27         | 31-1/4     | 84          | 1     | 4       | 33°F/38°F | 23.0                        | 3/8 | 6.7  | 390          | <b>\$7,400</b>  |
| <b>IRR-AGB49CR</b>   | 54-1/2     | 31-1/4     | 84          | 2     | 8       | 33°F/38°F | 49.0                        | 5/8 | 9.9  | 516          | <b>\$10,700</b> |
| <b>IRR-AGB23CR-2</b> | 27         | 31-1/4     | 84          | 2     | 4       | 33°F/38°F | 23.0                        | 3/8 | 6.7  | 390          | <b>\$7,500</b>  |
| <b>IRR-AGB49CR-4</b> | 54-1/2     | 31-1/4     | 84          | 4     | 8       | 33°F/38°F | 49.0                        | 5/8 | 9.9  | 516          | <b>\$10,800</b> |

Height does already include 5-1/8" for casters

ETL LISTED TO UL471 standard and sanitation classified to NSF / We reserve the right to change specifications without prior notice

REACH-IN

## TOP MOUNTED REACH-IN GLASS DOOR REFRIGERATORS & FREEZERS

IRR-AGB49CR



### STANDARD FEATURES



- EXTERIOR:** - AISI 304 stainless steel
- INTERIOR:** - AISI 304 stainless steel  
- Sealed interior floors and rounded cabinet corners  
- LED LIGHTING  
- Internal drain plug for easy cleaning.
- INSULATION:** - CFC-Free polyurethane insulation, entire cabinet structure is foamed-in place using a high density polyurethane insulation,  
- Low GWP & Zero ODP effect.
- DOORS:** - Self closing doors with stay open feature,  
- Door built-in Thermopane double glass [Refrigerators models],  
- Triple chamber snap in door gaskets for easy removal and cleaning,  
- Field reversible doors,  
- Door locks,  
- Full-height door opening [22-7/8" x 58-5/8"],
- SHELVING:** - (4) Four plastic coated extra-dense wire shelves per door with stainless steel tray slides included,  
- Tray slides are compatible with 18"x26" and 12"x20" sheet pans.  
- Plastic coated tray divider [except IRR-AGB23CR and IRR-AGB23CR-2].
- REFRIGERATION:** - Digital temperature controller with automatic defrost system,  
- Compact refrigeration system monoblock, INFRIBLOCK®,  
- Energy-saving non-electric condensate pan,  
- Evaporator coil coated with anti-corrosion material 100% Polyester,  
- Forced air refrigeration system,  
- Refrigerant gas R134a,
- ELECTRICAL:** - For Refrigerators: Cord and NEMA 5-15P plug. Electrical connection is 115V/1ph/60Hz.
- OPTIONS:** - Stainless Steel wire shelves,  
- Stainless Steel tray divider,  
- Additional slide kits,  
- Set of 6" legs, height adjustable from 5" to 8".

Please, Consult the prices and codes in section accessories.

REACH-IN

**NEW**

# TOP MOUNTED REACH-IN REFRIGERATORS & FREEZERS - ROLL-IN & ROLL-THRU



IRR-AGB96RI




IRR-AGB45RI



**I** INFRIBLOCK

Compact refrigeration system monoblock

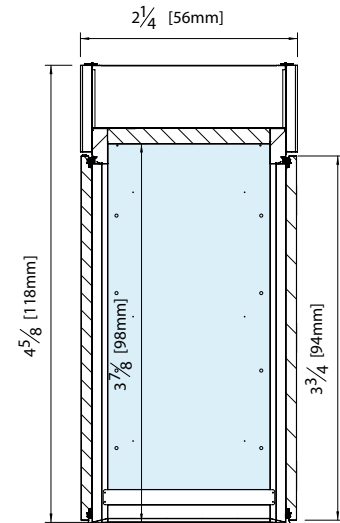

ETL LISTED TO UL471 standard and sanitation classified to NSF / We reserve the right to change specifications without prior notice

MODELS



Overall Dimensions

Doors

(°F)

(ft<sup>3</sup>)

(HP)

[Amps]  
115V

[Lbs]

(\$)

**GLASS DOOR REFRIGERATORS**

|                      |        |        |    |   |           |       |       |      |     |                 |
|----------------------|--------|--------|----|---|-----------|-------|-------|------|-----|-----------------|
| <b>IRR-AGB45RI</b>   | 37-1/4 | 41-3/4 | 93 | 1 | 33°F/38°F | 45.24 | 1/2   | 6.7  | 320 | <b>\$13,900</b> |
| <b>IRR-AGB96RI</b>   | 71-5/8 | 41-3/4 | 93 | 2 | 33°F/38°F | 96.3  | 5/8   | 9.9  | 507 | <b>\$15,900</b> |
| <b>IRR-AGB45RT</b>   | 37-1/4 | 41-3/4 | 93 | 2 | 33°F/38°F | 45.24 | 1/2   | 6.7  | 320 | <b>\$15,400</b> |
| <b>IRR-AGB45RIBT</b> | 37-1/4 | 41-3/4 | 93 | 1 | -5°F/0°F  | 45.24 | 5/8   | 10   | 331 | <b>\$19,100</b> |
| <b>IRR-AGB96RIBT</b> | 71-5/8 | 41-3/4 | 93 | 2 | -5°F/0°F  | 96.3  | 1-1/4 | 14.3 | 551 | <b>\$22,100</b> |

Height does already include 5-1/8" for casters

REACH-IN

NEW

# TOP MOUNTED REACH-IN REFRIGERATORS & FREEZERS - ROLL-IN & ROLL-THRU



## STANDARD FEATURES



- EXTERIOR:**
- AISI 304 stainless steel
  - Built with removable panel for easy installation,
  - Isolated lower side with 0,8" [20 mm] thick with ramp included
- INTERIOR:**
- AISI 304 stainless steel
  - Sealed interior floors and rounded cabinet corners
  - LED LIGHTING
- INSULATION:**
- CFC-Free polyurethane insulation, entire cabinet structure is foamed-in place using a high density polyurethane insulation,
  - Low GWP & Zero ODP effect.
- DOORS:**
- Polyurethane insulated doors,
  - Self closing doors with stay open feature,
  - Triple chamber snap in door seals for easy removal and cleaning,
  - Field reversible doors,
  - Full-height door opening [27-5/8" x 72-7/8"].
  - Heated door frame to avoid accumulation of ice [Freezer models].
- REFRIGERATION:**
- Digital temperature controller with automatic defrost system,
  - Expansion valve and hot gas defrost system for low temp units [Freezer models],
  - Compact refrigeration system monoblock, INFRIBLOCK<sup>®</sup>,
  - Energy-saving non-electric condensate pan,
  - Evaporator coil coated with anti-corrosion material 100% Polyester,
  - Forced air refrigeration system,
  - Refrigerant gas R134a,
  - Refrigerant gas R404A [Freezers models].
- ELECTRICAL:**
- For Refrigerators: Cord and NEMA 5-15P plug,
  - For Freezers: Cord and NEMA 5-20P plug,
  - Electrical connection is 115V / 1ph / 60Hz.



## 2 BLAST CHILLERS & SHOCK FREEZERS



# BLAST CHILLERS & FREEZERS

Heated door frame to avoid accumulation of ice

Slides are compatible with 18"x26" sheet pans or 12"x20" sheet pans



Triple chamber snap in door gasket for easy cleaning



AISI 304 Stainless Steel exterior & interior cabinet construction

Rounded corners & sealed interior floor, NSF7, including drain plug for cleaning



Self-closing doors with stay open feature




Model: ABT51L

Adjustable legs made in stainless steel

USB connection HACCP trazability

American compressor TECUMSEH, 115 V 60Hz.

**TOUCH SCREEN**  
Control panel with an easy to read screen and menu



## BLAST CHILLERS & SHOCK FREEZERS

| MODELS                                    | PAGE |
|---|------|
| How blast chillers work & cycle functions | 28   |
| Control panel                             | 30   |
| The Benefits                              | 31   |

| MODELS              | DESCRIPTION   | PAGE |
|---------------------|---|------|
| <b>IBC-ABT3 1S</b>  | Blast chillers & shock freezers - 3 trays             | 32   |
| <b>IBC-ABT5 1L</b>  | Blast chillers & shock freezers - 5 trays             | 32   |
| <b>IBC-ABT7 1L</b>  | Blast chillers & shock freezers - 7 trays             | 32   |
| <b>IBC-ABT10 1L</b> | Blast chillers & shock freezers - 10 trays            | 34   |
| <b>IBC-ABT14 1L</b> | Blast chillers & shock freezers - 14 trays            | 34   |
| <b>IBC-ABT20 1P</b> | Blast chillers & shock freezers, Roll-thru - 20 trays | 36   |
| <b>IBC-ABT20 1C</b> | Blast chillers & shock freezers, Roll-in - 20 trays   | 36   |

# HOW BLAST CHILLERS WORK & CYCLE FUNCTIONS







## HOW BLAST CHILLERS WORK

Blast chillers quickly reduce the core temperature of the products, whether they are cooked or fresh, conserving their fresh texture, hygiene and quality, whilst reducing the risk of bacteria generating.

The traditional method of storing cooked food has always been to leave it to cool naturally until it reaches a suitable temperature to store in the refrigerator.

During the period when the core temperature falls from 149°F and 50°F, the food will lose a lot of its natural characteristics, such as moisture, consistency, aroma and colour, furthermore, this is when bacteria begin to develop.

INFRICO BLAST CHILLERS are designed to reduce the time period for this critical change in temperature.

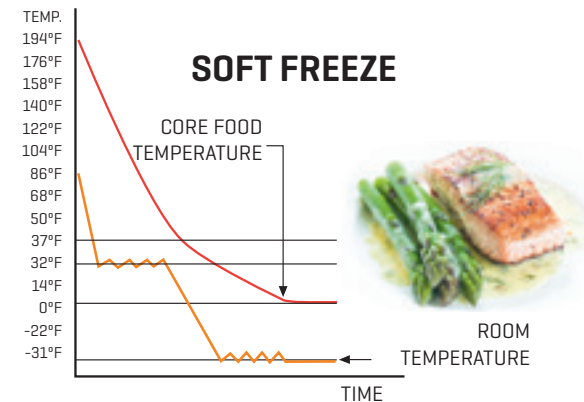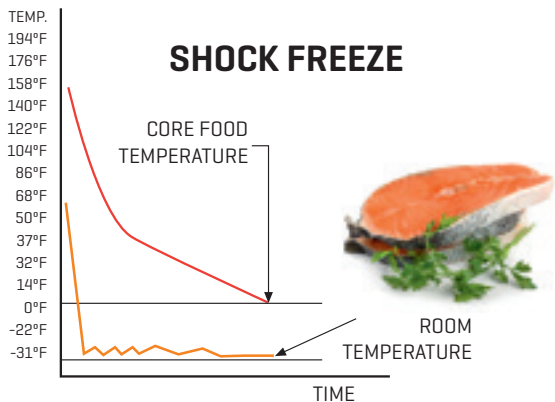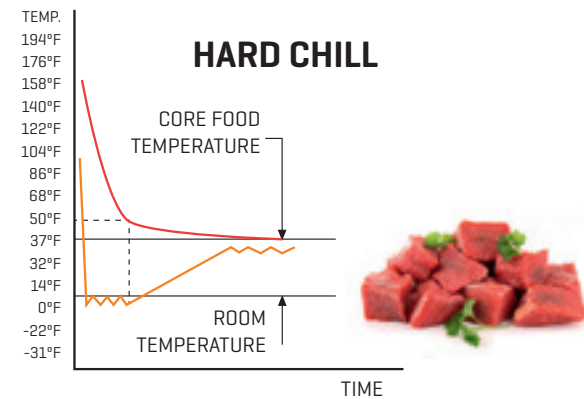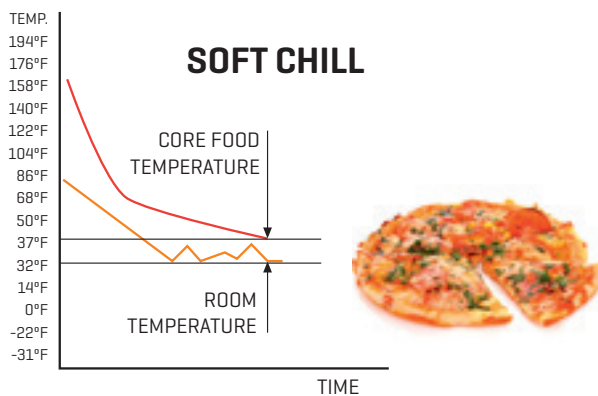

ETL LISTED TO UL471 standard and sanitation classified to NSF / We reserve the right to change specifications without prior notice

# BLAST CHILLERS & SHOCK FREEZERS




## Blastchilling

Blast chilling allows cooked food to maintain all of its original characteristics by quickly bringing the temperature down from 194°F to 37°F in less than 90 minutes and maintaining the temperature between 32°F and 41°F, conserving the quality, aroma, colour and consistency of the food.



## Shockfreezing

The blast freezing cycle quickly freezes cooked food, transforming the liquid within the food to micro-crystals of ice, without damaging the cellular structure of the food. The temperature of the interior of the food falls from 194°F to 0°F in less than 240 minutes.

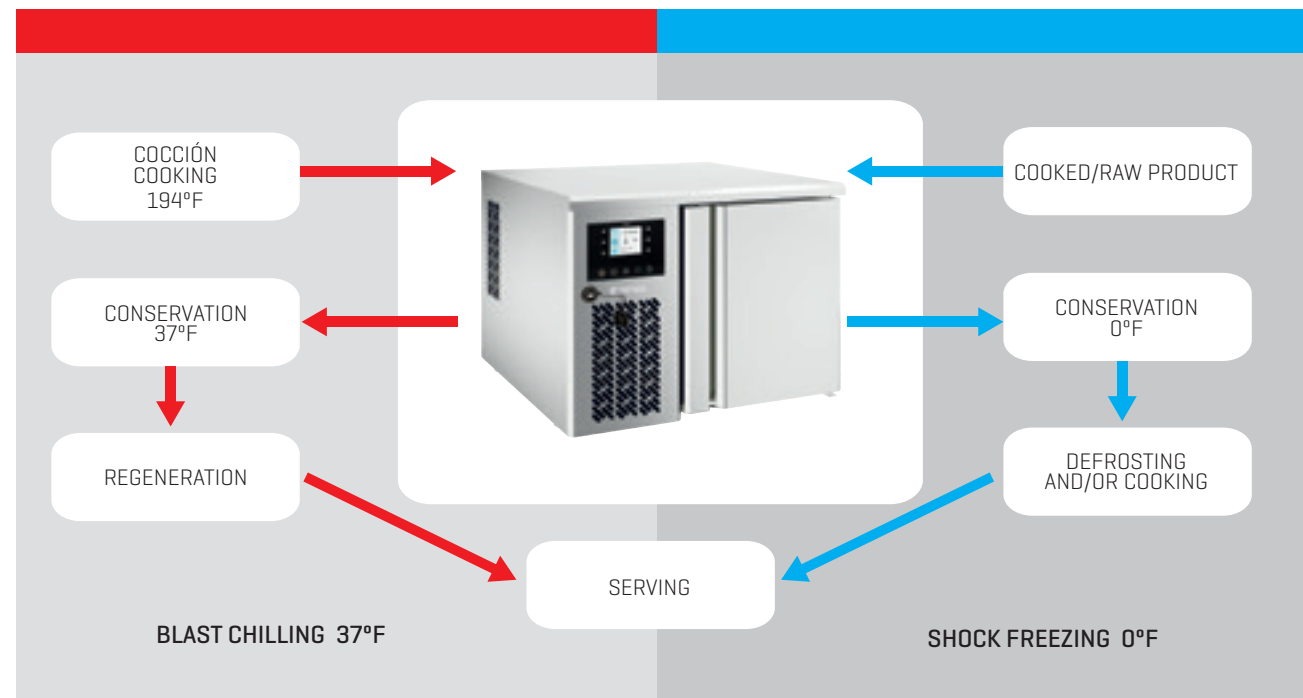

## CONTROL PANEL. "EASY & USER FRIENDLY CONTROLLER"



### CONTROL PANEL

1. Key **ON/OFF** - Turns the machine On or Off
2. Key **MENU** - Acces to the main menu
3. Key **HOME** - Turns the machine On or Off
4. Key **ESCAPE** - To override
5. Key **START/STOP** - Key cycle start / stop cycle
6. Interactive Keys
7. Interactive Keys



**AUGMENTED REALITY**  
[See instructions on the last page]

ETL LISTED TO UL471 standard and sanitation classified to NSF / We reserve the right to change specifications without prior notice

## THE BENEFITS



### HIGH QUALITY

High quality meals at any time, pleasing both the customer and the kitchen chef.



### CONTROLLED PURCHASES

Food purchases can be made at any time, making cost savings on seasonal food.



### FOOD SAFETY

Food safety on all your dishes as the chilling process fully conforms to the HACCP regulations.

INFRICO's range of blast chillers offer unbeatable benefits and advantages for your business.



### SAVING TIME

Save time by up to 30% by preparing meals in batches.



### LESS WASTE

Less waste as blast chilled and frozen dishes can be stored for longer periods of time.



### BETTER ORGANISATION

Better organisation in the kitchen, as food can be prepared independent of customer demand.




### MORE VARIED MENUS

A wider choice of quality dishes without any health risks.



### LESS WEIGHT LOSS

Less weight loss as the humidity and moisture of the food doesn't evaporate.



### BLAST CHILLER ...

... compatible with the main manufacturers of ovens. Accepts 18"x26" sheet pans.



### USB CONNECTION

Upload / Download of the configuration parameters.  
Upload / Download of the programs.  
Download of the information relative to the HACCP alarms.

BLAST CHILLERS & SHOCK FREEZERS

# BLAST CHILLERS & SHOCK FREEZERS

## IBC-ABT3 1S, IBC-ABT5 1L, IBC-ABT7 1L, IBC-ABT7 1M



IBC-ABT3 1S



IBC-ABT5 1L



IBC-ABT5 1L



IBC-ABT7 1M



IBC-ABT7 1L

| MODELS             | →                  | ↗       | ↑        | 📱     | 🌡️    | 🧊                                | ⚙️    | ⚠️          | 📏     | 💰               |
|--------------------|--------------------|---------|----------|-------|-------|----------------------------------|-------|-------------|-------|-----------------|
|                    | Overall Dimensions |         |          | Doors | (°F)  | Chilling/Freezing capacity (Lbs) | (HP)  | (Amps) 115V | (Lbs) | (\$)            |
| <b>IBC-ABT3 1S</b> | 28-3/8             | 28      | 21-5/8   | 1     | -40°F | 22/11                            | 1/2   | 8.8         | 216   | <b>\$11,500</b> |
| <b>IBC-ABT5 1L</b> | 33                 | 34-1/8  | 38-1/4   | 1     | -40°F | 44/26                            | 1     | 11.0        | 364   | <b>\$15,200</b> |
| <b>IBC-ABT7 1L</b> | 33                 | 34-1/8  | 45-1/4   | 1     | -40°F | 66/40                            | 1-1/4 | 12.3        | 419   | <b>\$17,300</b> |
| <b>IBC-ABT7 1M</b> | 57-13/16           | 27-9/16 | 33-15/32 | 1     | -40°F | 66/40                            | 1-1/4 | 12.5        | 467   | <b>\$17,900</b> |

Height does already include 5-1/8" for casters

ETL LISTED TO UL471 standard and sanitation classified to NSF / We reserve the right to change specifications without prior notice

# BLAST CHILLERS & SHOCK FREEZERS


## IBC-ABT3 1S, IBC-ABT5 1L, IBC-ABT7 1L, IBC-ABT7 1M



Infrico blast chiller & freezer provided for the MasterChef's spanish version

### STANDARD FEATURES



- EXTERIOR:**
- AISI 304 stainless steel
  - Compliant with HACCP regulations
- INTERIOR:**
- AISI 304 stainless steel
  - Sealed interior floors and rounded cabinet corners
  - Internal drain plug for easy cleaning.
  - Includes a heated conical probe which is easy to use and remove.
- INSULATION:**
- CFC-Free polyurethane insulation, entire cabinet structure is foamed-in place using a high density polyurethane insulation,
  - Low GWP & Zero ODP effect.
- DOORS:**
- Polyurethane insulated doors,
  - Self closing doors with stay open feature,
  - Stainless Steel heavy-duty hinges,
  - Triple chamber snap in door gaskets for easy removal and cleaning,
  - Field reversible doors, except IBC-ABT31S,
  - Heated door frame to avoid accumulation of ice.
- SHELVING:**
- Compatible with 12" x 20" sheet pans in IBC-ABT31S (3 pans) and IBC-ABT71M (7 pans).
  - Compatible with 18"x26" sheet pans in IBC-ABT51L (5 pans) and IBC-ABT71L (7 trays).
- LEGS:**
- Stainless Steel adjustable legs [except IBC-ABT31S],
  - Levelling feet, only IBC-ABT31S.
- REFRIGERATION:**
- Control panel with an easy to read screen and menu,
  - Manual defrost during cycles and automatic defrost during maintenance,
  - Evaporator coil coated with anti-corrosion material 100% Polyester,
  - Forced air refrigeration system,
  - Refrigerant gas R404A,
  - Drain pan with condensate heater,
  - Blast chilling: +194°F to +37°F in less than 90 minutes,
  - Blast freezing: +194°F to 0°F in less than 4 hours,
- DIGITAL CONTROL:**
- Interactive control screen & menu,
  - Up to 99 different customized cycles,
  - USB Connection. 
- ELECTRICAL:**
- Cord and NEMA 5-15P plug [IBC-ABT31S],
  - Cord and NEMA 5-20P plug [IBC-ABT51L/ABT71L],
  - Electrical connection is 115V / 1ph / 60Hz [IBC-ABT31S/ABT51L/ABT71L],
  - MUST BE connected to 30 Amp. circuit breaker!.

BLAST CHILLERS & SHOCK FREEZERS

# BLAST CHILLERS & SHOCK FREEZERS

## IBC-ABT10 1L, IBC-ABT14 1L



USB connection  
HACCP  
traceability

Optional legs

IBC-ABT10 1L / IBC-ABT14 1L

| MODELS              | →                  | ↗      | ↑      | 🚪     | 📦       | 🌡️    | 🧊                                | ⚙️    | ⚡           | 🔌    | 📏     | 💰               |
|---------------------|--------------------|--------|--------|-------|---------|-------|----------------------------------|-------|-------------|------|-------|-----------------|
|                     | Overall Dimensions |        |        | Doors | Shelves | (°F)  | Chilling/Freezing capacity (Lbs) | (HP)  | 115V (Amps) | 230V | (Lbs) | (\$)            |
| <b>IBC-ABT10 1L</b> | 33                 | 34-1/8 | 68-1/2 | 1     | 3       | -40°F | 88/55                            | 2     | 3.5         | 17   | 492   | <b>\$22,800</b> |
| <b>IBC-ABT14 1L</b> | 33                 | 34-1/8 | 68-1/2 | 1     | 6       | -40°F | 110/66                           | 2-1/2 | 3.5         | 18   | 653   | <b>\$32,500</b> |

Height does already include 5-1/8" for casters

ETL LISTED TO UL471 standard and sanitation classified to NSF / We reserve the right to change specifications without prior notice

# BLAST CHILLERS & SHOCK FREEZERS

## IBC-ABT10 1L, IBC-ABT14 1L



IBC-ABT10 1L

USB connection  
HACCP

### STANDARD FEATURES






- EXTERIOR:**
  - AISI 304 stainless steel
  - Compliant with HACCP regulations
- INTERIOR:**
  - AISI 304 stainless steel
  - Sealed interior floors and rounded cabinet corners
  - Internal drain plug for easy cleaning.
  - Includes a heated conical probe which is easy to use and remove.
- INSULATION:**
  - CFC-Free polyurethane insulation, entire cabinet structure is foamed-in place using a high density polyurethane insulation,
  - Low GWP & Zero ODP effect.
- DOORS:**
  - Polyurethane insulated doors,
  - Self closing doors with stay open feature,
  - Stainless Steel heavy-duty hinges,
  - Triple chamber snap in door gaskets for easy removal and cleaning,
  - Heated door frame to avoid accumulation of ice.
- SHELVING:**
  - Compatible with any oven [12"x20" and 18"x26" sheet pans].
- REFRIGERATION:**
  - Control panel with an easy to read screen and menu,
  - Manual defrost during cycles and automatic defrost during maintenance,
  - Evaporator coil coated with anti-corrosion material 100% Polyester,
  - Forced air refrigeration system,
  - Refrigerant gas R404A,
  - Drain pan with condensate heater,
  - Blast chilling: +194°F to +37°F in less than 90 minutes,
  - Blast freezing: +194°F to 0°F in less than 4 hours.
- DIGITAL CONTROL:**
  - Interactive control screen & menu,
  - Up to 99 different customized cycles,
  - USB Connection.
- ELECTRICAL:**
  - Cord and NEMA L14-30P plug,
  - Electrical connection are 220V [Compressor] and 115V [Digital control] / 1ph / 60Hz,
  - MUST BE connected to 30 Amp. circuit breaker!

BLAST CHILLERS & SHOCK FREEZERS

# BLAST CHILLERS & SHOCK FREEZERS IBC-AB20 1P, IBC-ABT20 1C, IBC-ABT20 1S











PLEASE CONSULT FOR LEAD TIME

**CAR ENTRY**

- C**  Wheels inside
- S**  Wheels outside
- P**  Pass-throw



ETL LISTED TO UL471 standard and sanitation classified to NSF / We reserve the right to change specifications without prior notice

| MODELS               |  |  |  |  |  |  |  |  |  |  |
|----------------------|---|---|---|---|---|---|---|---|---|---|
|                      | Overall Dimensions  |   |   | Doors   | (°F)  | Chilling/Freezing capacity (Lbs)  | (HP)  | [Amps] 115V   | [Lbs]   | [\$]  |
| <b>IBC-ABT20 1P</b>  | 47-1/4  | 46-7/8  | 89-3/4  | 2   | -40°F   | 180/120   | 4   | 5.0   | 962   | <b>\$51,000</b>   |
| <b>IBC-ABT20 1C</b>  | 47-1/4  | 46-7/8  | 89-3/4  | 1   | -40°F   | 180/120   | 4   | 5.0   | 940   | <b>\$47,000</b>   |
| <b>IBC-ABT20 1S*</b> | 47-1/4  | 43-1/8  | 107-1/4   | 1   | -40°F   | 180/120   | 4   | 15.0  | 1093  | <b>\$48,000</b>   |

**NEW**

NOW AVAILABLE WITH CONDENSING UNIT INCLUDED

\*COMPATIBLE WITH **RATIONAL**


# BLAST CHILLERS & SHOCK FREEZERS

## IBC-AB20 1P, IBC-ABT20 1C



IBC-ABT20 1P

### STANDARD FEATURES

- EXTERIOR:**
- AISI 304 stainless steel
  - Compliant with HACCP regulations
  - Compatible with any American pastry rack on wheels.
- INTERIOR:**
- AISI 304 stainless steel
  - Sealed interior floors and rounded cabinet corners
  - Includes a heated conical probe which is easy to use and remove.
- INSULATION:**
- CFC-Free polyurethane insulation, entire cabinet structure is foamed-in place using a high density polyurethane insulation,
  - Low GWP & Zero ODP effect.
- DOORS:**
- Polyurethane insulated doors,
  - Self closing doors with stay open feature,
  - Heavy-duty hinges with horizontal and vertical adjustment,
  - Triple chamber snap in door gaskets for easy removal and cleaning,
  - Heated door frame to avoid accumulation of ice.
- REFRIGERATION:**
- Control panel with an easy to read screen and menu,
  - Manual defrost during cycles and automatic defrost during maintenance,
  - Evaporator coil coated with anti-corrosion material 100% Polyester,
  - Forced air refrigeration system,
  - Refrigerant gas R404A,
  - Blast chilling: +194°F to +37°F in less than 90 minutes,
  - Blast freezing: +194°F to 0°F in less than 4 hours.
- DIGITAL CONTROL:**
- Interactive control screen & menu,
  - Up to 99 different customized cycles,
  - USB Connection. 
- ELECTRICAL:**
- Cord only included,
  - Electrical connection is 220V / 3ph / 60Hz.





# 3 UNDERCOUNTERS



# UNDERCOUNTERS




UC-MR67

Refrigeration air flow

AISI 430 Stainless Steel  
Interior & Exterior cabinet construction.  
AISI 304 Stainless Steel Top

Digital controller


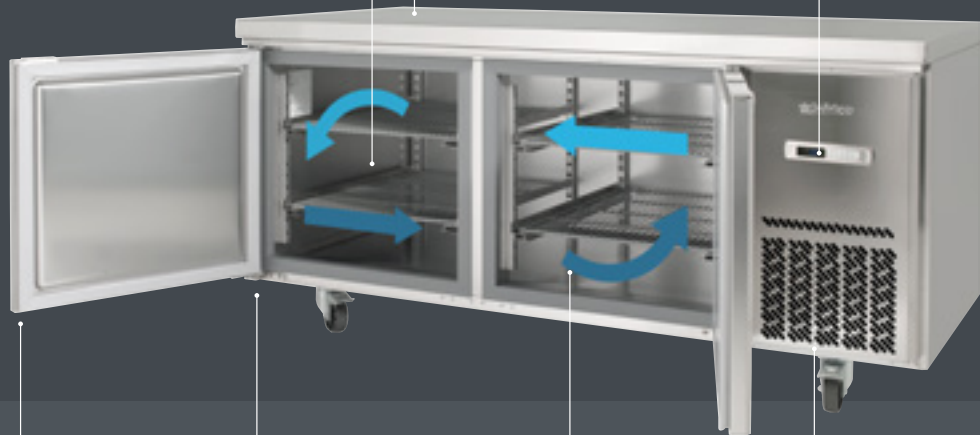


Triple chamber snap  
in door gasket for  
easy cleaning

Self-closing doors with  
stay open feature

Rounded corners &  
sealed interior floor,  
NSF7, including drain  
plug for cleaning

Extractable side  
mounted condensing  
unit for easy service



## UNDERCOUNTER REFRIGERATORS

| MODELS    | DESCRIPTION                                     | PAGE |
|-----------|---|------|
| IUC-UC27R | 1 Solid Door Refrigerator - 8 ft <sup>3</sup>   | 40   |
| IUC-UC48R | 2 Solid Doors Refrigerator - 14 ft <sup>3</sup> | 40   |
| IUC-UC60R | 3 Solid Doors Refrigerator - 17 ft <sup>3</sup> | 40   |
| IUC-UC72R | 4 Solid Doors Refrigerator - 21 ft <sup>3</sup> | 40   |

## UNDERCOUNTER FREEZERS

| MODELS    | DESCRIPTION                                | PAGE |
|-----------|--|------|
| IUC-UC27F | 1 Solid Door Freezer - 8 ft <sup>3</sup>   | 42   |
| IUC-UC48F | 2 Solid Doors Freezer - 14 ft <sup>3</sup> | 42   |
| IUC-UC60F | 3 Solid Doors Freezer - 17 ft <sup>3</sup> | 42   |

## DEEP UNDERCOUNTERS REFRIGERATORS

| MODELS   | DESCRIPTION                                     | PAGE |
|----------|---|------|
| IUC-MR41 | 1 Solid Door Refrigerator - 8 ft <sup>3</sup>   | 44   |
| IUC-MR67 | 2 Solid Doors Refrigerator - 18 ft <sup>3</sup> | 44   |
| IUC-MR93 | 3 Solid Doors Refrigerator - 28 ft <sup>3</sup> | 44   |

## DEEP UNDERCOUNTERS FREEZERS

| MODELS     | DESCRIPTION                                | PAGE |
|------------|--|------|
| IUC-MR41BT | 1 Solid Door Freezer - 8 ft <sup>3</sup>   | 46   |
| IUC-MR67BT | 2 Solid Doors Freezer - 18 ft <sup>3</sup> | 46   |

UNDERCOUNTERS

**UNDERCOUNTERS  
REFRIGERATORS**



IUC-UC27R



IUC-UC60R



IUC-UC48R



IUC-UC72R

| MODELS           | →                  | ↗      | ↑      | 🚪     | 🌡️        | 📦                  | ⚙️   | ⚡              | 📏     | 💰              |
|------------------|--------------------|--------|--------|-------|-----------|--------------------|------|----------------|-------|----------------|
|                  | Overall Dimensions |        |        | Doors | (°F)      | (ft <sup>3</sup> ) | (HP) | (Amps)<br>115V | (Lbs) | (\$)           |
| <b>IUC-UC27R</b> | 27-5/8             | 30-1/8 | 35-3/4 | 1     | 33°F/38°F | 8.0                | 1/5  | 3.9            | 202   | <b>\$3,900</b> |
| <b>IUC-UC48R</b> | 48-1/8             | 30-1/8 | 35-3/4 | 2     | 33°F/38°F | 14.0               | 1/4  | 5.5            | 354   | <b>\$4,900</b> |
| <b>IUC-UC60R</b> | 60-3/8             | 30-1/8 | 35-3/4 | 2     | 33°F/38°F | 17.0               | 1/4  | 5.5            | 430   | <b>\$5,200</b> |
| <b>IUC-UC72R</b> | 72-5/8             | 30-1/8 | 35-3/4 | 3     | 33°F/38°F | 21.0               | 3/8  | 5.7            | 506   | <b>\$6,000</b> |

Height does already include 5-1/8" for casters

ETL LISTED TO UL471 standard and sanitation classified to NSF / We reserve the right to change specifications without prior notice

# UNDERCOUNTERS REFRIGERATORS

## STANDARD FEATURES



IUC-UC272D

Optional drawer kit  
Compatible with:  
12"x20" [UC27/UC60] pans  
1/2+1/3 [UC48] pans  
[Pans not included]

**EXTERIOR:** - AISI 430 stainless steel  
- AISI 304 stainless steel top

**INTERIOR:** - AISI 430 stainless steel

**INSULATION:** - CFC-Free polyurethane insulation, entire cabinet structure is foamed-in place using a high density polyurethane insulation,  
- Low GWP & Zero ODP effect.

**DOORS:** - Polyurethane insulated doors,  
- Self closing doors with stay open feature,  
- Stainless Steel heavy-duty hinges,  
- Triple chamber snap in door gaskets for easy removal and cleaning,  
- Field reversible doors,  
- Door opening WxH: 23-1/4"x21-7/8" [UC27R];  
19-5/8"x21-7/8" [UC48R/UC72R]; 25-5/8"x21-7/8" [UC60R].

**SHELVING:** - [2] Two plastic coated wire shelves per section.

**REFRIGERATION:** - Temperature regulated by thermostatic control,  
- Energy-saving non-electric condensate pan,  
- Evaporator coil coated with anti-corrosion material 100% Polyester,  
- Forced air refrigeration system,  
- Refrigerant gas R134a.

**ELECTRICAL:** - Cord and NEMA 5-15P plug,  
- Electrical connection is 115V / 1ph / 60Hz.

**OPTIONS:** - Drawer kit,  
- Single Overshelf,  
- Double Overshelf,  
- 4" Backsplash,  
- Set of 2" casters [locking on front set].

Please, Consult the prices and codes in section accessories.

UNDERCOUNTERS

**UNDERCOUNTERS  
FREEZERS**



IUC-UC27F



IUC-UC60F

ETL LISTED TO UL471 standard and sanitation classified to NSF / We reserve the right to change specifications without prior notice

| MODELS           | →                  | ↗      | ↑      | 📱     | 🌡️   | 📦     | 🔧    | ⚠️             | 📏     | 💰              |
|------------------|--------------------|--------|--------|-------|------|-------|------|----------------|-------|----------------|
|                  | Overall Dimensions |        |        | Doors | (°F) | (ft²) | (HP) | (Amps)<br>115V | (Lbs) | (\$)           |
| <b>IUC-UC27F</b> | 27-5/8             | 30-1/8 | 35-3/4 | 1     | 0°F  | 8.0   | 1/4  | 6.4            | 202   | <b>\$4,700</b> |
| <b>IUC-UC48F</b> | 48-1/8             | 30-1/8 | 35-3/4 | 2     | 0°F  | 14.0  | 3/8  | 8.5            | 354   | <b>\$6,000</b> |
| <b>IUC-UC60F</b> | 60-3/8             | 30-1/8 | 35-3/4 | 2     | 0°F  | 17.0  | 1/2  | 11.0           | 430   | <b>\$6,800</b> |

Height does already include 5-1/8" for casters

# UNDERCOUNTERS FREEZERS

## STANDARD FEATURES



IUC-UC48F

**EXTERIOR:** - AISI 430 stainless steel  
- AISI 304 stainless steel top

**INTERIOR:** - AISI 430 stainless steel

**INSULATION:** - CFC-Free polyurethane insulation, entire cabinet structure is foamed-in place using a high density polyurethane insulation, - Low GWP & Zero ODP effect.

**DOORS:** - Polyurethane insulated doors,  
- Self closing doors with stay open feature,  
- Stainless Steel heavy-duty hinges,  
- Triple chamber snap in door gaskets for easy removal and cleaning,  
- Heated door frame to avoid accumulation of ice,  
- Field reversible doors,  
- Door opening WxH: 23-1/4"x21-7/8" [UC27F];  
19-5/8"x21-7/8" [UC48F]; 25-5/8"x21-7/8" [UC60F].

**SHELVING:** - [2] Two plastic coated wire shelves per section.

**REFRIGERATION:** - Temperature regulated by thermostatic control,  
- Hot gas defrost,  
- Energy-saving non-electric condensate pan,  
- Evaporator coil coated with anti-corrosion material 100% Polyester,  
- Forced air refrigeration system,  
- Refrigerant gas R404A.

**ELECTRICAL:** - Cord and NEMA 5-20P plug,  
- Electrical connection is 115V / 1ph / 60Hz.

**OPTIONS:** - Single Overshelf,  
- Double Overshelf,  
- 4" Backsplash,  
- Set of 2" casters.

Please, Consult the prices and codes in section accessories.

UNDERCOUNTERS

**DEEP UNDERCOUNTERS  
REFRIGERATORS**



IUC-MR41



IUC-MR67

ETL LISTED TO UL471 standard and sanitation classified to NSF / We reserve the right to change specifications without prior notice

| MODELS          | →                  | ↗      | ↑      | 📱     | 🌡️          | 📦                  | 🔧    | ⚡              | 📏     | 💰              |
|-----------------|--------------------|--------|--------|-------|-------------|--------------------|------|----------------|-------|----------------|
|                 | Overall Dimensions |        |        | Doors | (°F)        | (ft <sup>2</sup> ) | (HP) | (Amps)<br>115V | (Lbs) | (\$)           |
| <b>IUC-MR41</b> | 41-3/8             | 32-5/8 | 33-1/8 | 1     | 33°F / 38°F | 7.8                | 1/3  | 5.9            | 362   | <b>\$5,000</b> |
| <b>IUC-MR67</b> | 67-3/8             | 32-5/8 | 33-1/8 | 2     | 33°F / 38°F | 17.0               | 3/8  | 7.1            | 463   | <b>\$6,200</b> |
| <b>IUC-MR93</b> | 93-1/4             | 32-5/8 | 33-1/8 | 3     | 33°F / 38°F | 27.0               | 1/2  | 7.7            | 563   | <b>\$7,300</b> |

Height does already include 5-1/8" for casters

# DEEP UNDERCOUNTERS REFRIGERATORS

## STANDARD FEATURES



IUC-MR67



Slide out condensing unit for easy service

**EXTERIOR:** - AISI 430 stainless steel  
- AISI 304 stainless steel top

**INTERIOR:** - AISI 430 stainless steel  
- Internal drain plug for easy cleaning,  
- Sealed interior floors and rounded cabinet corners.

**INSULATION:** - CFC-Free polyurethane insulation, entire cabinet structure is foamed-in place using a high density polyurethane insulation,  
- Low GWP & Zero ODP effect.

**DOORS:** - Polyurethane insulated doors,  
- Self closing doors with stay open feature,  
- Stainless Steel heavy-duty hinges,  
- Triple chamber snap in door gaskets for easy removal and cleaning,  
- Field reversible doors,  
- Doors locks,  
- Door opening WxH: 21-5/8" x 20-5/8".

**SHELVING:** - (2) Two plastic coated wire shelves per section,  
- Compatible with 18"x26" pans.

**REFRIGERATION:** - Digital temperature controller with automatic defrost system,  
- Energy-saving non-electric condensate pan,  
- Slide out condensing unit for easy service,  
- Evaporator coil coated with anti-corrosion material 100% Polyester,  
- Forced air refrigeration system,  
- Refrigerant gas R134a.

**ELECTRICAL:** - Cord and NEMA 5-15P plug,  
- Electrical connection is 115V / 1ph / 60Hz.

**OPTIONS:** - Stainless Steel wire shelves,  
- Additional slide kits,  
- Drawer kit,  
- Single Overshelf,  
- Double Overshelf,  
- 4" Backsplash.

Please, Consult the prices and codes in section accessories.

UNDERCOUNTERS

**DEEP UNDERCOUNTERS  
FREEZERS**

ETL LISTED TO UL471 standard and sanitation classified to NSF / We reserve the right to change specifications without prior notice



IUC-MR41BT



IUC-MR67BT

| MODELS            | →                  | ↗      | ↑      | 📱     | 🌡️   | 📦     | ⚙️   | ⚠️             | 📏     | 💰              |
|-------------------|--------------------|--------|--------|-------|------|-------|------|----------------|-------|----------------|
|                   | Overall Dimensions |        |        | Doors | (°F) | (ft³) | (HP) | (Amps)<br>115V | (Lbs) | (\$)           |
| <b>IUC-MR41BT</b> | 41-3/8             | 32-5/8 | 33-1/8 | 1     | 0°F  | 7.8   | 3/8  | 8.1            | 362   | <b>\$7,200</b> |
| <b>IUC-MR67BT</b> | 67-3/8             | 32-5/8 | 33-1/8 | 2     | 0°F  | 17.0  | 5/8  | 10.0           | 463   | <b>\$8,200</b> |

Height does already include 5-1/8" for casters

## DEEP UNDERCOUNTERS FREEZERS

Intermountain food equipment facilities - Salt Lake City



IRR-AGN602MX

IUC-MR41BT

### STANDARD FEATURES

- EXTERIOR:** - AISI 430 stainless steel  
- AISI 304 stainless steel top
- INTERIOR:** - AISI 430 stainless steel  
- Internal drain plug for easy cleaning,  
- Sealed interior floors and rounded cabinet corners.
- INSULATION:** - CFC-Free polyurethane insulation, entire cabinet structure is foamed-in place using a high density polyurethane insulation,  
- Low GWP & Zero ODP effect.
- DOORS:** - Polyurethane insulated doors,  
- Self closing doors with stay open feature,  
- Stainless Steel heavy-duty hinges,  
- Triple chamber snap in door gaskets for easy removal and cleaning,  
- Heated door frame to avoid accumulation of ice,  
- Field reversible doors,  
- Doors locks,  
- Door opening WxH: 21-5/8" x 20-5/8".
- SHELVING:** - {2} Two plastic coated wire shelves per section.
- REFRIGERATION:** - Digital temperature controller with automatic defrost system,  
- Hot gas defrost,  
- Energy-saving non-electric condensate pan,  
- Extractable condensing unit for easy service,  
- Evaporator coil coated with anti-corrosion material 100% Polyester,  
- Forced air refrigeration system,  
- Refrigerant gas R404A.
- ELECTRICAL:** - Cord and NEMA 5-20P plug,  
- Electrical connection is 115V / 1ph / 60Hz.
- OPTIONS:** - Stainless Steel wire shelves,  
- Drawer kit,  
- Single Overshelf,  
- Double Overshelf,  
- 4" Backsplash.

Please, Consult the prices and codes in section accessories.



# 4 FOOD PREP TABLES



# PIZZA PREP TABLES



AISI 430 Stainless Steel Interior & Exterior cabinet construction. AISI 304 Stainless Steel Top

Insulated lid

Top includes 1/3 size polycarbonate food pans with pan dividers included

18" Deep removable cutting board made of polyethylene.

(2) Plastic-coated shelves per section, with stainless steel universal tray slides included. Optional: Stainless Steel shelves

Self-closing doors with stay open feature

Digital Controller, with automatic Defrost

Rounded corners & sealed interior floor, NSF7, including drain plug for cleaning

4" Diameter Casters with Locks on front set

Extractable side mounted condensing unit for easy service

Triple chamber snap in door gasket for easy cleaning



## SANDWICH / SALAD PREP TABLES

| MODELS    | DESCRIPTION   | PAGE |
|-----------|---|------|
| IRT-UC27P | 1 Solid Door Refrigerator - 6 pans - 8 ft <sup>3</sup>    | 50   |
| IRT-UC48P | 2 Solid Doors Refrigerator - 12 pans - 14 ft <sup>3</sup> | 50   |
| IRT-UC60P | 3 Solid Doors Refrigerator - 16 pans - 17 ft <sup>3</sup> | 50   |
| IRT-UC72P | 4 Solid Doors Refrigerator - 18 pans - 21 ft <sup>3</sup> | 50   |

## SANDWICH / SALAD PREP TABLES - MEGATOP

| MODELS      | DESCRIPTION   | PAGE |
|-------------|---|------|
| IRT-UC27PMT | 1 Solid Door Refrigerator - 9 pans - Megatop - 8 ft <sup>3</sup>    | 52   |
| IRT-UC48PMT | 2 Solid Doors Refrigerator - 18 pans - Megatop - 14 ft <sup>3</sup> | 52   |
| IRT-UC60PMT | 3 Solid Doors Refrigerator - 24 pans - Megatop - 17 ft <sup>3</sup> | 52   |
| IRT-UC72PMT | 4 Solid Doors Refrigerator - 27 pans - Megatop - 21 ft <sup>3</sup> | 52   |

## PIZZA PREP TABLES

| MODELS      | DESCRIPTION   | PAGE |
|-------------|---|------|
| IRT-MR41EN  | 1 Solid Door Refrigerator - 5 pans - 8 ft <sup>3</sup>    | 54   |
| IRT-MR67EN  | 2 Solid Doors Refrigerator - 9 pans - 17 ft <sup>3</sup>  | 54   |
| IRT-MR93EN  | 3 Solid Doors Refrigerator - 13 pans - 27 ft <sup>3</sup> | 54   |
| IRT-MR119EN | 4 Solid Doors Refrigerator - 16 pans - 39 ft <sup>3</sup> | 54   |

## GRANITE TOP PIZZA PREP TABLES

| MODELS      | DESCRIPTION  | PAGE |
|-------------|--|------|
| IRT-MPG1490 | 2 Solid Doors Refrigerator - 5 pans - 10.4 ft <sup>3</sup> | 56   |
| IRT-MPG1980 | 3 Solid Doors Refrigerator - 8 pans - 16.2 ft <sup>3</sup> | 56   |

FOOD PREP TABLES

# SANDWICH SALAD PREP TABLES



IRT-UC27P







IRT-UC48P



IRT-UC60P



IRT-UC72P



ETL LISTED TO UL471 standard and sanitation classified to NSF / We reserve the right to change specifications without prior notice

| MODELS           | →                  | ↗      | ↑      | 🚪     | 🌡️        | 📏     | ⚙️   | ⚠️             | 📖     | 💰              |
|------------------|--------------------|--------|--------|-------|-----------|-------|------|----------------|-------|----------------|
|                  | Overall Dimensions |        |        | Doors | (°F)      | (ft³) | (HP) | (Amps)<br>115V | (Lbs) | (\$)           |
| <b>IRT-UC27P</b> | 27-5/8             | 30-1/8 | 46-1/4 | 1     | 35°F/41°F | 8.0   | 1/5  | 3.9            | 202   | <b>\$4,200</b> |
| <b>IRT-UC48P</b> | 48-1/8             | 30-1/8 | 46-1/4 | 2     | 35°F/41°F | 14.0  | 1/4  | 5.5            | 354   | <b>\$5,500</b> |
| <b>IRT-UC60P</b> | 60-3/8             | 30-1/8 | 46-1/4 | 2     | 35°F/41°F | 17.0  | 1/4  | 5.5            | 430   | <b>\$6,100</b> |
| <b>IRT-UC72P</b> | 72-5/8             | 30-1/8 | 46-1/4 | 3     | 35°F/41°F | 21.0  | 3/8  | 5.7            | 506   | <b>\$7,000</b> |

Height does already include 5-1/8" for casters

# SANDWICH SALAD PREP TABLES

## STANDARD FEATURES



**EXTERIOR:** - AISI 430 stainless steel  
- AISI 304 stainless steel top

**INTERIOR:** - AISI 430 stainless steel

**INSULATION:** - CFC-Free polyurethane insulation, entire cabinet structure is foamed-in place using a high density polyurethane insulation, - Low GWP & Zero ODP effect.

**DOORS:** - Polyurethane insulated doors,  
- Self closing doors with stay open feature,  
- Stainless Steel heavy-duty hinges,  
- Triple chamber snap in door gaskets for easy removal and cleaning,  
- Field reversible doors,  
- Door opening WxH: 23-1/4"x21-7/8" [UC27P];  
19-5/8"x21-7/8" [UC48P/UC72P]; 25-5/8"x21-7/8" [UC60P].

**SALAD TOP:** - Stainless steel insulated lid,  
- Top includes 1/6 size polycarbonate food pans [UC27P = 6 pans; UC48P = 12 pans; UC60P = 16 pans; UC72P = 18 pans],  
- Pan divider bars included for varying size pan configurations,  
- Removable sanitary polyethylene cutting board included.

**SHELVING:** - [2] Two plastic coated wire shelves per section.

**REFRIGERATION:** - Temperature regulated by thermostatic control,  
- Energy-saving non-electric condensate pan,  
- Evaporator coil coated with anti-corrosion material 100% Polyester,  
- Forced air refrigeration system,  
- Refrigerant gas R134a.

**ELECTRICAL:** - Cord and NEMA 5-15P plug,  
- Electrical connection is 115V / 1ph / 60Hz.

**OPTIONS:** - Drawer kit,  
- Flat lid,  
- Single overshelf,  
- Double overshelf,  
- Set of 2" casters [locking on the front set].

Please, Consult the prices and codes in section accessories.

FOOD PREP TABLES

# SANDWICH SALAD PREP TABLES - MEGATOP




ETL LISTED TO UL471 standard and sanitation classified to NSF / We reserve the right to change specifications without prior notice



IRT-UC27PMT



IRT-UC60PMT



| MODELS             | Overall Dimensions |        | ↑  | 🚪     | 🌡️        | 📦                  | ⚙️   | ⚡              | 📏     | 💰              |
|--------------------|--------------------|--------|----|-------|-----------|--------------------|------|----------------|-------|----------------|
|                    | →                  | ↗️     | ↑  | Doors | (°F)      | (ft <sup>2</sup> ) | (HP) | (Amps)<br>115V | (Lbs) | [\$]           |
| <b>IRT-UC27PMT</b> | 27-5/8             | 34-1/8 | 49 | 1     | 35°F/41°F | 8.0                | 1/5  | 3.9            | 202   | <b>\$4,700</b> |
| <b>IRT-UC48PMT</b> | 48-1/8             | 34-1/8 | 49 | 2     | 35°F/41°F | 14.0               | 1/4  | 5.5            | 354   | <b>\$6,200</b> |
| <b>IRT-UC60PMT</b> | 60-3/8             | 34-1/8 | 49 | 2     | 35°F/41°F | 17.0               | 1/4  | 5.5            | 430   | <b>\$6,800</b> |
| <b>IRT-UC72PMT</b> | 72-5/8             | 34-1/8 | 49 | 3     | 35°F/41°F | 21.0               | 3/8  | 5.7            | 506   | <b>\$7,800</b> |

Height does already include 5-1/8" for casters

# SANDWICH SALAD PREP TABLES - MEGATOP



IRT-UC72PMT

## STANDARD FEATURES

**EXTERIOR:** - AISI 430 stainless steel  
- AISI 304 stainless steel top

**INTERIOR:** - AISI 430 stainless steel

**INSULATION:** - CFC-Free polyurethane insulation, entire cabinet structure is foamed-in place using a high density polyurethane insulation,  
- Low GWP & Zero ODP effect.

**DOORS:** - Polyurethane insulated doors,  
- Self closing doors with stay open feature,  
- Stainless Steel heavy-duty hinges,  
- Triple chamber snap in door gaskets for easy removal and cleaning,  
- Field reversible doors,  
- Door opening WxH: 23-1/4"x21-7/8" (UC27PMT);  
19-5/8"x21-7/8" (UC48PMT/UC72PMT);  
25-5/8"x21-7/8" (UC60PMT).

**SALAD TOP:** - Stainless steel insulated lid,  
- Top includes 1/6 size polycarbonate food pans (UC27PMT = 9 pans;  
UC48PMT = 18 pans; UC60PMT = 24 pans; UC72PMT = 27 pans),  
- Pan divider bars included for varying size pan configurations,  
- Removable sanitary polyethylene cutting board included.

**SHELVING:** - [2] Two plastic coated wire shelves per section.

**REFRIGERATION:** - Temperature regulated by thermostatic control,  
- Energy-saving non-electric condensate pan,  
- Evaporator coil coated with anti-corrosion material 100% Polyester,  
- Forced air refrigeration system,  
- Refrigerant gas R134a.

**ELECTRICAL:** - Cord and NEMA 5-15P plug,  
- Electrical connection is 115V / 1ph / 60Hz.

**OPTIONS:** - Flat lid,  
- Single overshef,  
- Double overshef,  
- Set of 2" casters.

Please, Consult the prices and codes in section accessories.

FOOD PREP TABLES

PIZZA PREP TABLES

ETL LISTED TO UL471 standard and sanitation classified to NSF / We reserve the right to change specifications without prior notice



IRT-MR41EN



IRT-MR93EN



IRT-MR119EN



Extraible shelf



Two opening position linge



18" Work deep

| MODELS      | →                  | ↗      | ↑      | 🚪     | 🌡️        | 📏                  | ⚙️   | ⚡              | 📏     | 💰        |
|-------------|--------------------|--------|--------|-------|-----------|--------------------|------|----------------|-------|----------|
|             | Overall Dimensions |        |        | Doors | (°F)      | (ft <sup>2</sup> ) | (HP) | (Amps)<br>115V | (Lbs) | (\$)     |
| IRT-MR41EN  | 41-3/8             | 32-5/8 | 40-1/4 | 1/1   | 35°F/41°F | 7.8                | 1/3  | 5.9            | 362   | \$6,400  |
| IRT-MR67EN  | 67-3/8             | 32-5/8 | 40-1/4 | 2/2   | 35°F/41°F | 17.0               | 3/8  | 7.1            | 463   | \$7,800  |
| IRT-MR93EN  | 93-1/4             | 32-5/8 | 40-1/4 | 3/2   | 35°F/41°F | 27.0               | 1/2  | 7.7            | 563   | \$9,200  |
| IRT-MR119EN | 119-1/4            | 32-5/8 | 40-1/4 | 4/3   | 35°F/41°F | 39.0               | 5/8  | 8.9            | 640   | \$15,400 |

Height does already include 5-1/8" for casters



Extractable condensing unit for easy service

## PIZZA PREP TABLES



### STANDARD FEATURES

- EXTERIOR:** - AISI 430 stainless steel  
- AISI 304 stainless steel top
- INTERIOR:** - AISI 430 stainless steel  
- Internal drain plug for easy cleaning.  
- Sealed interior floors and rounded cabinet corners
- INSULATION:** - CFC-Free polyurethane insulation, entire cabinet structure is foamed-in place using a high density polyurethane insulation,  
- Low GWP & Zero ODP effect.
- DOORS:** - Polyurethane insulated doors,  
- Self closing doors with stay open feature,  
- Stainless Steel heavy-duty hinges,  
- Triple chamber snap in door gaskets for easy removal and cleaning,  
- Field reversible doors,  
- Doors locks,  
- Door opening WxH: 21-5/8" x 20-5/8".
- SALAD TOP:** - Stainless steel insulated lid,  
- Top includes 1/3 size polycarbonate food pans (MR41EN = 5 pans; MR67EN = 9 pans; MR93EN = 12 pans; MR119EN = 16 pans),  
- Pan divider bars included,  
- Removable sanitary polyethylene cutting board included.
- SHELVING:** - (2) Two plastic coated wire shelves per section with stainless steel tray slides included,  
- Compatible with 18"x26" pans.
- REFRIGERATION:** - Digital temperature controller with automatic defrost system,  
- Energy-saving non-electric condensate pan,  
- Extractable condensing unit for easy service,  
- Evaporator coil coated with anti-corrosion material 100% Polyester,  
- Forced air refrigeration system,  
- Refrigerant gas R134a.
- ELECTRICAL:** - Cord and NEMA 5-15P plug,  
- Electrical connection is 115V / 1ph / 60Hz.
- OPTIONS:** - Stainless Steel wire shelves,  
- Additional slide kits,  
- Drawer kit,  
- Single overshelf,  
- Double overshelf,

Please, Consult the prices and codes in section accessories.

IRT-MR67EN

FOOD PREP TABLES

# GRANITE TOP PIZZA PREP TABLES



IRT-MPG1490



IRT-MPG1980

| MODELS             | →                  | ↗      | ↑      | 🚪     | 🌡️                     | 📏            | ⚙️         | ⚡              | 📦     | 💰               |
|--------------------|--------------------|--------|--------|-------|------------------------|--------------|------------|----------------|-------|-----------------|
|                    | Overall Dimensions |        |        | Doors | (°F)                   | (ft²)        | (HP)       | (Amps)<br>115V | (Lbs) | (\$)            |
| <b>IRT-MPG1490</b> | 58-5/8             | 27-1/2 | 55-3/8 | 2     | 33°F/38°F<br>39°F/41°F | 10.4<br>1.83 | 1/4<br>1/6 | 6.1<br>1.82    | 500   | <b>\$10,200</b> |
| <b>IRT-MPG1980</b> | 78                 | 27-1/2 | 55-3/8 | 3     | 33°F/38°F<br>39°F/41°F | 16.2<br>2.36 | 1/4<br>1/6 | 6.5<br>1.82    | 626   | <b>\$12,500</b> |

Height does already include 5-1/8" for casters

ETL LISTED TO UL471 standard and sanitation classified to NSF / We reserve the right to change specifications without prior notice

## GRANITE TOP PIZZA PREP TABLES



### STANDARD FEATURES

**EXTERIOR:** - Granite worktop  
- AISI 304 stainless steel

**INTERIOR:** - AISI 304 stainless steel  
- Internal drain plug for easy cleaning.  
- Sealed interior floors and rounded cabinet corners

**INSULATION:** - CFC-Free polyurethane insulation, entire cabinet structure is foamed-in place using a high density polyurethane insulation,  
- Low GWP & Zero ODP effect.

**DOORS:** - Polyurethane insulated doors,  
- Self closing doors with stay open feature,  
- Stainless Steel heavy-duty hinges,  
- Triple chamber snap in door gaskets for easy removal and cleaning,  
- Field reversible doors,  
- Doors locks,  
- Door opening WxH: 14-3/4" x 20-5/8".


**SHELVING:** - [1] One plastic coated wire shelves per door with stainless steel tray slides included,  
- Compatible with 12"x20" pans.

**REFRIGERATION:** - Digital temperature controller with automatic defrost system,  
- Extractable condensing unit for easy service,  
- Evaporator coil coated with anti-corrosion material 100% Polyester,  
- Drain pan with condensate heater,  
- Front-breathing refrigeration system,  
- Refrigeration system independent for table and counter-top ingredient,  
- Refrigerant gas R134a.

**ELECTRICAL:** - Cord and NEMA 5-15P plug,  
- Electrical connection is 115V / 1ph / 60Hz.

**OPTIONS:** - Stainless Steel wire shelves,  
- Additional slide kits,

Please, Consult the prices and codes in section accessories.





PLEASE CONSULT  
FOR LEAD TIME



# 5 CHEF BASES



# CHEF BASES

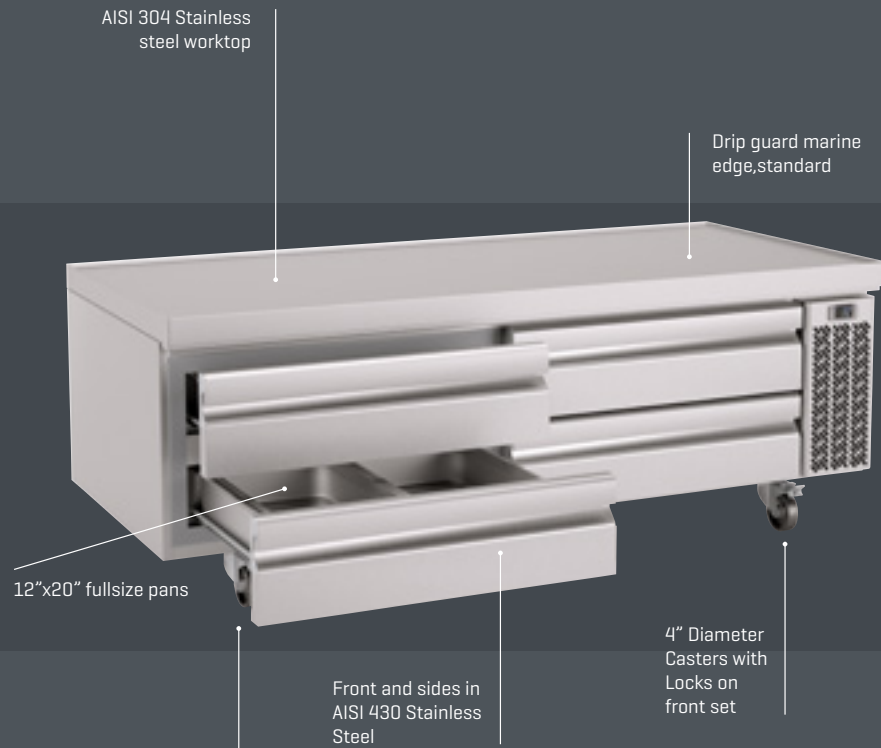

Heavy-duty stainless steel drawer slides designed to hold up to 440 Lbs

## CHEF BASES

| MODELS            | DESCRIPTION   | PAGE |
|-------------------|---|------|
| <b>IUC-MSG36</b>  | Chef Bases - 2 Drawers - 2 (12x20") & 6 (1/6") Pans | 60   |
| <b>IUC-MSG48</b>  | Chef Bases - 2 Drawers - 4 Pans                     | 60   |
| <b>IUC-MSG52</b>  | Chef Bases - 2 Drawers - 6 Pans                     | 60   |
| <b>IUC-MSG72</b>  | Chef Bases - 4 Drawers - 8 Pans                     | 60   |
| <b>IUC-MSG96</b>  | Chef Bases - 4 Drawers - 12 Pans                    | 60   |
| <b>IUC-MSG110</b> | Chef Bases - 6 Drawers - 12 Pans                    | 60   |

CHEF BASES

# CHEF BASES



IUC-MSG96



IUC-MSG48



IUC-MSG52

| MODELS            | →                  | ↗      | ↑      | 📱     | 🌡️        | 📦                  | ⚙️   | ⚠️             | 📏     | 💰               |
|-------------------|--------------------|--------|--------|-------|-----------|--------------------|------|----------------|-------|-----------------|
|                   | Overall Dimensions |        |        | Doors | (°F)      | (ft <sup>2</sup> ) | (HP) | (Amps)<br>115V | (Lbs) | (\$)            |
| <b>IUC-MSG36</b>  | 36-5/8             | 32-1/2 | 26-1/4 | 2     | 33°F/38°F | 5.2                | 1/5  | 4.8            | 230   | <b>\$7,000</b>  |
| <b>IUC-MSG48</b>  | 48-5/8             | 32-1/2 | 26-1/4 | 2     | 33°F/38°F | 6.8                | 1/5  | 4.8            | 280   | <b>\$8,000</b>  |
| <b>IUC-MSG52</b>  | 53-1/4             | 32-1/2 | 26-1/4 | 2     | 33°F/38°F | 9.9                | 1/3  | 6.5            | 330   | <b>\$8,500</b>  |
| <b>IUC-MSG72</b>  | 72-5/8             | 32-1/2 | 26-1/4 | 4     | 33°F/38°F | 14.3               | 1/3  | 6.7            | 440   | <b>\$10,400</b> |
| <b>IUC-MSG96</b>  | 97                 | 32-1/2 | 26-1/4 | 4     | 33°F/38°F | 20.6               | 1/3  | 6.7            | 507   | <b>\$12,400</b> |
| <b>IUC-MSG110</b> | 110-5/8            | 32-1/2 | 26-1/4 | 6     | 33°F/38°F | 22                 | 1/3  | 6.9            | 510   | <b>\$14,500</b> |

Height does already include 5-1/8" for casters

ETL LISTED TO UL471 standard and sanitation classified to NSF / We reserve the right to change specifications without prior notice

# CHEF BASES

## STANDARD FEATURES



**EXTERIOR:** - AISI 304 Stainless Steel top. Drip resistant "V" edge protects against spills.  
- Front and sides in AISI 430 Stainless Steel.

**INTERIOR:** - AISI 430 stainless steel

**INSULATION:** - CFC-Free polyurethane insulation, entire cabinet structure is foamed-in place using a high density polyurethane insulation,  
- Low GWP & Zero ODP effect.

**DRAWERS:** - Each drawer accommodates two or three full size 12"x20" pans,  
- Drawers with full-extension sliding rails for complete opening,  
- Drawers with integrated handle,  
- Heavy-duty Stainless Steel drawer slides designed to hold up to 440 Lbs.

**REFRIGERATION:** - Digital temperature controller with automatic defrost system,  
- Drain pan with condensate heater,  
- Extractable condensing unit for easy service,  
- Evaporator coil coated with anti-corrosion material 100% Polyester,  
- Refrigerant gas R134a.

**ELECTRICAL:** - Cord and NEMA 5-15P plug,  
- Electrical connection is 115V / 1ph / 60Hz.

**OPTIONS:** - Set of 6" legs, height adjustable from 5" to 8".

Please, Consult the prices and codes in section accessories.

IUC-MSG72



Heavy-duty stainless steel drawer slides designed to hold up to 440 Lbs.



AISI 304 Stainless steel worktop with drip guard marine edge, standard





# 6 COOLERS & WINE CELLARS



# WINE CELLARS



|                                 |          |
|---------------------------------|----------|
| <b>2 YEARS</b><br>PARTS & LABOR | WARRANTY |
| <b>6 YEARS</b><br>COMPRESSOR    |          |

## BACK BAR COOLERS

| MODELS        | DESCRIPTION                      | PAGE |
|---------------|----------------------------------|------|
| IMD-ERV36IISD | Back bar coolers - 1 Solid door  | 64   |
| IMD-ERV60IISD | Back bar coolers - 2 Solid doors | 64   |
| IMD-ERV84IISD | Back bar coolers - 3 Solid doors | 64   |
| IMD-ERV36IIGD | Back bar coolers - 1 Glass door  | 66   |
| IMD-ERV60IIGD | Back bar coolers - 2 Glass doors | 66   |
| IMD-ERV84IIGD | Back bar coolers - 3 Glass doors | 66   |

## MILK COOLERS

| MODELS      | DESCRIPTION                                    | PAGE |
|-------------|--|------|
| IMD-IMC34SS | Single sided refrigerator - 13 ft <sup>3</sup> | 68   |
| IMD-IMC49SS | Single sided refrigerator - 19 ft <sup>3</sup> | 68   |
| IMD-IMC58SS | Single sided refrigerator - 23 ft <sup>3</sup> | 68   |
| IMD-IMC34DS | Double sided refrigerator - 13 ft <sup>3</sup> | 70   |
| IMD-IMC49DS | Double sided refrigerator - 19 ft <sup>3</sup> | 70   |
| IMD-IMC58DS | Double sided refrigerator - 23 ft <sup>3</sup> | 70   |

## WINE CELLARS

| MODELS       | DESCRIPTION   | PAGE |
|--------------|---|------|
| IMD-EVV100   | 1 Glass door refrigerator - 100 Bottles - 11.3 ft <sup>3</sup>      | 72   |
| IMD-EVV200MX | 2 Glass doors refrigerator - 100+100 Bottles - 22.6 ft <sup>3</sup> | 72   |

## RETRO REFRIGERATORS / CONFECTIONERY

| MODELS            | DESCRIPTION  | PAGE |
|-------------------|--|------|
| IMD-EVV23RETRO    | 1 Glass door refrigerator - Reach-in - 19 ft <sup>3</sup>  | 74   |
| IMD-EVV49RETRO    | 2 Glass doors refrigerator - Reach-in - 38 ft <sup>3</sup> | 74   |
| IMD-EVV494SDRETRO | 4 Solid doors refrigerator - Reach-in - 38 ft <sup>3</sup> | 74   |

COOLERS

# BACK BAR COOLERS SOLID DOORS

ETL LISTED TO UL471 standard and sanitation classified to NSF / We reserve the right to change specifications without prior notice

Removable top to fit 34" counter height



IMD-ERV36IISD



IMD-ERV60IISD



IMD-ERV84IISD

| MODELS               | →                  | ↗      | ↑      | 📱     | 🌡️        | 📦     | ⚙️   | ⚡              | 📖     | 💰              |
|----------------------|--------------------|--------|--------|-------|-----------|-------|------|----------------|-------|----------------|
|                      | Overall Dimensions |        |        | Doors | (°F)      | (ft³) | (HP) | [Amps]<br>115V | [Lbs] | (\$)           |
| <b>IMD-ERV36IISD</b> | 36-5/16            | 23-3/4 | 34-1/2 | 1     | 33°F/38°F | 5.72  | 1/5  | 3,3            | 154   | <b>\$4,200</b> |
| <b>IMD-ERV60IISD</b> | 60-3/4             | 23-3/4 | 34-1/2 | 2     | 33°F/38°F | 12.78 | 1/5  | 3,4            | 220   | <b>\$5,000</b> |
| <b>IMD-ERV84IISD</b> | 85-3/16            | 23-3/4 | 34-1/2 | 3     | 33°F/38°F | 19.85 | 1/3  | 5,2            | 330   | <b>\$6,000</b> |

## BACK BAR COOLERS SOLID DOORS

### STANDARD FEATURES

**EXTERIOR:** - AISI 430 Stainless Steel

**INTERIOR:** - AISI 430 Stainless Steel  
- Sealed interior floors.

**INSULATION:** - CFC-Free polyurethane insulation, entire cabinet structure is foamed-in place using a high density polyurethane insulation,  
- Low GWP & Zero ODP effect.

**DOORS:** - Self closing doors with stay open feature,  
- Stainless Steel heavy-duty hinges,  
- Triple chamber snap in door gaskets for easy removal and cleaning,  
- Field reversible doors,  
- Doors locks,  
- Full-height door opening: WxH= 19-5/8"x26-7/8".

**SHELVING:** - [2] Two plastic coated wire shelves per section.

**REFRIGERATION:** - Digital temperature controller with automatic defrost system,  
- Energy-saving non-electric condensate pan,  
- Evaporator coil coated with anti-corrosion material 100% Polyester,  
- Forced air refrigeration system,  
- Refrigerant gas R134a.

**ELECTRICAL:** - Cord and NEMA 5-15P plug,  
- Electrical connection is 115V / 1ph / 60Hz.

**OPTIONS:** - Set of 4" casters,  
- Set of 4" casters, front locking.



COOLERS

# BACK BAR COOLERS GLASS DOORS



IMD-ERV60IIGD



IMD-ERV84IIGD



Allows beer barrel entry

MODELS

|                      | →                  | ↗      | ↑      | 🚪     | 🌡️        | 📏                  | ⚙️   | ⚡              | 📖     | 💰              |
|----------------------|--------------------|--------|--------|-------|-----------|--------------------|------|----------------|-------|----------------|
|                      | Overall Dimensions |        |        | Doors | (°F)      | (ft <sup>3</sup> ) | (HP) | [Amps]<br>115V | [Lbs] | [\$]           |
| <b>IMD-ERV36IIGD</b> | 36-5/16            | 23-3/4 | 34-1/2 | 1     | 33°F/38°F | 5.72               | 1/5  | 3,3            | 154   | <b>\$4,600</b> |
| <b>IMD-ERV60IIGD</b> | 60-3/4             | 23-3/4 | 34-1/2 | 2     | 33°F/38°F | 12.78              | 1/5  | 3,4            | 220   | <b>\$5,900</b> |
| <b>IMD-ERV84IIGD</b> | 85-3/16            | 23-3/4 | 34-1/2 | 3     | 33°F/38°F | 19.85              | 1/3  | 5,2            | 330   | <b>\$7,000</b> |

ETL LISTED TO UL471 standard and sanitation classified to NSF / We reserve the right to change specifications without prior notice

## BACK BAR COOLERS GLASS DOORS

Removable top to fit 34" counter height



IMD-ERV36IIGD

### STANDARD FEATURES



- EXTERIOR:** - AISI 430 stainless steel  
- Levelling feet
- INTERIOR:** - AISI 430 stainless steel  
- Internal drain plug for easy cleaning.  
- LED Lighting
- INSULATION:** - CFC-Free polyurethane insulation, entire cabinet structure is foamed-in place using a high density polyurethane insulation,  
- Low GWP & Zero ODP effect.
- DOORS:** - Thermopane double glass,  
- Self closing doors with stay open feature,  
- Stainless Steel heavy-duty hinges,  
- Triple chamber snap in door gaskets for easy removal and cleaning,  
- Field reversible doors,  
- Doors locks,  
- Full-height door opening: WxH= 19-5/8"x26-7/8".
- SHELVING:** - [2] Two plastic coated wire shelves per section.
- REFRIGERATION:** - Digital temperature controller with automatic defrost system,  
- Energy-saving non-electric condensate pan,  
- Evaporator coil coated with anti-corrosion material 100% Polyester,  
- Forced air refrigeration system,  
- Refrigerant gas R134a.
- ELECTRICAL:** - Cord and NEMA 5-15P plug,  
- Electrical connection is 115V / 1ph / 60Hz.
- OPTIONS:** - Set of 4" casters,  
- Set of 4" casters, front locking.

COOLERS

# MILK COOLERS SINGLE SIDED REFRIGERATOR



IMD-IMC49SS



IMD-IMC58SS

| MODELS             | →                  | ↗      | ↑      | 🚪     | 🌡️        | 📏                  | ⚙️   | ⚡              | 📏     | 💰              |
|--------------------|--------------------|--------|--------|-------|-----------|--------------------|------|----------------|-------|----------------|
|                    | Overall Dimensions |        |        | Doors | (°F)      | (ft <sup>3</sup> ) | (HP) | [Amps]<br>115V | [Lbs] | [\$]           |
| <b>IMD-IMC34SS</b> | 34                 | 33-3/8 | 49-1/2 | 2     | 33°F/38°F | 13.0               | 1/4  | 5.5            | 276   | <b>\$4,400</b> |
| <b>IMD-IMC49SS</b> | 49                 | 33-3/8 | 49-1/2 | 2     | 33°F/38°F | 19.0               | 1/3  | 5.9            | 353   | <b>\$5,300</b> |
| <b>IMD-IMC58SS</b> | 58                 | 33-3/8 | 49-1/2 | 2     | 33°F/38°F | 23.0               | 3/8  | 7.6            | 388   | <b>\$5,600</b> |

Height does already include 5-1/8" for casters

ETL LISTED TO UL471 standard and sanitation classified to NSF / We reserve the right to change specifications without prior notice

# MILK COOLERS

## SINGLE SIDED REFRIGERATOR



IMD-IMC34SS



### STANDARD FEATURES

**EXTERIOR:** - Pre-painted steel exterior  
- AISI 304 stainless steel top

**INTERIOR:** - Pre-painted steel interior  
- AISI 304 stainless steel bottom,  
- Internal drain plug for easy cleaning.

**INSULATION:** - CFC-Free polyurethane insulation, entire cabinet structure is foamed-in place using a high density polyurethane insulation,  
- Low GWP & Zero ODP effect.

**DOORS:** - AISI 430 stainless steel,  
- Polyurethane insulated doors,  
- Triple chamber snap in door gaskets for easy removal and cleaning,  
- Integrated doors locks.

**SHELVING:** - Plastic coated wire shelves included.

**REFRIGERATION:** - Digital temperature controller with automatic defrost system,  
- Energy-saving non-electric condensate pan,  
- Evaporator coil coated with anti-corrosion material 100% Polyester,  
- Forced air refrigeration system,  
- Refrigerant gas R134a.

**ELECTRICAL:** - Cord and NEMA 5-15P plug,  
- Electrical connection is 115V / 1ph / 60Hz.

Please, Consult the prices and codes in section accessories.

COOLERS

# MILK COOLERS DUAL SIDED REFRIGERATOR



IMD-IMC34DS



IMD-IMC49DS



IMD-IMC58DS

| MODELS             | →                  | ↗      | ↑      | 🚪     | 📦               | 🌡️        | 📦     | ⚙️   | ⚠️             | 📏     | 💰              |
|--------------------|--------------------|--------|--------|-------|-----------------|-----------|-------|------|----------------|-------|----------------|
|                    | Overall Dimensions |        |        | Doors | Capacity crates | (°F)      | (ft³) | (HP) | (Amps)<br>115V | (Lbs) | (\$)           |
| <b>IMD-IMC34DS</b> | 34                 | 33-3/8 | 49-1/2 | 4     | 8               | 33°F/38°F | 13.0  | 1/4  | 5.5            | 289   | <b>\$6,000</b> |
| <b>IMD-IMC49DS</b> | 49                 | 33-3/8 | 49-1/2 | 4     | 12              | 33°F/38°F | 19.0  | 1/3  | 5.9            | 388   | <b>\$7,000</b> |
| <b>IMD-IMC58DS</b> | 58                 | 33-3/8 | 49-1/2 | 4     | 16              | 33°F/38°F | 23.0  | 3/8  | 7.6            | 404   | <b>\$7,550</b> |

Height does already include 5-1/8" for casters

ETL LISTED TO UL471 standard and sanitation classified to NSF / We reserve the right to change specifications without prior notice

## MILK COOLERS DUAL SIDED REFRIGERATOR



### STANDARD FEATURES

**EXTERIOR:** - Pre-painted steel exterior  
- AISI 304 stainless steel top

**INTERIOR:** - Pre-painted steel interior  
- AISI 304 stainless steel bottom,  
- Internal drain plug for easy cleaning.

**INSULATION:** - CFC-Free polyurethane insulation, entire cabinet structure is foamed-in place using a high density polyurethane insulation,  
- Low GWP & Zero ODP effect.

**DOORS:** - AISI 430 stainless steel,  
- Triple chamber snap in door gaskets for easy removal and cleaning,  
- Integrated doors locks,  
- Polyurethane insulated doors.

**SHELVING:** - Plastic coated wire shelves included.


**REFRIGERATION:** - Digital temperature controller with automatic defrost system,  
- Energy-saving non-electric condensate pan,  
- Evaporator coil coated with anti-corrosion material 100% Polyester,  
- Forced air refrigeration system,  
- Refrigerant gas R134a.

**ELECTRICAL:** - Cord and NEMA 5-15P plug,  
- Electrical connection is 115V / 1ph / 60Hz.

**OPTIONS:** - Customizable Product [consult for \$].

Please, Consult the prices and codes in section accessories.

# WINE CELLARS

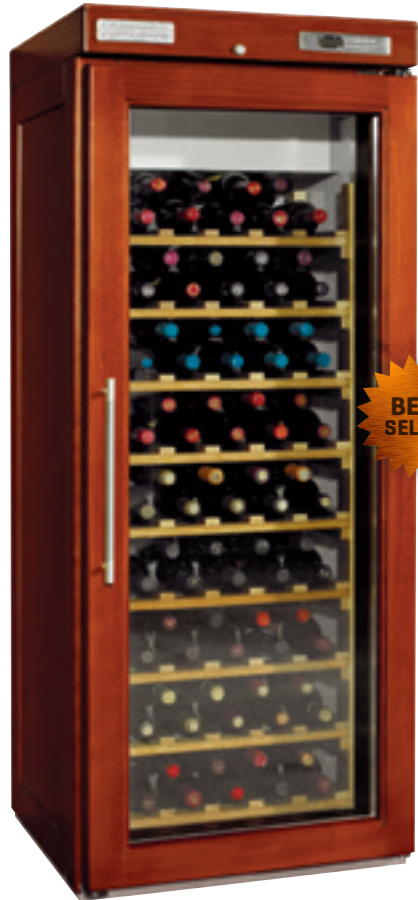

IMD-EVV100



IMD-EVV100

| MODELS              | →                  | ↗      | ↑      | 📱     | 🍷       | 🌡️        | 📏     | ⚙️      | ⚡              | 📏     | 💰               |
|---------------------|--------------------|--------|--------|-------|---------|-----------|-------|---------|----------------|-------|-----------------|
|                     | Overall Dimensions |        |        | Doors | Bottles | (°F)      | (ft³) | (HP)    | (Amps)<br>115V | (Lbs) | (\$)            |
| <b>IMD-EVV100</b>   | 26                 | 24-1/2 | 73-5/8 | 1     | 100     | 33°F/38°F | 11.3  | 1/3     | 5.9            | 290   | <b>\$7,700</b>  |
| <b>IMD-EVV200MX</b> | 52                 | 24-1/2 | 73-5/8 | 2     | 100+100 | 33°F/38°F | 22.6  | 1/3+1/3 | 11.8           | 330   | <b>\$14,900</b> |

ETL LISTED TO UL471 standard and sanitation classified to NSF / We reserve the right to change specifications without prior notice

## WINE CELLARS



### STANDARD FEATURES



LED

- EXTERIOR:** - 100% Pine wood exterior (Top, Front, Sides).
- INTERIOR:** - Pre-painted steel interior.  
- LED Lighting
- INSULATION:** - CFC-Free polyurethane insulation, entire cabinet structure is foamed-in place using a high density polyurethane insulation,  
- Low GWP & Zero ODP effect.
- DOORS:** - Built-in thermopane double glass,  
- Triple chamber snap in door gaskets for easy removal and cleaning,  
- Doors locks.
- SHELVING:** - [9] Nine wooden shelves per section (flat configuration available only).
- REFRIGERATION:** - Digital temperature controller with automatic defrost system,  
- Energy-saving non-electric condensate pan,  
- Evaporator coil coated with anti-corrosion material  
100% Polyester,  
- Forced air refrigeration system,  
- Refrigerant gas R134a,  
- Recommended temperature: Red wine, 50°F to 64°F / White, Rosé & Brut: 39°F to 46°F,  
- Split wall for dual temp configuration (MX model).
- ELECTRICAL:** - Cord and NEMA 5-15P plug,  
- Electrical connection is 115V / 1ph / 60Hz.

COOLERS

# VINTAGE REFRIGERATORS



IMD-EVV49RETRO



IMD-EVV23RETRO



PLEASE CONSULT FOR LEAD TIME

CUSTOMIZABLE PRODUCT

| MODELS                   | →                  | ↗      | ↑      | 🚪     | 🌡️        | 📦     | ⚙️   | ⚡           | 📏     | 💰               |
|--------------------------|--------------------|--------|--------|-------|-----------|-------|------|-------------|-------|-----------------|
|                          | Overall Dimensions |        |        | Doors | (°F)      | (ft³) | (HP) | (Amps) 115V | (Lbs) | (\$)            |
| <b>IMD-EVV23RETRO</b>    | 30                 | 23-3/4 | 78-3/4 | 1     | 33°F/38°F | 19.0  | 1/3  | 6.1         | 432   | <b>\$12,800</b> |
| <b>IMD-EVV49RETRO</b>    | 53-5/8             | 23-3/4 | 78-3/4 | 2     | 33°F/38°F | 38.0  | 1/3  | 6.5         | 550   | <b>\$18,500</b> |
| <b>IMD-EVV494SDRETRO</b> | 53-5/8             | 23-3/4 | 78-3/4 | 4     | 33°F/38°F | 38.0  | 1/3  | 6.5         | 550   | <b>\$16,400</b> |

ETL LISTED TO UL471 standard and sanitation classified to NSF / We reserve the right to change specifications without prior notice

## VINTAGE REFRIGERATORS




IMD-EVV494SDTETRO

### STANDARD FEATURES



- EXTERIOR:** - 100% Pine wood exterior (Top, Front, Sides).
- INTERIOR:** - AISI 304 Stainless Steel  
- Sealed interior floors and rounded cabinet corners,  
- LED Lighting (only in glass door models).
- INSULATION:** - CFC-Free polyurethane insulation, entire cabinet structure is foamed-in place using a high density polyurethane insulation,  
- Low GWP & Zero ODP effect.
- DOORS:** - Built in thermopane double glass (only glass door models),  
- Triple chamber snap in door gaskets for easy removal and cleaning,  
- Self closing doors with stay open feature.
- SHELVING:** - Reach-in: (7) Seven Stainless Steel shelves per section with stainless steel tray slides included,  
- Table: (3) Three Stainless Steel shelves per section with stainless steel tray slides included.
- REFRIGERATION:** - Digital temperature controller with automatic defrost system,  
- Drain pan with condensate heater,  
- Evaporator coil coated with anti-corrosion material  
100% Polyester,  
- Forced air refrigeration system,  
- Refrigerant gas R134a.
- ELECTRICAL:** - Cord and NEMA 5-15P plug,  
- Electrical connection is 115V / 1ph / 60Hz.
- OPTIONS:** - Optional glass doors in IMD-EVV494SDRETRO model.




PLEASE CONSULT  
FOR LEAD TIME



# 7 DISPLAY CASES



# DISPLAY CASES

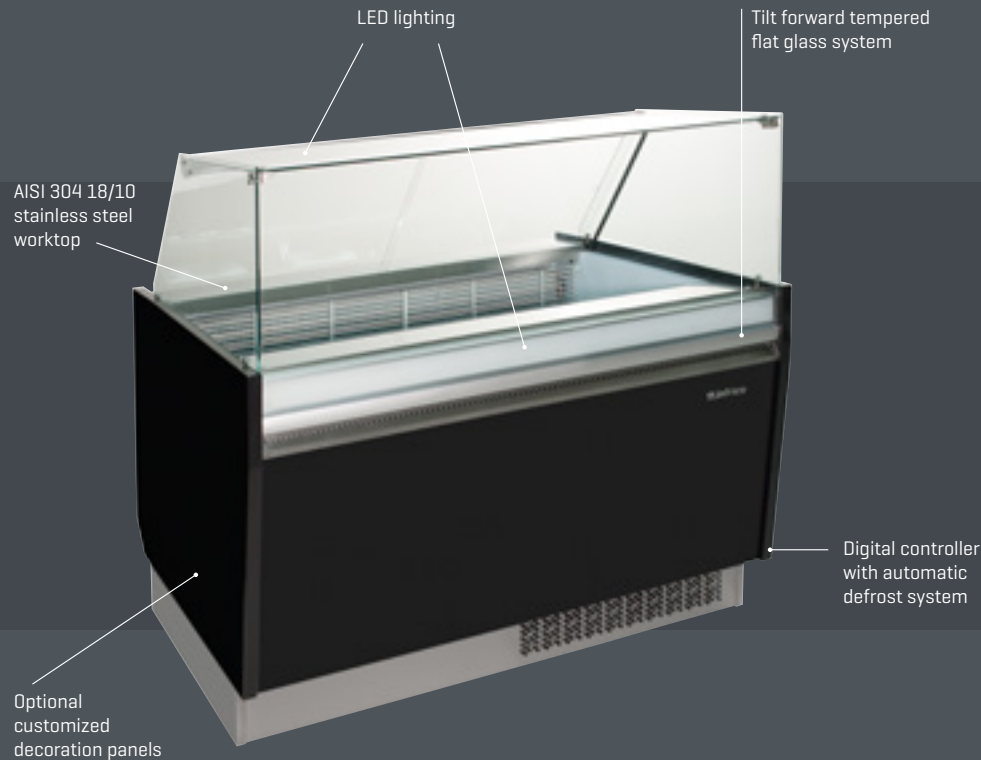

IDC-VBZ12

## DISPLAY CASES - DELI / PASTRY

| MODELS             | DESCRIPTION  | PAGE |
|--------------------|--|------|
| <b>IDC-VBR9R</b>   | Curved glass refrigerated - Width 37" - 10 ft <sup>3</sup>                     | 78   |
| <b>IDC-VBR12R</b>  | Curved glass refrigerated - Width 49-1/4" - 13 ft <sup>3</sup>                 | 78   |
| <b>IDC-VBR18R</b>  | Curved glass refrigerated - Width 73-7/8" - 20 ft <sup>3</sup>                 | 78   |
| <b>IDC-VBR9SS</b>  | Self Service glass refrigerated - Width 37" - 10 ft <sup>3</sup>               | 80   |
| <b>IDC-VBR12SS</b> | Self Service glass refrigerated - Width 49-1/4" - 13 ft <sup>3</sup>           | 80   |
| <b>IDC-VBR18SS</b> | Self Service glass refrigerated - Width 73-7/8" - 20 ft <sup>3</sup>           | 80   |
| <b>IDC-VBR9FG</b>  | Stainless Steel - Flat glass refrigerated - Width 37" - 10 ft <sup>3</sup>     | 82   |
| <b>IDC-VBR12FG</b> | Stainless Steel - Flat glass refrigerated - Width 49-1/4" - 13 ft <sup>3</sup> | 82   |
| <b>IDC-VBR18FG</b> | Stainless Steel - Flat glass refrigerated - Width 73-7/8" - 20 ft <sup>3</sup> | 82   |

## GELATO CASES

| MODELS               | DESCRIPTION  | PAGE |
|----------------------|--|------|
| <b>IDC-VAR12H</b>    | Gelato curved glass - Width 49-1/4" - 9.5 ft <sup>3</sup>  | 84   |
| <b>IDC-VAR15H</b>    | Gelato curved glass - Width 61-1/2" - 15.2 ft <sup>3</sup> | 84   |
| <b>IDC-VAR18H</b>    | Gelato curved glass - Width 73-7/8" - 20.2 ft <sup>3</sup> | 84   |
| <b>IDC-VAR12H FG</b> | Gelato flat glass- Width 49-1/4" - 9,5 ft <sup>3</sup>     | 86   |
| <b>IDC-VAR15H FG</b> | Gelato flat glass- Width 61-1/2" - 15,2 ft <sup>3</sup>    | 86   |
| <b>IDC-VAR18H FG</b> | Gelato flat glass- Width 73-7/8" ft <sup>3</sup>           | 86   |
| <b>IDC-VBZ12</b>     | Ice-cream flat glass - Width 49- 7/32" ft <sup>3</sup>     | 88   |
| <b>IDC-VBZ15</b>     | Ice-cream flat glass - Width 61-1/2" ft <sup>3</sup>       | 88   |

DISPLAY CASES

# DISPLAY CASES - DELI / PASTRY CURVED GLASS



IDC-VBR9R



IDC-VBR12R

OPTIONAL  
DECORATION



RAL 9016  
White standard



RAL 9017  
Black



RAL 3001  
Red



RAL 5015  
Blue

Rear sliding doors  
with stay open feature



| MODELS            | →                  | ↗      | ↑      | ▬         | ☎     | 🌡         | 🏠                  | ⚙    | ⚡              | 📏     | 💰               |
|-------------------|--------------------|--------|--------|-----------|-------|-----------|--------------------|------|----------------|-------|-----------------|
|                   | Overall Dimensions |        |        | Sides     | Doors | (°F)      | (ft <sup>2</sup> ) | (HP) | [Amps]<br>115V | [Lbs] | [\$]            |
| <b>IDC-VBR9R</b>  | 37                 | 31-7/8 | 51-1/8 | 5/8 + 5/8 | 2     | 33°F/41°F | 10.0               | 1/2  | 7.8            | 489   | <b>\$11,800</b> |
| <b>IDC-VBR12R</b> | 49-1/4             | 31-7/8 | 51-1/8 | 5/8 + 5/8 | 2     | 33°F/41°F | 13.0               | 3/4  | 7.9            | 635   | <b>\$13,500</b> |
| <b>IDC-VBR18R</b> | 73-7/8             | 31-7/8 | 51-1/8 | 5/8 + 5/8 | 3     | 33°F/41°F | 20.0               | 1    | 8.8            | 950   | <b>\$17,000</b> |

ETL LISTED TO UL471 standard and sanitation classified to NSF / We reserve the right to change specifications without prior notice

## DISPLAY CASES - DELI / PASTRY CURVED GLASS



IDC-VBR12R

IDC-VBR18R

### STANDARD FEATURES



**EXTERIOR:** -AISI 304 Stainless steel, including stainless top,  
- Heavy duty ball transfer and levelling feet,  
-Glass sided panels with thermopane double glass.  
-Tilt forward glass opening system,  
-Standard decoration: White

**INTERIOR:** -AISI 304 Stainless steel,  
-LED lighting in canopy and under each glass shelf,  
-Glass shelves built into silver anodized Aluminium frames,  
easy removable for cleaning.

**INSULATION:** - CFC-Free polyurethane insulation, entire cabinet structure  
is foamed-in place using a high density polyurethane  
insulation,  
- Low GWP & Zero ODP effect.

**DOORS:** - Rear sliding doors,  
- Built-in thermopane double glass,

**REFRIGERATION:** - Digital temperature controller with automatic defrost  
system,  
- Temperature display on front,  
- Double Stainless steel evaporative pan system, first, by  
hot gas, second, by electrical resistance,  
- Forced air refrigeration system,  
- Refrigerant gas R404A,  
- Case engineered to operate at 75°F and 55% relative  
humidity.

**ELECTRICAL:** - Cord and NEMA 5-20P plug,  
- Electrical connection is 115V / 1ph / 60Hz.

**OPTIONS:** - Customizable decoration for lower front and side panels,  
- Dry case. Please consult for \$.

DISPLAY CASES

# DISPLAY CASES - DELI / PASTRY SELF SERVICE



IDC-VBR9SS



IDC-VBR12SS



IDC-VBR18SS

OPTIONAL  
DECORATION



RAL 9016  
White standard



RAL 9017  
Black



RAL 3001  
Red



RAL 5015  
Blue



Night curtain Standard  
and front brackets

| MODELS             | →                  | ↗      | ↑      | └         | 🌡️        | 📏                  | ⚙️   | ⚠️             | 📏     | 💰               |
|--------------------|--------------------|--------|--------|-----------|-----------|--------------------|------|----------------|-------|-----------------|
|                    | Overall Dimensions |        |        | Sides     | (°F)      | (ft <sup>3</sup> ) | (HP) | (Amps)<br>115V | (Lbs) | (\$)            |
| <b>IDC-VBR9SS</b>  | 37                 | 31-7/8 | 51-1/8 | 5/8 + 5/8 | 33°F/41°F | 10.0               | 1/2  | 7.8            | 430   | <b>\$11,800</b> |
| <b>IDC-VBR12SS</b> | 49-1/4             | 31-7/8 | 51-1/8 | 5/8 + 5/8 | 33°F/41°F | 13.0               | 3/4  | 7.9            | 654   | <b>\$13,500</b> |
| <b>IDC-VBR18SS</b> | 73-7/8             | 31-7/8 | 51-1/8 | 5/8 + 5/8 | 33°F/41°F | 20.0               | 1    | 8.8            | 829   | <b>\$17,000</b> |

ETL LISTED TO UL471 standard and sanitation classified to NSF / We reserve the right to change specifications without prior notice

## DISPLAY CASES - DELI / PASTRY SELF SERVICE



### STANDARD FEATURES



**EXTERIOR:** - AISI 430

**INTERIOR:** - AISI 430

**INSULATION:** - CFC-Free polyurethane insulation, entire cabinet structure is foamed-in place using a high density polyurethane insulation,  
- Low GWP & Zero ODP effect.

**REFRIGERATION:** - Digital temperature controller with automatic defrost system,  
- Temperature display on front,  
- Double Stainless steel evaporative pan system, first, by hot gas, second, by electrical resistance,  
- Forced air refrigeration system,  
- Refrigerant gas R404A,  
- Case engineered to operate at 75°F and 55% relative humidity.

**ELECTRICAL:** - Cord and NEMA 5-20P plug,  
- Electrical connection is 115V / 1ph / 60Hz.

**OPTIONS:** - Customizable decoration for lower front and side panels,  
- Dry case. Please consult for \$.

DISPLAY CASES

**DISPLAY CASES - DELI / PASTRY  
STAINLESS STEEL - FLAT GLASS**



VBR12FG



IDC-VBR12FG

| MODELS             | →                  | ↗      | ↑      | ▬         | 🚪     | 🌡️        | 📏                  | ⚙️   | ⚠️             | 📦     | 💰               |
|--------------------|--------------------|--------|--------|-----------|-------|-----------|--------------------|------|----------------|-------|-----------------|
|                    | Overall Dimensions |        |        | Sides     | Doors | (°F)      | (ft <sup>3</sup> ) | (HP) | (Amps)<br>115V | (Lbs) | (\$)            |
| <b>IDC-VBR9FG</b>  | 37                 | 31-7/8 | 51-1/8 | 5/8 + 5/8 | 2     | 33°F/41°F | 10.0               | 1/2  | 7.8            | 489   | <b>\$11,800</b> |
| <b>IDC-VBR12FG</b> | 49-1/4             | 31-7/8 | 51-1/8 | 5/8 + 5/8 | 2     | 33°F/41°F | 13.0               | 3/4  | 7.9            | 635   | <b>\$13,500</b> |
| <b>IDC-VBR18FG</b> | 73-7/8             | 31-7/8 | 51-1/8 | 5/8 + 5/8 | 3     | 33°F/41°F | 20.0               | 1    | 8.8            | 950   | <b>\$17,000</b> |

ETL LISTED TO UL471 standard and sanitation classified to NSF / We reserve the right to change specifications without prior notice

## DISPLAY CASES - DELI / PASTRY STAINLESS STEEL - FLAT GLASS



### STANDARD FEATURES



**EXTERIOR:** - AISI 304 Stainless steel, including stainless top,  
- Heavy duty ball transfer and levelling feet,  
- Glass sided panels with thermopane double glass.  
- Flat glass front & top panel.

**INTERIOR:** - AISI 304 Stainless steel,  
- LED lighting in canopy and under each glass shelf,  
- Glass shelves built into silver anodized Aluminium frames,  
easy removable for cleaning.

**INSULATION:** - CFC-Free polyurethane insulation, entire cabinet structure  
is foamed-in place using a high density polyurethane  
insulation,  
- Low GWP & Zero ODP effect.

**DOORS:** - Rear sliding doors,  
- Built-in thermopane double glass.

**REFRIGERATION:** - Digital temperature controller with automatic defrost  
system,  
- Temperature display on front,  
- Double Stainless steel evaporative pan system, first, by  
hot gas, second, by electrical resistance,  
- Forced air refrigeration system,  
- Refrigerant gas R404A,  
- Case engineered to operate at 75°F and 55% relative  
humidity.

**ELECTRICAL:** - Cord and NEMA 5-20P plug,  
- Electrical connection is 115V / 1ph / 60Hz.

**OPTIONS:** - Dry case. Please consult for \$.



PLEASE CONSULT  
FOR LEAD TIME

DISPLAY CASES

# DISPLAY CASES GELATO - CURVED GLASS



IDC-VAR18H



**Important:**  
Remove gelato products every night and store them inside a regular freezer, to allow proper defrost cycle and cleaning on the equipment.

OPTIONAL PANEL DECORATION



RAL 9016  
White standard



RAL 9017  
Black standard



RAL 3001  
Red



RAL 5015  
Blue



RAL 3504035  
Pink

Lift-up curved glass system supported by hydraulic pistons




IDC-VAR12H

MODELS

|                   | → Overall Dimensions |    |    | └ Sides     | ▭ Pans | 🌡️ (°F)    | 📦 (ft <sup>2</sup> ) | ⚙️ (HP)     | ⚠️ (Amps) | ⚡ 115V 230V | 📏 (Lbs) | 💰 (\$)          |
|-------------------|----------------------|----|----|-------------|--------|------------|----------------------|-------------|-----------|-------------|---------|-----------------|
| <b>IDC-VAR12H</b> | 49-1/4               | 45 | 52 | 1-5/8+1-5/8 | 14     | -2°F / 5°F | 3.45                 | 1-1/4       | 4.9       | 5.8         | 530     | <b>\$26,000</b> |
| <b>IDC-VAR15H</b> | 61-1/2               | 45 | 52 | 1-5/8+1-5/8 | 16     | -2°F / 5°F | 3.95                 | 1+1/2       | 5.4       | 6.1         | 660     | <b>\$30,000</b> |
| <b>IDC-VAR18H</b> | 73-7/8               | 45 | 52 | 1-5/8+1-5/8 | 20     | -2°F / 5°F | 4.95                 | 1-1/4 + 3/4 | 6.5       | 7.8         | 765     | <b>\$33,000</b> |

ETL LISTED TO UL471 standard and sanitation classified to NSF / We reserve the right to change specifications without prior notice

# DISPLAY CASES GELATO - CURVED GLASS

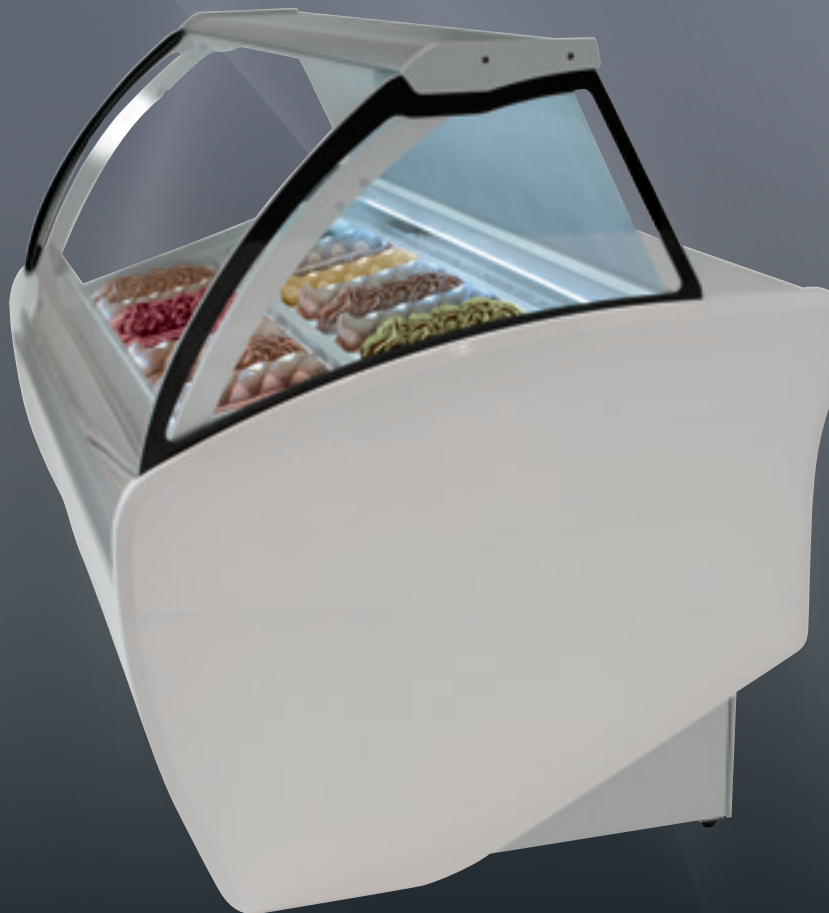

## STANDARD FEATURES



- EXTERIOR:**
- White compac quartz worktop.
  - Lift-up curved tempered security glass system.
  - ABS thermoformed decoration, White or Black standard decoration.
  - Built-in casters and levelling feet.
  - Pull down night curtain on the back.

- INTERIOR:**
- AISI 304 Stainless steel exhibition area.
  - LED lighting in the back and front.
  - Case is compatible with standard 5 Liter Gelato Pans (13-1/8"x6-1/2"x5-7/8"), pans included.

- INSULATION:**
- CFC-Free polyurethane insulation, entire cabinet structure is foamed-in place using a high density polyurethane insulation,
  - Low GWP & Zero ODP effect.

- REFRIGERATION:**
- Digital temperature controller with automatic hot gas defrost system,
  - Temperature display on front,
  - Stainless steel evaporative pan,
  - Forced air refrigeration system,
  - Refrigerant gas R404A,
  - Case engineered to operate at 75°F and 55% relative humidity.

- ELECTRICAL:**
- Cord and NEMA L14-30P plug,
  - Electrical connection are 230V [Compressor] and 115V [Digital Control].

- OPTIONS:**
- Customizable decoration for lower front and side panels,
  - Dry case, Please consult for \$.

DISPLAY CASES

# DISPLAY CASES GELATO - FLAT GLASS



**Important:**  
Remove gelato products every night and store them inside a regular freezer, to allow proper defrost cycle and cleaning on the equipment.

OPTIONAL PANEL DECORATION

RAL 9016  
White standard



RAL 9017  
Black standard



RAL 3001  
Red



RAL 5015  
Blue



RAL 3504035  
Pink



MODELS

|                      | → ↗ ↑<br>Overall Dimensions |        |    | ┌<br>Sides    | ▭<br>Pans | 🌡️<br>°F   | 🏠<br>ft <sup>2</sup> | ⚙️<br>[HP]  | ⚡<br>115V<br>(Amps) | ⚡<br>230V | 📏<br>[Lbs] | 💰<br>[\$]       |
|----------------------|-----------------------------|--------|----|---------------|-----------|------------|----------------------|-------------|---------------------|-----------|------------|-----------------|
| <b>IDC-VAR12H FG</b> | 49-1/4                      | 43-7/8 | 52 | 1-3/16+1-3/16 | 14        | -2°F / 5°F | 3.45                 | 1-1/4       | 4.9                 | 5.8       | 530        | <b>\$26,000</b> |
| <b>IDC-VAR15H FG</b> | 61-1/2                      | 43-7/8 | 52 | 1-3/16+1-3/16 | 16        | -2°F / 5°F | 3.95                 | 1+1/2       | 5.4                 | 6.1       | 660        | <b>\$30,000</b> |
| <b>IDC-VAR18H FG</b> | 73-7/8                      | 43-7/8 | 52 | 1-3/16+1-3/16 | 20        | -2°F / 5°F | 4.95                 | 1-1/4 + 3/4 | 6.5                 | 7.8       | 765        | <b>\$33,000</b> |

Tilt forward frontal tempered glass system



ETL LISTED TO UL471 standard and sanitation classified to NSF / We reserve the right to change specifications without prior notice

# DISPLAY CASES GELATO - FLAT GLASS



## STANDARD FEATURES



- EXTERIOR:**
- White compac quartz worktop.
  - Tilt forward frontal tempered glass system.
  - ABS thermoformed decoration, White or Black standard decoration.
  - Built-in casters and levelling feet.
  - Pull down night curtain on the back.

- INTERIOR:**
- AISI 304 Stainless steel exhibition area.
  - LED lighting in the back and front.
  - Case is compatible with standard 5 Liter Gelato Pans (13-1/8"x6-1/2"x5-7/8"), pans included.

- INSULATION:**
- CFC-Free polyurethane insulation, entire cabinet structure is foamed-in place using a high density polyurethane insulation,
  - Low GWP & Zero ODP effect.

- REFRIGERATION:**
- Digital temperature controller with automatic hot gas defrost system,
  - Temperature display on front,
  - Stainless steel evaporative pan,
  - Forced air refrigeration system,
  - Refrigerant gas R404A,
  - Case engineered to operate at 75°F and 55% relative humidity.

- ELECTRICAL:**
- Cord and NEMA L14-30P plug,
  - Electrical connection are 230V [Compressor] and 115V [Digital Control].

- OPTIONS:**
- Customizable decoration for lower front and side panels,
  - Dry case, Please consult for \$.

DISPLAY CASES

# DISPLAY CASES ICE-CREAM · FLAT GLASS

**NEW**




IDC-VBZ12




PLEASE CONSULT  
FOR LEAD TIME

ETL  
Intertek  
IN PROCESS



IDC-VBZ12

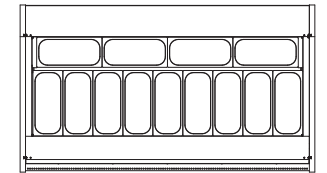

IDC-VBZ15

| MODELS           | Overall Dimensions |         |         | Sides           | Pans | (°F)       | (ft <sup>3</sup> ) | (HP) | (Amps)<br>115V | (Lbs) | (\$)            |
|------------------|--------------------|---------|---------|-----------------|------|------------|--------------------|------|----------------|-------|-----------------|
| <b>IDC-VBZ12</b> | 49-7/32            | 36-7/32 | 53-5/32 | 1-3/16 + 1-3/16 | 20   | -2°F / 5°F | 10                 | 3/8  | 4.9            | 530   | <b>\$9,300</b>  |
| <b>IDC-VBZ15</b> | 61-1/2             | 36-7/32 | 53-5/32 | 1-3/16 + 1-3/16 | 26   | -2°F / 5°F | 13                 | 3/8  | 5.4            | 562   | <b>\$10,000</b> |

ETL LISTED TO UL471 standard and sanitation classified to NSF / We reserve the right to change specifications without prior notice

NEW

# DISPLAY CASES ICE-CREAM · FLAT GLASS



## STANDARD FEATURES



- EXTERIOR:**
- AISI 304 Stainless Steel worktop,
  - Flat tempered security glass system,
  - Enamelled steel base,
  - Water resistant frontal and decoration DM lacqued,
  - AISI 304 Stainless Steel lower part decoration.
  - LED lighting frontal decoration,

- INTERIOR:**
- Enameled steel plate,
  - LED lighting upper profile,

- INSULATION:**
- CFC-Free polyurethane insulation, entire cabinet structure is foamed-in place using a high density polyurethane insulation.
  - Low GWP & Zero ODP effect.

- REFRIGERATION:**
- Digital temperature controller with automatic hot gas defrost system.
  - Evaporator coil coated with anti-corrosion material 100% polyester.
  - Hot gas defrost.
  - Refrigerant gas R404A,
  - Case engineered to operate at 75°F and 55% relative humidity.

- ELECTRICAL:**
- Cord and NEMA 5-20P plug
  - Electrical connection are 115V/ 1ph / 60 Hz

- OPTIONS:**
- Customizable decoration for lower front and side panels. Please consult for \$,



PLEASE CONSULT  
FOR LEAD TIME




White standard



# COUNTER TOP DISPLAY CASES



# REFRIGERATED INGREDIENT CASES

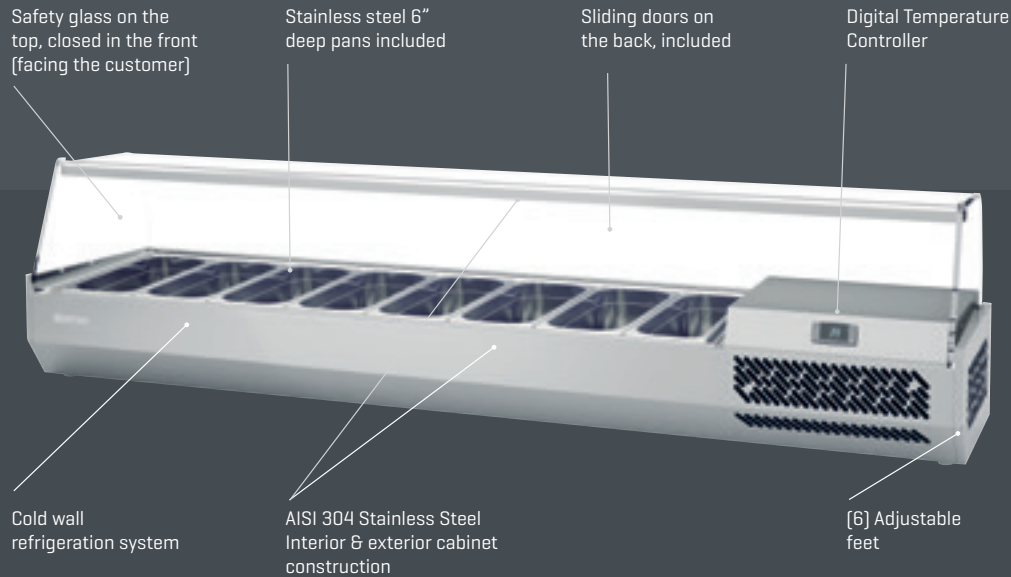

## SUSHI CASES

| MODELS     | DESCRIPTION                                | PAGE |
|------------|--|------|
| ICT-VSU50R | Right side condensing unit - Width 50"     | 92   |
| ICT-VSU63R | Right side condensing unit - Width 63-3/4" | 92   |
| ICT-VSU77R | Right side condensing unit - Width 77-5/8" | 92   |
| ICT-VSU50L | Left side condensing unit - Width 50"      | 94   |
| ICT-VSU63L | Left side condensing unit - Width 63-3/4"  | 94   |
| ICT-VSU77L | Left side condensing unit - Width 77-5/8"  | 94   |

## REFRIGERATED INGREDIENT CASES


| MODELS                  | DESCRIPTION                                    | PAGE |
|-------------------------|--|------|
| ICT-VIP1330B1/3GLASSTOP | Pizza ingredient displays - 4 pans - Glass     | 96   |
| ICT-VIP1490B1/3GLASSTOP | Pizza ingredient displays - 5 pans - Glass     | 96   |
| ICT-VIP1740B1/3GLASSTOP | Pizza ingredient displays - 6 pans - Glass     | 96   |
| ICT-VIP1980B1/3GLASSTOP | Pizza ingredient displays - 8 pans - Glass     | 96   |
| ICT-VIP1330B1/3SOLIDLID | Pizza ingredient displays - 4 pans - Solid Lid | 98   |
| ICT-VIP1490B1/3SOLIDLID | Pizza ingredient displays - 5 pans - Solid Lid | 98   |
| ICT-VIP1740B1/3SOLIDLID | Pizza ingredient displays - 6 pans - Solid Lid | 98   |
| ICT-VIP1980B1/3SOLIDLID | Pizza ingredient displays - 8 pans - Solid Lid | 98   |

COUNTER TOP DISPLAY CASES

# COUNTERTOP DISPLAY CASES - SUSHI CASES RIGHT SIDE CONDENSING UNIT



ICT-VSU63R

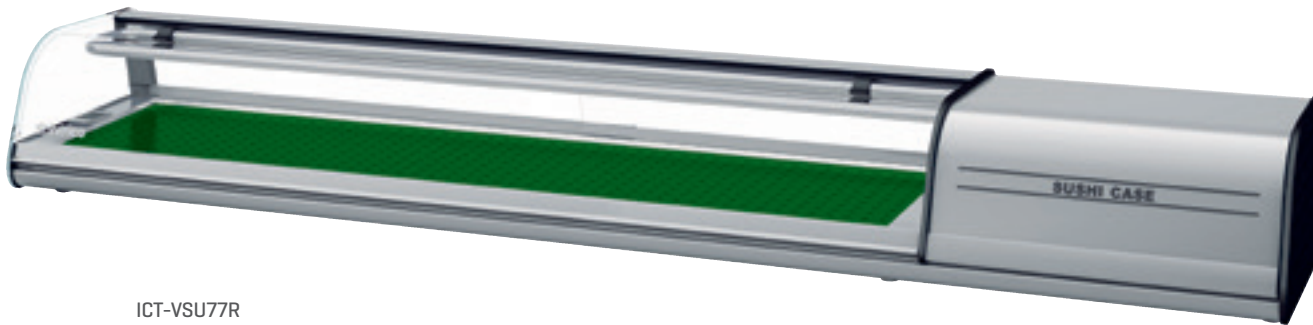

ICT-VSU77R



**Important:**  
Do only introduce refrigerated products! For daily cleaning, remove products and disconnect unit.

| MODELS            | →                  | ↗      | ↑ | 🌡️        | 📏                  | ⚙️   | ⚠️             | 📏     | 💰              |
|-------------------|--------------------|--------|---|-----------|--------------------|------|----------------|-------|----------------|
|                   | Overall Dimensions |        |   | (°F)      | (ft <sup>3</sup> ) | (HP) | (Amps)<br>115V | (Lbs) | (\$)           |
| <b>ICT-VSU50R</b> | 50                 | 16-1/8 | 9 | 30°F/34°F | .56                | 1/8  | 3.2            | 92    | <b>\$3,770</b> |
| <b>ICT-VSU63R</b> | 63-3/4             | 16-1/8 | 9 | 30°F/34°F | .84                | 1/8  | 3.4            | 132   | <b>\$4,250</b> |
| <b>ICT-VSU77R</b> | 77-5/8             | 16-1/8 | 9 | 30°F/34°F | 1.14               | 1/8  | 3.8            | 171   | <b>\$4,650</b> |

ETL LISTED TO UL471 standard and sanitation classified to NSF / We reserve the right to change specifications without prior notice

## COUNTERTOP DISPLAY CASES - SUSHI CASES RIGHT SIDE CONDENSING UNIT



### STANDARD FEATURES



**EXTERIOR:** - AISI 304 Stainless steel,  
- Rear sliding windows, included.  
- Anodized aluminium silver profile.  
- Levelling feet.

**INTERIOR:** - AISI 304 Stainless steel.  
- Internal drain plug for easy cleaning.  
- LED Lighting in top profile

**INSULATION:** - CFC-Free polyurethane insulation, entire cabinet structure is foamed-in place using a high density polyurethane insulation,  
- Low GWP & Zero ODP effect.

**REFRIGERATION:** - Digital temperature controller,  
- Manual defrost system,  
- Gravity coil on top and cold plate refrigeration system on the bottom,  
- Refrigerant gas R134a.

**ELECTRICAL:** - Cord and NEMA 5-15P plug,  
- Electrical connection is 115V / 1ph / 60Hz.

COUNTER TOP DISPLAY CASES


**COUNTERTOP DISPLAY CASES - SUSHI CASES  
LEFT SIDE CONDENSING UNIT**



ICT-VSU50L



ICT-VSU63L

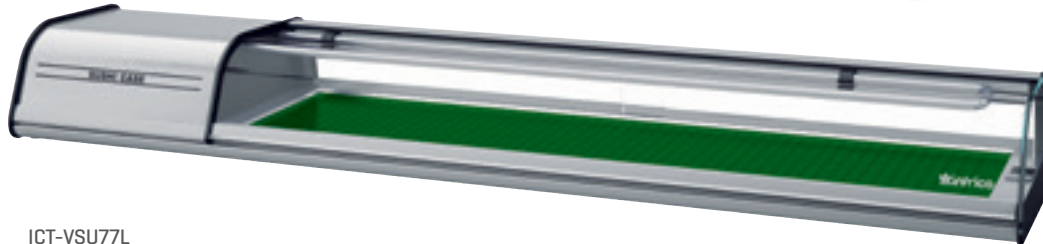

ICT-VSU77L

| MODELS            | →                  | ↗      | ↑ | 🌡️        | 📦                  | 🔧    | ⚡              | 📏     | 💰              |
|-------------------|--------------------|--------|---|-----------|--------------------|------|----------------|-------|----------------|
|                   | Overall Dimensions |        |   | (°F)      | (ft <sup>3</sup> ) | (HP) | (Amps)<br>115V | (Lbs) | (\$)           |
| <b>ICT-VSU50L</b> | 50                 | 16-1/8 | 9 | 30°F/34°F | .56                | 1/8  | 3.2            | 92    | <b>\$3,770</b> |
| <b>ICT-VSU63L</b> | 63-3/4             | 16-1/8 | 9 | 30°F/34°F | .84                | 1/8  | 3.4            | 132   | <b>\$4,250</b> |
| <b>ICT-VSU77L</b> | 77-5/8             | 16-1/8 | 9 | 30°F/34°F | 1.14               | 1/8  | 3.8            | 171   | <b>\$4,650</b> |

ETL LISTED TO UL471 standard and sanitation classified to NSF / We reserve the right to change specifications without prior notice

## COUNTERTOP DISPLAY CASES - SUSHI CASES LEFT SIDE CONDENSING UNIT



### STANDARD FEATURES



- EXTERIOR:**
- AISI 304 Stainless steel,
  - Front lift-up security tempered glass system.
  - Rear sliding windows, included.
  - Anodized aluminium silver profile.
  - Levelling feet.

- INTERIOR:**
- AISI 304 Stainless steel.
  - AISI 304 Stainless steel tray,
  - Internal drain plug for easy cleaning.
  - LED Lighting in top profile

- INSULATION:**
- CFC-Free polyurethane insulation, entire cabinet structure is foamed-in place using a high density polyurethane insulation,
  - Low GWP & Zero ODP effect.

- REFRIGERATION:**
- Digital temperature controller,
  - Manual defrost system,
  - Gravity coil on top and cold plate refrigeration system on the bottom,
  - Refrigerant gas R134a.

- ELECTRICAL:**
- Cord and NEMA 5-15P plug,
  - Electrical connection is 115V / 1ph / 60Hz.




**Important:**

Do only introduce refrigerated products! For daily cleaning, remove products and disconnect unit.

COUNTER TOP DISPLAY CASES

# COUNTERTOP DISPLAY CASES REFRIGERATED INGREDIENT CASES - GLASS TOP

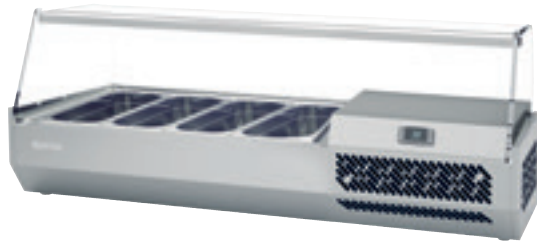

ICT-VIP1330B1/3 GLASSTOP



ICT-VIP1490B1/3 GLASSTOP



ICT-VIP1980B1/3 GLASSTOP

| MODELS                         | →                  | ↗      | ↑      | 📦    | 🌡️        | 📏     | ⚙️   | ⚠️             | 📏     | 💰              |
|--------------------------------|--------------------|--------|--------|------|-----------|-------|------|----------------|-------|----------------|
|                                | Overall Dimensions |        |        | Pans | (°F)      | (ft³) | (HP) | (Amps)<br>115V | (Lbs) | (\$)           |
| <b>ICT-VIP1330B1/3GLASSTOP</b> | 52-3/4             | 16-1/4 | 17-3/4 | 4    | 39°F/41°F | 1.30  | 1/6  | 1.82           | 125   | <b>\$4,600</b> |
| <b>ICT-VIP1490B1/3GLASSTOP</b> | 58-3/4             | 16-1/4 | 17-3/4 | 5    | 39°F/41°F | 1.55  | 1/6  | 1.82           | 132   | <b>\$4,850</b> |
| <b>ICT-VIP1740B1/3GLASSTOP</b> | 68-1/4             | 16-1/4 | 17-3/4 | 6    | 39°F/41°F | 1.83  | 1/6  | 1.82           | 145   | <b>\$5,100</b> |
| <b>ICT-VIP1980B1/3GLASSTOP</b> | 77-7/8             | 16-1/4 | 17-3/4 | 8    | 39°F/41°F | 2.36  | 1/6  | 1.82           | 156   | <b>\$5,600</b> |

ETL LISTED TO UL471 standard and sanitation classified to NSF / We reserve the right to change specifications without prior notice

# COUNTERTOP DISPLAY CASES REFRIGERATED INGREDIENT CASES - GLASS TOP

## STANDARD FEATURES



- EXTERIOR:**
- AISI 304 Stainless steel,
  - Safety glass on the top, closed in the front (facing the customer) and open in the back facing the operator).
  - Sliding doors on the back.
  - Levelling feet.

- INTERIOR:**
- AISI 304 Stainless steel.
  - Sealed interior floors and rounded cabinet corners,
  - Stainless steel 6" deep pans, included.

- INSULATION:**
- CFC-Free polyurethane insulation, entire cabinet structure is foamed-in place using a high density polyurethane insulation,
  - Low GWP & Zero ODP effect.

- REFRIGERATION:**
- Digital temperature controller with automatic defrost system,
  - Cold wall refrigeration system,
  - Refrigerant gas R134a.

- ELECTRICAL:**
- Cord and NEMA 5-15P plug,
  - Electrical connection is 115V / 1ph / 60Hz.

ICT-VIP1740B1/3 GLASSTOP



**Important:**  
Do only introduce refrigerated products! For daily cleaning, remove products and disconnect unit.

COUNTER TOP DISPLAY CASES

# COUNTERTOP DISPLAY CASES REFRIGERATED INGREDIENT CASES - SOLID LID



ICT-VIP1330B1/3 SOLIDLID



ICT-VIP1490B1/3 SOLIDLID




ICT-VIP1740B1/3 SOLIDLID

| MODELS                         | →                  | ↗      | ↑      | 📦    | 🌡️        | 📏                  | ⚙️   | ⚠️             | 📏     | 💰              |
|--------------------------------|--------------------|--------|--------|------|-----------|--------------------|------|----------------|-------|----------------|
|                                | Overall Dimensions |        |        | Pans | (°F)      | (ft <sup>3</sup> ) | (HP) | [Amps]<br>115V | [Lbs] | (\$)           |
| <b>ICT-VIP1330B1/3SOLIDLID</b> | 52-3/4             | 16-1/4 | 10-1/4 | 4    | 39°F/41°F | 1.30               | 1/6  | 1.82           | 125   | <b>\$3,500</b> |
| <b>ICT-VIP1490B1/3SOLIDLID</b> | 58-3/4             | 16-1/4 | 10-1/4 | 5    | 39°F/41°F | 1.55               | 1/6  | 1.82           | 132   | <b>\$3,750</b> |
| <b>ICT-VIP1740B1/3SOLIDLID</b> | 68-1/4             | 16-1/4 | 10-1/4 | 6    | 39°F/41°F | 1.83               | 1/6  | 1.82           | 145   | <b>\$4,000</b> |
| <b>ICT-VIP1980B1/3SOLIDLID</b> | 77-7/8             | 16-1/4 | 10-1/4 | 8    | 39°F/41°F | 2.36               | 1/6  | 1.82           | 156   | <b>\$4,300</b> |

ETL LISTED TO UL471 standard and sanitation classified to NSF / We reserve the right to change specifications without prior notice

## COUNTERTOP DISPLAY CASES REFRIGERATED INGREDIENT CASES - SOLID LID

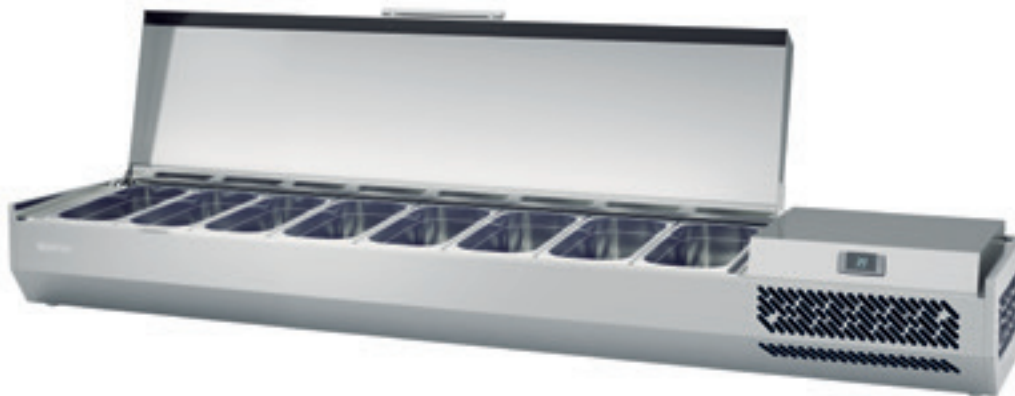

ICT-VIP1980B1/3 SOLIDLID



### STANDARD FEATURES



- EXTERIOR:**
  - AISI 304 Stainless steel,
  - AISI 304 Stainless steel lid.
  - Levelling feet.
- INTERIOR:**
  - AISI 304 Stainless steel.
  - Sealed interior floors and rounded cabinet corners,
  - Stainless steel 6" deep pans, included.
- INSULATION:**
  - CFC-Free polyurethane insulation, entire cabinet structure is foamed-in place using a high density polyurethane insulation,
  - Low GWP & Zero ODP effect.
- REFRIGERATION:**
  - Digital temperature controller with automatic defrost system,
  - Cold wall refrigeration system,
  - Refrigerant gas R134a.
- ELECTRICAL:**
  - Cord and NEMA 5-15P plug,
  - Electrical connection is 115V / 1ph / 60Hz.

**Important:**



Do only introduce refrigerated products! For daily cleaning, remove products and disconnect unit.



**9 AIR CURTAINS**



# AIR CURTAINS

Digital Controller, with automatic Defrost system

AISI 304 Stainless Steel exterior & interior

LED lighting in canopy and under each shelf

Available multiplexing option

[4] Rows of adjustable shelves, with price channels included

Model: EML12INOXPM1

Adjustable feet and built-in casters

Stainless Steel evaporative double trays first by hot gas second by electrical resistance



## AIR CURTAINS - VERTICAL GLASS SIDED

| MODELS       | DESCRIPTION  | PAGE |
|--------------|--|------|
| IAG-EML9CM1  | Decoration black standard - 40" W - 78-3/4" H - 23.7 ft <sup>3</sup>     | 102  |
| IAG-EML12CM1 | Decoration black standard - 52-1/4" W - 78-3/4" H - 31.5 ft <sup>3</sup> | 102  |
| IAG-EML18CM1 | Decoration black standard - 76-7/8" W - 78-3/4" H - 47.3 ft <sup>3</sup> | 102  |

## AIR CURTAINS - VERTICAL GLASS SIDED - STAINLESS STEEL

| MODELS          | DESCRIPTION  | PAGE |
|-----------------|--|------|
| IAG-EML9INOXM1  | Decoration black standard - 40" W - 78-3/4" H - 23.7 ft <sup>3</sup>     | 104  |
| IAG-EML12INOXM1 | Decoration black standard - 52-1/4" W - 78-3/4" H - 31.5 ft <sup>3</sup> | 104  |
| IAG-EML18INOXM1 | Decoration black standard - 76-7/8" W - 78-3/4" H - 47.3 ft <sup>3</sup> | 104  |

AIR CURTAINS

# AIR CURTAINS VERTICAL & GLASS SIDED



IAG-EML9CM1



IAG-EML12CM1



IAG-EML18CM1

| MODELS              | →                  | ↗      | ↑      | 🌡️        | 📦     | ⚙️    | ⚠️             | ⚖️   | 💰     |                 |
|---------------------|--------------------|--------|--------|-----------|-------|-------|----------------|------|-------|-----------------|
|                     | Overall Dimensions |        |        | (°F)      | (ft³) | (HP)  | 115V<br>[Amps] | 230V | (Lbs) | (\$)            |
| <b>IAG-EML9CM1</b>  | 40                 | 33-3/8 | 78-3/4 | 33°F/41°F | 23.7  | 3/4   | 13.0           | -    | 534   | <b>\$11,300</b> |
| <b>IAG-EML12CM1</b> | 52-1/4             | 33-3/8 | 78-3/4 | 33°F/41°F | 31.5  | 1     | 3.4            | 5.8  | 636   | <b>\$13,500</b> |
| <b>IAG-EML18CM1</b> | 76-7/8             | 33-3/8 | 78-3/4 | 33°F/41°F | 47.3  | 1-1/4 | 3.9            | 7.9  | 828   | <b>\$16,000</b> |

ETL LISTED TO UL471 standard and sanitation classified to NSF / We reserve the right to change specifications without prior notice

## AIR CURTAINS VERTICAL & GLASS SIDED



Air curtains. Piola, South Beach, FL.

IAG-EML18CM1

### STANDARD FEATURES



- EXTERIOR:**
  - Pull down night curtain.
  - Black prepainted steel cabinet, standard,
  - Glass sided panels,
  - Heavy duty ball transfer and levelling feet.
- INTERIOR:**
  - LED Lighting in canopy and under each shelf.
  - Black prepainted steel cabinet, standard.
- INSULATION:**
  - CFC-Free polyurethane insulation, entire cabinet structure is foamed-in place using a high density polyurethane insulation,
  - Low GWP & Zero ODP effect.
- SHELVING:**
  - (4) Four rows of adjustable shelves,
  - Price channels included.
- REFRIGERATION:**
  - Digital temperature controller with automatic defrost system,
  - Double Stainless Steel evaporative pan system, first, by hot gas, second, by electrical resistance,
  - Extractable condensing unit for easy service,
  - Forced refrigeration system,
  - Refrigerant gas R404A,
  - Case engineered to operate at 75°F and 55% relative humidity.
- ELECTRICAL:**
  - IAG-EML9CM1: Cord and Nema 5-20P plug. Electrical connection is 115V/1ph/60Hz,
  - IAG-EML12CM1 & IAG-EML18CM1: Cord and NEMA L14-30P plug. Electrical connection are 230V [Compressor] and 115V [Digital control & LED lighting system] / 1ph / 60Hz.
- OPTIONS:**
  - Customizable decoration for lower front and side panels, Please consult for \$.

AIR CURTAINS

# AIR CURTAINS VERTICAL & GLASS SIDED - STAINLESS STEEL



IAG-EML12INOXM1



IAG-EML9INOXM1

| MODELS                 | →                  | ↗      | ↑      | 🌡️        | 📏                  | ⚙️    | ⚡              | ⚡    | 📏     | 💰               |
|------------------------|--------------------|--------|--------|-----------|--------------------|-------|----------------|------|-------|-----------------|
|                        | Overall Dimensions |        |        | (°F)      | (ft <sup>3</sup> ) | (HP)  | 115V<br>(Amps) | 230V | (Lbs) | (\$)            |
| <b>IAG-EML9INOXM1</b>  | 40                 | 33-3/8 | 78-3/4 | 33°F/41°F | 23.7               | 3/4   | 13.0           | -    | 534   | <b>\$12,700</b> |
| <b>IAG-EML12INOXM1</b> | 52-1/4             | 33-3/8 | 78-3/4 | 33°F/41°F | 31.5               | 1     | 3.4            | 5.8  | 636   | <b>\$14,800</b> |
| <b>IAG-EML18INOXM1</b> | 76-7/8             | 33-3/8 | 78-3/4 | 33°F/41°F | 47.3               | 1-1/4 | 3.9            | 7.9  | 828   | <b>\$18,000</b> |

ETL LISTED TO UL471 standard and sanitation classified to NSF / We reserve the right to change specifications without prior notice

# AIR CURTAINS VERTICAL & GLASS SIDED - STAINLESS STEEL



IAG-EML12INOXM1

Stainless steel air curtains, Delirio Restaurant, Doral, FL.

## STANDARD FEATURES



- EXTERIOR:**
- AISI 304 Stainless Steel
  - Pull down night curtain.
  - Glass sided panels,
  - Heavy duty ball transfer and levelling feet.

- INTERIOR:**
- AISI 304 Stainless Steel
  - Stainless Steel internal panel perforated.
  - LED Lighting in canopy and under each shelf.

- INSULATION:**
- CFC-Free polyurethane insulation, entire cabinet structure is foamed-in place using a high density polyurethane insulation,
  - Low GWP & Zero ODP effect.

- SHELVING:**
- (4) Four rows of adjustable shelves,
  - Price channels included.

- REFRIGERATION:**
- Digital temperature controller with automatic defrost system,
  - Double Stainless Steel evaporative pan system, first, by hot gas, second, by electrical resistance,
  - Extractable condensing unit for easy service,
  - Forced refrigeration system,
  - Refrigerant gas R404A,
  - Case engineered to operate at 75°F and 55% relative humidity.

- ELECTRICAL:**
- IAG-EML9INOXM1: Cord and Nema 5-20P plug. Electrical connection is 115V/1ph/60Hz,
  - IAG-EML12INOXM1 & IAG-EML18INOXM1: Cord and NEMA L14-30P plug. Electrical connection are 230V [Compressor] and 115V [Digital control & LED lighting system] / 1ph / 60Hz.



# 10 ACCESSORIES & PARTS



# ACCESSORIES & PARTS

## SLIDES

| CODE                          | DESCRIPTION                         | MODELS                               | PRICE \$ |
|-------------------------------|-------------------------------------|--------------------------------------|----------|
| <b>STAINLESS STEEL SLIDES</b> |                                     |                                      |          |
| GUIAUAN60                     | Slides kit 24-7/32"                 | All AN Models                        | 84       |
| GUIA503X15 + GUIA503X20       | Slides kit 21-21/32"                | All AGN, MPG Models                  | 38       |
| 503x02                        | Slides kit L=25-1/4", AGN K&T LEFT  |                                      | 42       |
| 503x03                        | Slides kit L=25-1/4", AGN K&T RIGHT |                                      | 42       |
| GUIA503MR01                   | Slides kit , MR LEFT                | MR                                   | 45       |
| GUIA503MR02                   | Slides kit , MR RIGHT               | MR                                   | 45       |
| 10GB7060                      | Slides kit 26-55/64"                |                                      | 43       |
| 10GB7061                      | Slides kit 26-55/64"                |                                      | 43       |
| 10GB7060 + 10GB7061           | Slides kit 26-55/64"                | All AGB Models                       | 85       |
| 10MR1885                      | Slides kit 25-15/64"                |                                      | 85       |
| 10MR1886                      | Slides kit 25-15/64"                |                                      | 43       |
| 10MR1885 + 10MR1886           | Slides kit 25-15/64"                | All MR                               | 43       |
| 3200X0226                     | Slides kit 15-1/2"                  | EVV23Retro, EVV494SDRetro, MR76Retro | 23       |
| 3200X0225                     | Slides kit 15-1/2" + 17-1/4"        | EVV23Retro, EVV494SDRetro, MR76Retro | 23       |

## SHELVING

| CODE                               | DESCRIPTION                                   | MODELS                                     | PRICE \$ |
|------------------------------------|---|--|----------|
| <b>PLASTIC COATED WIRE SHELVES</b> |   |  |          |
| 502X14                             | GN 2/1 Shelf 20-7/8" x 25-19/32"              | All AN, AGB Models                         | 117      |
| 502X12                             | GN 1/1 Shelf 12-51/64" x 25-19/32"            | All AGN, MPG Models                        | 87       |
| 502X73                             | Shelf 22-29/64" x 17-13/64"                   | All UC27, UC72 Models                      | 108      |
| 502X74                             | Shelf 21-1/4" x 17-13/64"                     | All UC48, UC 72 Models                     | 102      |
| 502X75                             | Shelf 27-19/64" x 17-13/64"                   | All UC60 Models                            | 132      |
| 502X77                             | Shelf 20" x 25-19/32"                         | All MR Models                              | 114      |
| 3200X0223 [ 505X11]                | Shelf 15-3/4" x 23"                           | EVV23Retro                                 | 85       |
| 3200X0224 [505X12]                 | Shelf 15-3/4" x 24-1/4"                       | EVV49Retro                                 | 85       |
| 3200X0191                          | Shelf 1-3/4" x 20-9/32"                       | EVV494SDRetro, MR76Retro                   | 87       |
| 502X79                             | Milk Cooler Shelf 27-3/4" x 11-7/8" [14-1/4"] | All IMC Models                             | 117      |
| 502X82                             | Shelf 24" x 18-5/16"                          | All ERV Models                             | 114      |
| 502X83                             | Shelf 19-3/16" x 18-5/16"                     | ERV60IISD, ERV60IIGD, ERV84IISD, ERV84IIGD | 111      |



# ACCESSORIES & PARTS

## Plastic-Coated Extra-Dense Wire Shelves

|        |  |                          |     |
|--------|--|--------------------------|-----|
| 502X60 | GN 2/1 Extra-Dense Shelf 20-7/8" x 25-19/32"   | All AN_CR, AGB_CR Models | 141 |
| 502X62 | GN 1/1 Extra-Dense Shelf 12-51/64" x 25-19/32" | All AGN_CR Models        | 105 |

## STAINLESS STEEL WIRE SHELVES

|        |  |                     |     |
|--------|--|---------------------|-----|
| 502X58 | GN 2/1 Stainless Steel Shelf 20-7/8" x 25-19/32"   | All AN, AGB Models  | 210 |
| 502X46 | GN 1/1 Stainless Steel Shelf 12-51/64" x 25-19/32" | All AGN, MPG Models | 153 |
| 502X78 | Stainless Steel Shelf 20" x 25-19/32"              | All MR Models       | 213 |
| 502X47 | Stainless Steel Shelf 23-5/8" x 15-3/4"            | All VC Models       | 174 |

## MEZZANINES SHELVES

|                    |   |                   |     |
|--------------------|---|-------------------|-----|
| BAZM09400          | Mezzanine Shelf Air Curtains 938                  | All EML 9 Models  | 289 |
| BAZM09400 inox     | Mezzanine Shelf Air Curtains 938 stainless steel  | All EML 9 Models  | 488 |
| BAZM12400          | Mezzanine Shelf Air Curtains 1250                 | All EML 12 Models | 347 |
| BAZM12400 inox     | Mezzanine Shelf Air Curtains 1250 stainless steel | All EML 12 Models | 646 |
| 2 X BAZM09400      | Mezzanine Shelf Air Curtains 1875                 | All EML 18 Models | 578 |
| 2 X BAZM09400 inox | Mezzanine Shelf Air Curtains 1875 stainless steel | All EML 18 Models | 977 |

## SHELF CLIPS

| CODE   | DESCRIPTION                    | MODELS                        | PRICE \$ |
|--------|--------------------------------|-------------------------------|----------|
| 506X08 | Stainless Steel Shelf Clips UC | All UC Models, All ERV Models | 7        |

## TRAY DIVIDER

| CODE | DESCRIPTION | MODELS | PRICE \$ |
|------|-------------|--------|----------|
|------|-------------|--------|----------|

### PLASTIC COATED TRAY DIVIDER


|        |                                     |  |    |
|--------|-------------------------------------|--|----|
| 502X21 | Plastic coated tray divider AN, AGN | AN49, AN49BT, AN67, AN67BT, AN49MX, AGN602, AGN602BT, AGN602MX | 72 |
| 502X23 | Plastic coated tray divider AGB     | AGB49, AGB49BT, AGB23-2, AGB49-4                               | 70 |

### PLASTIC-COATED EXTRA-DENSE TRAY DIVIDER

|        |   |                          |     |
|--------|---|--------------------------|-----|
| 502X41 | Plastic-coated extra-dense tray divider AN, AGN | AN49CR, AN67CR, AGN602CR | 99  |
| 502X63 | Plastic-coated extra-dense tray divider AGB     | AGB49CR, AGB49BTCR       | 122 |

### STAINLESS STEEL TRAY DIVIDER

|        |                                      |  |     |
|--------|--------------------------------------|--|-----|
| 502X52 | Stainless Steel tray divider AN, AGN | AN49, AN49BT, AN67, AN67BT, AN49MX, AGN602, AGN602BT, AGN602MX | 141 |
| 502X67 | Stainless Steel tray divider AGB     | AGB49, AGB49BT, AGB23-2, AGB49-4                               | 150 |




ETL LISTED TO UL471 standard and sanitation classified to NSF / We reserve the right to change specifications without prior notice

## ACCESSORIES & PARTS

### GLASS SHELF KIT (Display Cases)

| CODE    | DESCRIPTION                            | MODELS          | PRICE \$ |
|---------|--|-----------------|----------|
| 604M14  | Glass top shelf 36-11/32" x 10-53/64"  | VBR9R, VBR9FG   | 228      |
| 604M15  | Glass bottom shelf 36-11/32" x 14-3/4" | VBR9R, VBR9FG   | 262      |
| 604M16  | Glass top shelf 48-5/8" x 10-53/64"    | VBR12R, VBR12FG | 278      |
| 604M17  | Glass bottom shelf 48-5/8" x 14-3/4"   | VBR12R, VBR12FG | 331      |
| 604M18  | Glass top shelf 73-1/4" x 10-53/64"    | VBR18R, VBR18FG | 342      |
| 604M19  | Glass bottom shelf 73-1/4" x 14-3/4"   | VBR18R, VBR18FG | 348      |
| 604M20  | Glass top shelf 36-11/32" x 12-13/64"  | VBR9SS          | 235      |
| 604M21  | Glass middle shelf 36-11/32" x 15-3/8" | VBR9SS          | 273      |
| 604M22  | Glass bottom shelf 36-11/32" x 17"     | VBR9SS          | 295      |
| 604M23  | Glass top shelf 48-5/8" x 12-13/64"    | VBR12SS         | 294      |
| 604M24  | Glass middle shelf 48-5/8" x 15-3/8"   | VBR12SS         | 331      |
| 604M25  | Glass bottom shelf 48-5/8" x 17"       | VBR12SS         | 333      |
| 604M26  | Glass top shelf 73-1/4" x 12-13/64"    | VBR18SS         | 339      |
| 604M27  | Glass middle shelf 73-1/4" x 15-3/8"   | VBR18SS         | 349      |
| 604M28  | Glass bottom shelf 73-1/4" x 17"       | VBR18SS         | 358      |
| 604V380 | Glass top shelf VAR12R                 | VAR12R          | 172      |
| 604V381 | Glass top shelf VAR15R                 | VAR15R          | 374      |
| 604V382 | Glass top shelf VAR18R                 | VAR18R          | 378      |
| 604V371 | Glass top shelf VARAA90°               | VARAA90°        | 393      |
| 604V372 | Glass top shelf VARAC90°               | VARAC90°        | 174      |



### REAR SLIDING DOORS

| CODE     | DESCRIPTION               | MODELS | PRICE \$ |
|----------|---------------------------|--------|----------|
| PUEV12CT | Rear sliding doors VBC12R | VBC12R | 411      |
| PUEV15CT | Rear sliding doors VBC15R | VBC15R | 555      |
| PUEV18CT | Rear sliding doors VBC18R | VBC18R | 840      |

# ACCESORIES & PARTS

## FLAT LID


| CODE        | DESCRIPTION                       | MODELS  | PRICE \$ |
|-------------|-----------------------------------|---------|----------|
| JTAP14MR41  | Complete Flat Lid MR41            | MR 41   | 353      |
| JTAP14MR67  | Complete Flat Lid MR67            | MR 67   | 562      |
| JTAP14MR93  | Complete Flat Lid MR93            | MR 93   | 605      |
| JTAP14MR119 | Complete Flat Lid MR119           | MR 119  | 687      |
| TAP14MR3    | Complete Lid MR model for 3 trays | MR      | 314      |
| TAP14MR5    | Complete Lid MR model for 5 trays | MR      | 341      |
| TAP14MR6    | Complete Lid MR model for 6 trays | MR      | 346      |
| TAPUC27PF   | Complete Lid UC27P                | UC27P   | 177      |
| TAPUC48PF   | Complete Lid UC48P                | UC48P   | 252      |
| TAPUC60PF   | Complete Lid UC60P                | UC60P   | 318      |
| TAPUC72PF   | Complete Lid UC72P                | UC72P   | 354      |
| TAPUC27PMTF | Complete Lid UC27PMT              | UC27PMT | 207      |
| TAPUC48PMTF | Complete Lid UC48PMT              | UC48PMT | 312      |
| TAPUC60PMTF | Complete Lid UC60PMT              | UC60PMT | 366      |
| TAPUC72PMTF | Complete Lid UC72PMT              | UC72PMT | 384      |

## CASTERS / LEGS

| CODE    | DESCRIPTION                              | PRICE \$ |
|---------|--|----------|
| 705X16  | Black caster, 4" Diameter                | 94       |
| 705X17  | Black caster, 4" Diameter, front locking | 124      |
| 950A053 | Black caster, 2" Diameter                | 73       |
| 950A281 | Black caster, 2" Diameter, front locking | 101      |
| 506X42  | 6" Adjustable feet                       | 48       |
| 506X61  | Adjustable feet                          | 38       |

## LOCKS

| CODE    | DESCRIPTION      | MODELS                     | PRICE \$ |
|---------|------------------|----------------------------|----------|
| 950A054 | Lock 135 R-14    | All AN, AGN, AGB Models    | 39       |
| 506X120 | Right lock       | All MR Models [Right door] | 87       |
| 506X121 | Left lock        | All MR Models [Left door]  | 87       |
| 506X60  | Lock Ref.: 2038  | All ERV Models             | 87       |
| CERMK   | Milk cooler lock | All IMC                    | 126      |

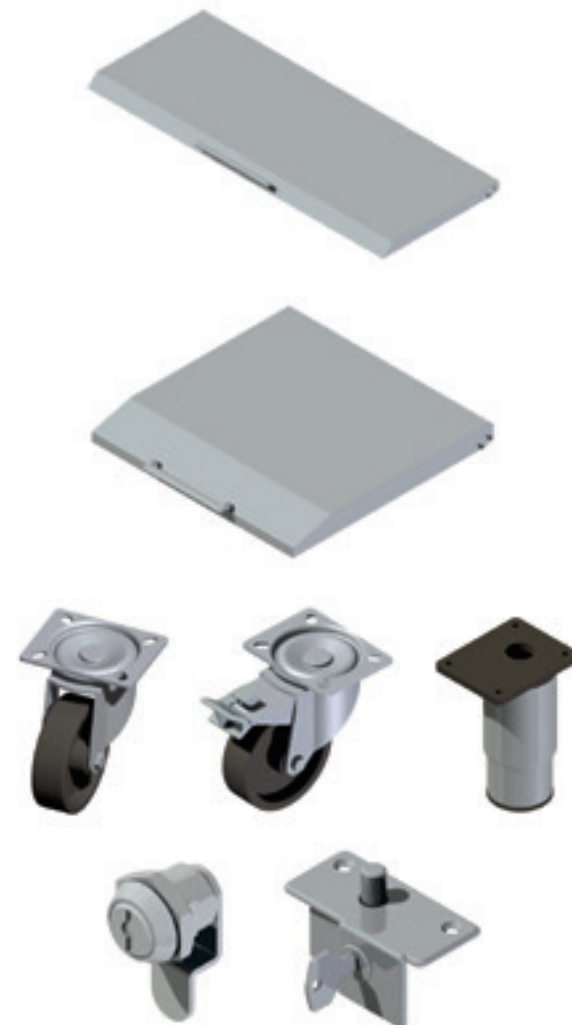

ETL LISTED TO UL471 standard and sanitation classified to NSF / We reserve the right to change specifications without prior notice

# ACCESSORIES & PARTS

## OVERSHELF KITS (SINGLE/DOUBLE)

| CODE                                     | DESCRIPTION                                      | PRICE \$ |
|--|--|----------|
| <b>SINGLE OVERSHELVES (16"D X 20"H*)</b> |  |          |
| ESTSUC27                                 | Single Overshelf kit for UC27R / P / PMT / F / D | 252      |
| ESTSUC48                                 | Single Overshelf kit for UC48R / P / PMT / F / D | 345      |
| ESTSUC60                                 | Single Overshelf kit for UC60R / P / PMT / F / D | 402      |
| ESTSUC72                                 | Single Overshelf kit for UC72R / P / PMT         | 456      |
| ESTSMR41                                 | Single Overshelf kit MR41 / EN / BT              | 312      |
| ESTSMR67                                 | Single Overshelf kit MR67 / EN / BT              | 432      |
| <b>DOUBLE OVERSHELVES (16"D X 33"H*)</b> |  |          |
| ESTDUC27                                 | Double Overshelf kit for UC27R / P / PMT / F / D | 459      |
| ESTDUC48                                 | Double Overshelf kit for UC48R / P / PMT / F / D | 648      |
| ESTDUC60                                 | Double Overshelf kit for UC60R / P / PMT / F / D | 756      |
| ESTDUC72                                 | Double Overshelf kit for UC72R / P / PMT         | 867      |
| ESTDMR41                                 | Double Overshelf kit MR41 / EN / BT              | 582      |
| ESTDMR67                                 | Double Overshelf kit MR67 / EN / BT              | 819      |

\*Indicates maximum height from countertop to shelftop.

Overshelf kits are available for undercounters, deep undercounters and prep tables (sandwich/salad, megatop and pizza). Height is adjustable in single and double overshelf kits. Made of heavy-gauge stainless steel.

## DRAWERS

| CODE                  | DESCRIPTION                        | PRICE \$ |
|-----------------------|------------------------------------|----------|
| JCAJ10MR442C          | Kit of drawers MR41 / MR67 / MR93  | 1,371    |
| JCAJ10GN1/2           | Kit of drawers UC48R / D and UC72R | 1,353    |
| JCAJUC271/2+10UC27139 | Kit of drawers UC27R / D           | 1,050    |
| JCAJUC481/2+10UC48139 | Kit of drawers UC48R / D           | 1,035    |
| JCAJUC601/2+10UC60139 | Kit of drawers UC60R / D           | 1,065    |
| JCAJUC481/2+10UC72139 | Kit of drawers UC72R / D           | 1,065    |

## 4" BACKSPLASH

| CODE      | DESCRIPTION                 | PRICE \$ |
|-----------|-----------------------------|----------|
| ENCCPUC27 | 4" Backsplash UC27R / F / D | 361      |
| ENCCPUC48 | 4" Backsplash UC48R / F / D | 494      |
| ENCCPUC60 | 4" Backsplash UC60R / F / D | 616      |
| ENCCPUC72 | 4" Backsplash UC72R / F / D | 693      |



# ACCESORIES & PARTS

## COMPRESSORS

| CODE   | DESCRIPTION                            | MODELS   | PRICE \$ |
|--------|--|--|----------|
| 301D12 | Compressor, 3/8 R134a 115V/60Hz        | AN23CR, AGB23CR, UC72R, UC72P, UC72PMT, MR67, MR67EN, IMC58SS, IMC58DS, VC1400, VC2010, VC5054, VC5079   | 786      |
| 301D16 | Compressor, 1/3 R134a 115V/60Hz        | AN23, AN49MX, AGB23, AGB23-2, MR41, MR41EN, MPG1980, IMC49SS, IMC49DS  | 799      |
| 301D17 | Compressor, 1/4 R134a 115V/60Hz        | UC48R, UC48P, UC48PMT, UC60R, UC60P, UC60PMT, MPG1490, MSG52, MSG72, MSG96, IMC34SS, IMC34DS, ERV84IISD, ERV84IIGD, VSU63L, VSU63R, VSU77L, VSU77R | 759      |
| 301D18 | Compressor, 1-1/4 R404A 208V-230V/60Hz | VAR12H, VAR18H   | 1,013    |
| 301D19 | Compressor, 1/5 R134a 115V/60Hz        | UC27R, UC27P, UC27PMT, MSG48, ERV36IISD, ERV36IIGD, ERV60IISD, ERV60IIGD   | 733      |
| 301D20 | Compressor, 1/2 R134a 115V/60Hz        | AN49, AGB49, AGB49-4, MR93, MR93EN   | 808      |
| 301D22 | Compressor, 1/8 R134a 115V/60Hz        | VSU50L, VSU50R, All VIP Models   | 359      |
| 301D25 | Compressor, 1/2 R404A 220V/60Hz        | VAR15H   | 953      |
| 301D32 | Compressor, 1-1/4 R404A 115V/60Hz      | AN49BT, AGB49BT, ABT71L  | 907      |
| 301D36 | Compressor, 3/8 R404A 115V/60Hz        | UC48F, MR41BT  | 847      |
| 301D39 | Compressor, 5/8 R134a 115V/60Hz        | AN49CR, AN67, AN67CR, AGB49CR  | 842      |
| 301D40 | Compressor, 1/2 R404A 115V/60Hz        | ABT31S, UC60F  | 823      |
| 301D41 | Compressor, 5/8 R404A 115V/60Hz        | AN23BT, AN49MX, AGB23BT, MR67BT  | 901      |
| 301D42 | Compressor, 3/4 R404A 208V-230V/60Hz   | AN67CR, AGN49BT, VAR15H, VAR18H  | 951      |



ETL LISTED TO UL471 standard and sanitation classified to NSF / We reserve the right to change specifications without prior notice

## ACCESSORIES & PARTS

|           |                                   |   |       |
|-----------|-----------------------------------|---|-------|
| 301D43    | Compressor, 3/4 R404A 115V/60Hz   | ABT51L  | 855   |
| 301D45    | Compressor, 1 R404A 115V/60Hz     | AGB23BTCR   | 996   |
| 301D48sp2 | Compressor, 1/4 R404A 115V/60Hz   | UC27F   | 342   |
| 301D49    | Compressor, 3/4 R134a 115V/60Hz   | MR119EN   | 832   |
| 301D66    | Compressor, 1/2 R404A 115V/60Hz   | VBR9R, VBR9SS, VBR9FG, VAR12R, VARAA90R, VEU12R, VEUAA90R   | 372   |
| 301D67    | Compressor, 3/4 R404A 115V/60Hz   | VBR12R, VBR12SS, VBR12FG, VAR15R, VARAC90R, VEU15R, VEUC90R | 839   |
| 301D68    | Compressor, 1 R404A 115V/60Hz     | VBR18R, VBR18SS, VBR18FG, EML9CM1, EML9INOXM1               | 849   |
| 301D75    | Compressor, 1 R404A 220V/60Hz     | EML12CM1, EML12INOXM1                                       | 880   |
| 301D77    | Compressor, 1-1/4 R404A 220V/60Hz | EML18CM1, EML18INOXM1                                       | 1,014 |
| 301D80    | Compressor, 1 R404A 115V/60Hz     | VAR18R, VEU18R  | 740   |
| 301T04    | Compressor, 2 R404A 220V/60Hz     | ABT101L   | 1,481 |
| 301T05    | Compressor, 2-1/2 R404A 220V/60Hz | ABT141L   | 1,485 |

### DIGITAL CONTROL

| CODE      | DESCRIPTION                                 | MODELS   | PRICE \$ |
|-----------|---|--|----------|
| 308X05SP2 | Electronic Controller, 3 Relays             | All Reach-ins, All MR models, All EVV models and MR67Retro, All ERV models | 326      |
| 308X84    | EVCO Digital Controller, ABT                | All ABT Models   | 610      |
| 308UL05   | Electronic Controller, XR30CX, 115V/50-60Hz | All VSU Models, All VIP Models, All EML Models                             | 326      |
| 308UL06   | Electronic Controller, 115V/50-60Hz         | All MSG Models, All IMC Models   | 326      |
| 308UL08   | Electronic Controller, 2 Relays             | All VC Models  | 326      |
| 308UL09   | Electronic Controller, XW271L               | All VBR Models, All VAR Models   | 326      |



CODE: 308X05SP2

# NOMENCLATURE

| CODE      | DESCRIPTION                             | CODE     | DESCRIPTION                               | CODE         | DESCRIPTION                            |
|-----------|---|----------|---|--------------|--|
| IRR       | Infrico Refrigerated Reach-in           | VAR      | Display Case                              | ERV_IIGD     | Back Bar, Stainless Steel, Glass Door  |
| AN        | Bottom Mounted Reach-in                 | VBC      | Display Case Supermarket                  | IMC_SS       | Milk Cooler_Single Side                |
| AGN       | Slimline Reach-in                       | ICT      | Infrico Counter Top                       | IMC_DS       | Milk Cooler_Dual Side                  |
| AGB       | Top Mounted Reach-in                    | IAG      | Infrico Air Curtain Grab-N-Go Cases       | VIP_GLASSTOP | Ingredients Display with Glass         |
| RI        | Roll-in                                 | EML      | Air Curtains                              | VIP_SOLIDLID | Ingredients Display with Lid           |
| RT        | Roll-Thru                               | BT       | Freezers                                  | VSU_L        | Sushi Case_Left Side Condensing Unit   |
| RIBT      | Roll-in Freezer                         | MX       | Dual Temp                                 | VSU_R        | Sushi Case_Right Side Condensing Unit  |
| IBC       | Infrico Blast Chillers & Shock Freezers | CR       | Glass                                     | VBR_R        | Refrigerated Curved Glass Display      |
| ABT       | Blast Chillers & Shock Freezers         | BT CR    | Freezers & Glass                          | VBR_SS       | Refrigerated Self Service Display      |
| IUC       | Infrico Undercounters                   | 1S       | Small Side Pan                            | VBR_FG       | Refrigerated Display Cases, Flat Glass |
| UC        | Undercounters                           | 1L       | Large Side Pan                            | VAR_H        | Gelato Case                            |
| IRT       | Infrico Refrigerated Tables             | 1P       | Roll-Thru                                 | VBC_R        | Supermarket Display Cases              |
| MR        | Refrigerated Tables                     | 1C       | Roll-in                                   | INOX         | Stainless Steel                        |
| MPG       | Granite Top Pizza Prep Tables           | UC_R     | Refrigerator Undercounters                | M1           | Temperature between 33°F/41°F          |
| MSG       | Chef Bases                              | UC_D     | Undercounter with Drawers                 | CM1          | Decoration Black Standard              |
| IMD       | Infrico Merchandiser                    | UC_F     | Freezer Undercounters                     |              |  |
| ERV       | Back Bar                                | UC_P     | Sandwich / Salad Prep Tables              |              |  |
| IMC       | Infrico Milk Cooler                     | UC_P_D   | Sandwich / Salad Prep Tables with Drawers |              |  |
| EVV       | Wine Cooler                             | UC_PMT   | Megatop Prep Tables                       |              |  |
| EVV_RETRO | Retro Refrigerators / Confectionery     | MR_BT    | Freezer Tables                            |              |  |
| IDC       | Infrico Display Cases                   | MR_EN    | Pizza Prep Tables                         |              |  |
| VC        | Display Case. Deli                      | II       | Stainless Steel                           |              |  |
| VBR       | Display Case. Bakery Curved Glass       | ERV_IISD | Back Bar, Stainless Steel, Solid Door     |              |  |

ETL LISTED TO UL471 standard and sanitation classified to NSF / We reserve the right to change specifications without prior notice

---

## COMMERCIAL TERMS & CONDITIONS

---

### Terms:

Standard payment terms a net 30 days. All orders are subject to credit approval. All Invoices not paid within the specified terms will be subject to a 1.5% per month delinquency charge. Buyer agrees to pay all costs of collection including such attorney's fees as may be allowed by law.

### Acceptance:

All orders are subject to acceptance by Infrico USA Corp.

### Prices:

All prices are FOB Miami, Florida. Prices and specifications are subject to change without notice.

### Taxes:

This price list does not include any Federal, State, City or Local taxes, which may apply and are subject thereto.

### Shipment:

Requested carrier will be used upon request. Infrico USA Corp. has the right to ship via any responsible carrier if requested carrier is unavailable. Shipping

charges are payable by consignee and any claims arising as such charges shall be resolved between the carrier and the consignee.

### Damaged merchandise:

The consignee must make all freight claims for damages in transit with the carrier. Infrico USA Corp. assumes no responsibility for damages while in transit.

### Delivery:

Shipping or delivery dates are approximates. Infrico USA Corp. is not responsible for any delays in deliveries that are beyond our control, such as fires, weather, and delays in transportation, strikes, or any contingencies of similar characters.

### Cancellations & Returns:

Cancelled orders and returned merchandise are subject to a 25% restocking and handling charge. Written authorization is required for a return of any equipment. All equipment returned must be in its original factory crate; freight prepaid and must be in the same condition as originally shipped by Infrico USA Corp.



# INFRICO USA LIMITED WARRANTY

INFRICO USA (further on stated as "INFRICO") warrants to the original purchaser of every new INFRICO refrigerated unit, the cabinet and all parts thereof, to be free from defects in material or workmanship, under normal and proper use and maintenance service as specific by INFRICO and upon proper installation and start-up in accordance with the instruction packet supplied with each INFRICO unit. INFRICO's obligation under this warranty is limited to the following conditions upon each date of invoice:

|           |               |
|-----------|---------------|
| Parts     | Two (2) years |
| Labor     | Two (2) years |
| Compresso | Six (6) years |

All parts covered under this specific above stated warranty that are determined as failures by INFRICO, are limited to the repair or replacement, including labor charges of defective parts or assemblies.

## WARRANTY CLAIM PROCEDURE

All claims for labor or parts must be made directly through INFRICO. All claims should include model number of the unit, the serial number of the cabinet, proof of purchase, date of installation, and all pertinent information supporting the existence of the alleged defect.

Based on the reported case, INFRICO will program the service attention either by sending an authorized technician to the place indicated by the Customer in order to solve the situation or will send the necessary spare parts for its repair.

This contract does not apply outside the limits of the USA and CANADA. Nor does it apply to any part which has been subject to misuse, neglect, alteration, accident or to any damage caused by transportation, flood, fire, or the acts of god. This contract is not effective unless the INFRICO Warranty Claim Card, furnished to the distributor, is properly filled out and mailed to [HYPERLINK "mailto:service@infrico.com" service@infrico.com](mailto:service@infrico.com) within 24 HOURS from the date of delivery. The term "Original Purchaser" as used herein shall be deemed to refer to that person, firm, association, or company for whom the refrigeration unit refers to herein is originally installed.

## WHAT IS NOT COVERED BY THIS WARRANTY

INFRICO's sole obligation under this warranty is limited to either repair or replacement of parts, subject to the additional limitations below. This warranty neither assumes nor authorizes any person to assume obligations other than those expressly covered by this warranty.

No consequential damages: INFRICO is not responsible for economic loss; profit loss or special indirect or consequential damages, including without limitation, losses or damages arising from food or product spoilage claims whether or not on account of refrigeration failure.

Warranty is not transferable: This warranty is not assignable and applies only in favor of the original purchaser/user to whom delivered. Any such assignment or transfer shall void the warranties herein made and shall void all warranties, express or implied, including any warranty of merchantability or fitness for a particular purpose.

Improper use: INFRICO assumes no liability for parts or labor coverage for component failure or other damages resulting from improper usage or installation or failure to clean and/or maintain product as set forth in the warranty packet provided with the unit.

Alteration, neglect, abuse, misuse, accident, damage during transit or installation, fire, flood, acts of God: INFRICO is not responsible for the repair or replacement of any parts that INFRICO determines have been subjected after the date of manufacture to alteration, neglect, abuse, misuse, accident, damage during transit or installation, fire, flood, act of God or improper electrical connections. INFRICO is not responsible for the repair or replacement of failed or damaged components resulting from electrical power failure, the use of extension cords, low voltage, or voltage drops to the unit.

No implied warranty of merchantability or fitness for a particular purpose: There aren't any other warranties expressed, implied or statutory, except the warranties as described above. These warranties are exclusive and in lieu of all other warranties, including implied warranty and merchantability or fitness for a particular purpose. There are no warranties which extend beyond the description on the face hereof.

Outside USA & CANADA: This warranty does not apply to, and INFRICO is not responsible for, any warranty claims made on products sold or used outside the United States of America and Canada.

ETL LISTED TO UL471 standard and sanitation classified to NSF / We reserve the right to change specifications without prior notice

---


**SERVICE - WE ARE CLOSER TO YOU**

---



FOR GENUINE FACTORY PARTS  
& AUTHORIZED SERVICE

**1-855-340-4637**

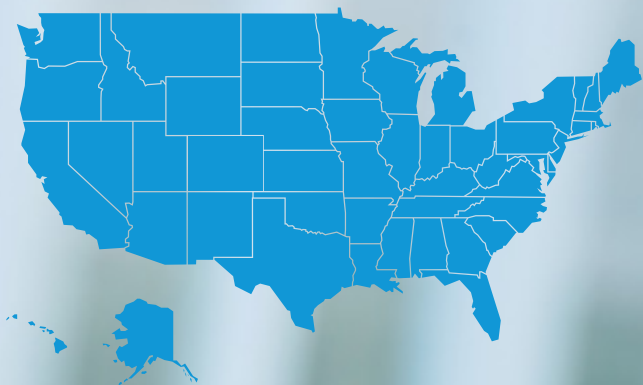

[service@infrico.com](mailto:service@infrico.com)

[www.infrico.us](http://www.infrico.us)

The technical service is focused on advising, care,  
repair and delivery of spare parts to customer service



# SERVICE VIDEOS



---

**SERVICE VIDEOS**

---



# QUICK REFERENCE PRICING GUIDE

ETL LISTED TO UL471 standard and sanitation classified to NSF / We reserve the right to change specifications without prior notice

| MODEL          | LIST PRICE | PAGE |
|----------------|------------|------|
| IRR-AN23       | \$5,300    | 12   |
| IRR-AN49       | \$7,100    | 12   |
| IRR-AN67       | \$9,200    | 12   |
| IRR-AN23BT     | \$6,800    | 14   |
| IRR-AN49BT     | \$8,900    | 14   |
| IRR-AN67BT     | \$11,850   | 14   |
| IRR-AN49MX     | \$10,750   | 14   |
| IRR-AN23CR     | \$5,870    | 16   |
| IRR-AN49CR     | \$9,100    | 16   |
| IRR-AN67CR     | \$11,900   | 16   |
| IRR-AGB23      | \$7,000    | 18   |
| IRR-AGB49      | \$10,300   | 18   |
| IRR-AGB23-2    | \$7,100    | 18   |
| IRR-AGB49-4    | \$10,500   | 18   |
| IRR-AGB23BT    | \$8,500    | 20   |
| IRR-AGB49BT    | \$11,800   | 20   |
| IRR-AGB23CR    | \$7,400    | 22   |
| IRR-AGB49CR    | \$10,700   | 22   |
| IRR-AGB23CR-2  | \$7,500    | 22   |
| IRR-AGN49CR-4  | \$10,800   | 22   |
| IRR-AGB45RI    | \$13,900   | 24   |
| IRR-AGB96RI    | \$15,900   | 24   |
| IRR-AGB45RT    | \$15,400   | 24   |
| IRR-AGB45RI BT | \$19,100   | 24   |
| IRR-AGB96RI BT | \$22,100   | 24   |
| IBC-ABT3 1S    | \$11,500   | 32   |
| IBC-ABT5 1L    | \$15,200   | 32   |
| IBC-ABT7 1L    | \$17,300   | 32   |
| IBC-ABT7 1M    | \$17,900   | 32   |
| IBC-ABT10 1L   | \$22,800   | 34   |
| IBC-ABT14 1L   | \$32,500   | 34   |
| IBC-ABT201S    | \$48,000   | 36   |
| IBC-ABT20 1P   | \$51,000   | 36   |

| MODEL        | LIST PRICE | PAGE |
|--------------|------------|------|
| IBC-ABT20 1C | \$47,000   | 36   |
| IUC-UC27R    | \$3,900    | 40   |
| IUC-UC48R    | \$4,900    | 40   |
| IUC-UC60R    | \$5,200    | 40   |
| IUC-UC72R    | \$6,000    | 40   |
| IUC-UC27F    | \$4,700    | 42   |
| IUC-UC48F    | \$6,000    | 42   |
| IUC-UC60F    | \$6,800    | 42   |
| IUC-MR41     | \$5,000    | 44   |
| IUC-MR67     | \$6,200    | 44   |
| IUC-MR93     | \$7,300    | 44   |
| IUC-MR41BT   | \$7,200    | 46   |
| IUC-MR67BT   | \$8,200    | 46   |
| IRT-UC27P    | \$4,200    | 50   |
| IRT-UC48P    | \$5,500    | 50   |
| IRT-UC60P    | \$6,100    | 50   |
| IRT-UC72P    | \$7,000    | 50   |
| IRT-UC27PMT  | \$4,700    | 52   |
| IRT-UC48PMT  | \$6,200    | 52   |
| IRT-UC60PMT  | \$6,800    | 52   |
| IRT-UC72PMT  | \$7,800    | 52   |
| IRT-MR41EN   | \$6,400    | 54   |
| IRT-MR67EN   | \$7,800    | 54   |
| IRT-MR93EN   | \$9,200    | 54   |
| IRT-MR119EN  | \$15,400   | 54   |
| IRT-MPG1490  | \$10,200   | 56   |
| IRT-MPG1980  | \$12,500   | 56   |
| IUC-MSG36    | \$7,000    | 60   |
| IUC-MSG48    | \$8,000    | 60   |
| IUC-MSG52    | \$8,500    | 60   |
| IUC-MSG72    | \$10,400   | 60   |
| IUC-MSG96    | \$12,400   | 60   |
| IUC-MSG110   | \$14,500   | 60   |

| MODEL             | LIST PRICE | PAGE |
|-------------------|------------|------|
| IMD-ERV36IISD     | \$4,200    | 64   |
| IMD-ERV60IISD     | \$5,000    | 64   |
| IMD-ERV84IISD     | \$6,000    | 64   |
| IMD-ERV36IIGD     | \$4,600    | 66   |
| IMD-ERV60IIGD     | \$5,900    | 66   |
| IMD-ERV84IIGD     | \$7,000    | 66   |
| IMD-IMC34SS       | \$4,400    | 68   |
| IMD-IMC49SS       | \$5,300    | 68   |
| IMD-IMC58SS       | \$5,600    | 68   |
| IMD-IMC34DS       | \$6,000    | 70   |
| IMD-IMC49DS       | \$7,000    | 70   |
| IMD-IMC58DS       | \$7,550    | 70   |
| IMD-EVV100        | \$7,700    | 72   |
| IMD-EVV200MX      | \$14,900   | 72   |
| IMD-EVV23RETRO    | \$12,800   | 74   |
| IMD-EVV49RETRO    | \$18,500   | 74   |
| IMD-EVV494SDRETRO | \$16,400   | 74   |
| IDC-VBR9R         | \$11,800   | 78   |
| IDC-VBR12R        | \$13,500   | 78   |
| IDC-VBR18R        | \$17,000   | 78   |
| IDC-VBR9SS        | \$11,800   | 80   |
| IDC-VBR12SS       | \$13,500   | 80   |
| IDC-VBR18SS       | \$17,000   | 80   |
| IDC-VBR9FG        | \$11,800   | 82   |
| IDC-VBR12FG       | \$13,500   | 82   |
| IDC-VBR18FG       | \$17,000   | 82   |
| IDC-VAR12H        | \$26,000   | 84   |
| IDC-VAR15H        | \$30,000   | 84   |
| IDC-VAR18H        | \$33,000   | 84   |
| IDC-VAR12H FG     | \$26,000   | 86   |
| IDC-VAR15H FG     | \$30,000   | 86   |
| IDC-VAR18H FG     | \$33,000   | 86   |
| IDC-VBZ12H        | \$9,300    | 88   |

| MODEL                   | LIST PRICE | PAGE |
|-------------------------|------------|------|
| IDC-VBZ15H              | \$10,000   | 88   |
| ICT-VSU50R              | \$3,770    | 92   |
| ICT-VSU63R              | \$4,250    | 92   |
| ICT-VSU77R              | \$4,650    | 92   |
| ICT-VSU50L              | \$3,770    | 94   |
| ICT-VSU63L              | \$4,250    | 94   |
| ICT-VSU77L              | \$4,650    | 94   |
| ICT-VIP1330B1/3GLASSTOP | \$4,600    | 96   |
| ICT-VIP1490B1/3GLASSTOP | \$4,850    | 96   |
| ICT-VIP1740B1/3GLASSTOP | \$5,100    | 96   |
| ICT-VIP1980B1/3GLASSTOP | \$5,600    | 96   |
| ICT-VIP1330B1/3SOLIDLID | \$3,600    | 98   |
| ICT-VIP1490B1/3SOLIDLID | \$3,850    | 98   |
| ICT-VIP1740B1/3SOLIDLID | \$4,100    | 98   |
| ICT-VIP1980B1/3SOLIDLID | \$4,500    | 98   |
| IAG-EML9CM1             | \$11,300   | 102  |
| IAG-EML12CM1            | \$13,500   | 102  |
| IAG-EML18CM1            | \$16,000   | 102  |
| IAG-EML9INOXM1          | \$12,700   | 104  |
| IAG-EML12INOXM1         | \$14,800   | 104  |
| IAG-EML18INOXM1         | \$18,000   | 104  |

DOWNLOAD


 Infrico




WWW.INFRICO.COM



SPEC SHEET

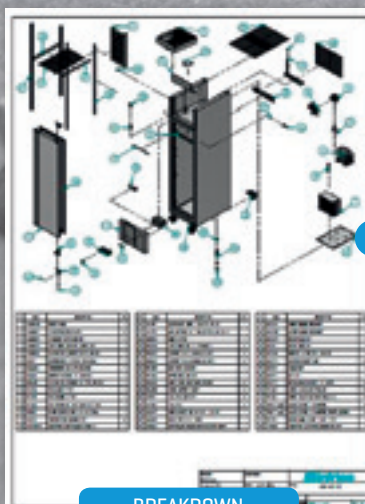

BREAKDOWN

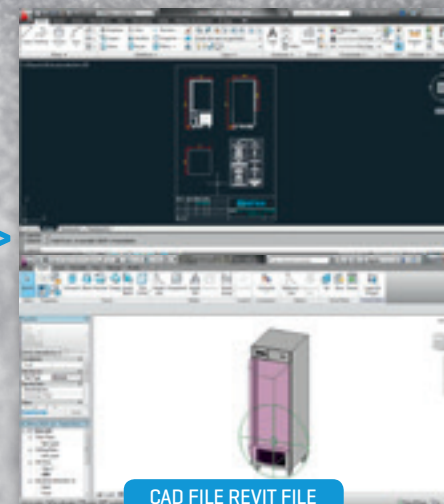

CAD FILE REVIT FILE

# SHOWS



Singapore [SGP]



Dubai [EAU]



Barcelona [Spain]



Lyon [France]



Anaheim [USA]



Rimini [Italy]



Milán [Italy]




Chicago [USA]

ETL LISTED TO UL471 standard and sanitation classified to NSF / We reserve the right to change specifications without prior notice



NAFEM Anaheim OC 2015

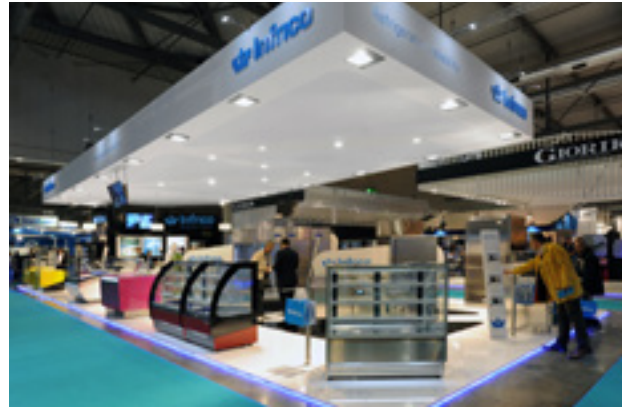

Host Milán 2015



Gulfood Dubai 2013



NRA Chicago 2013



Sección gastronomic shows. Barcelona 2014.



Hostelco Barcelona 2012



Hostelco Barcelona 2014







AUGMENTED  
REALITY

---

1.



Download  
the App  
**ClickKar**

---

2.




Scan  
the cover

---

3.



Interact,  
enjoy!

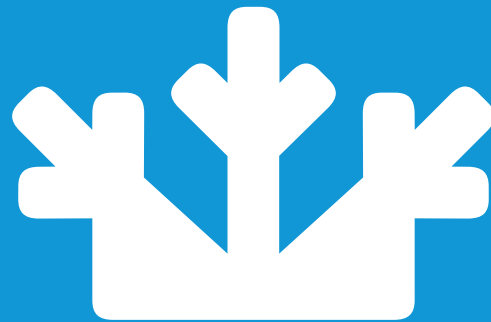


Refrigeration reliability



# Infrico

Refrigeration reliability

— USA —

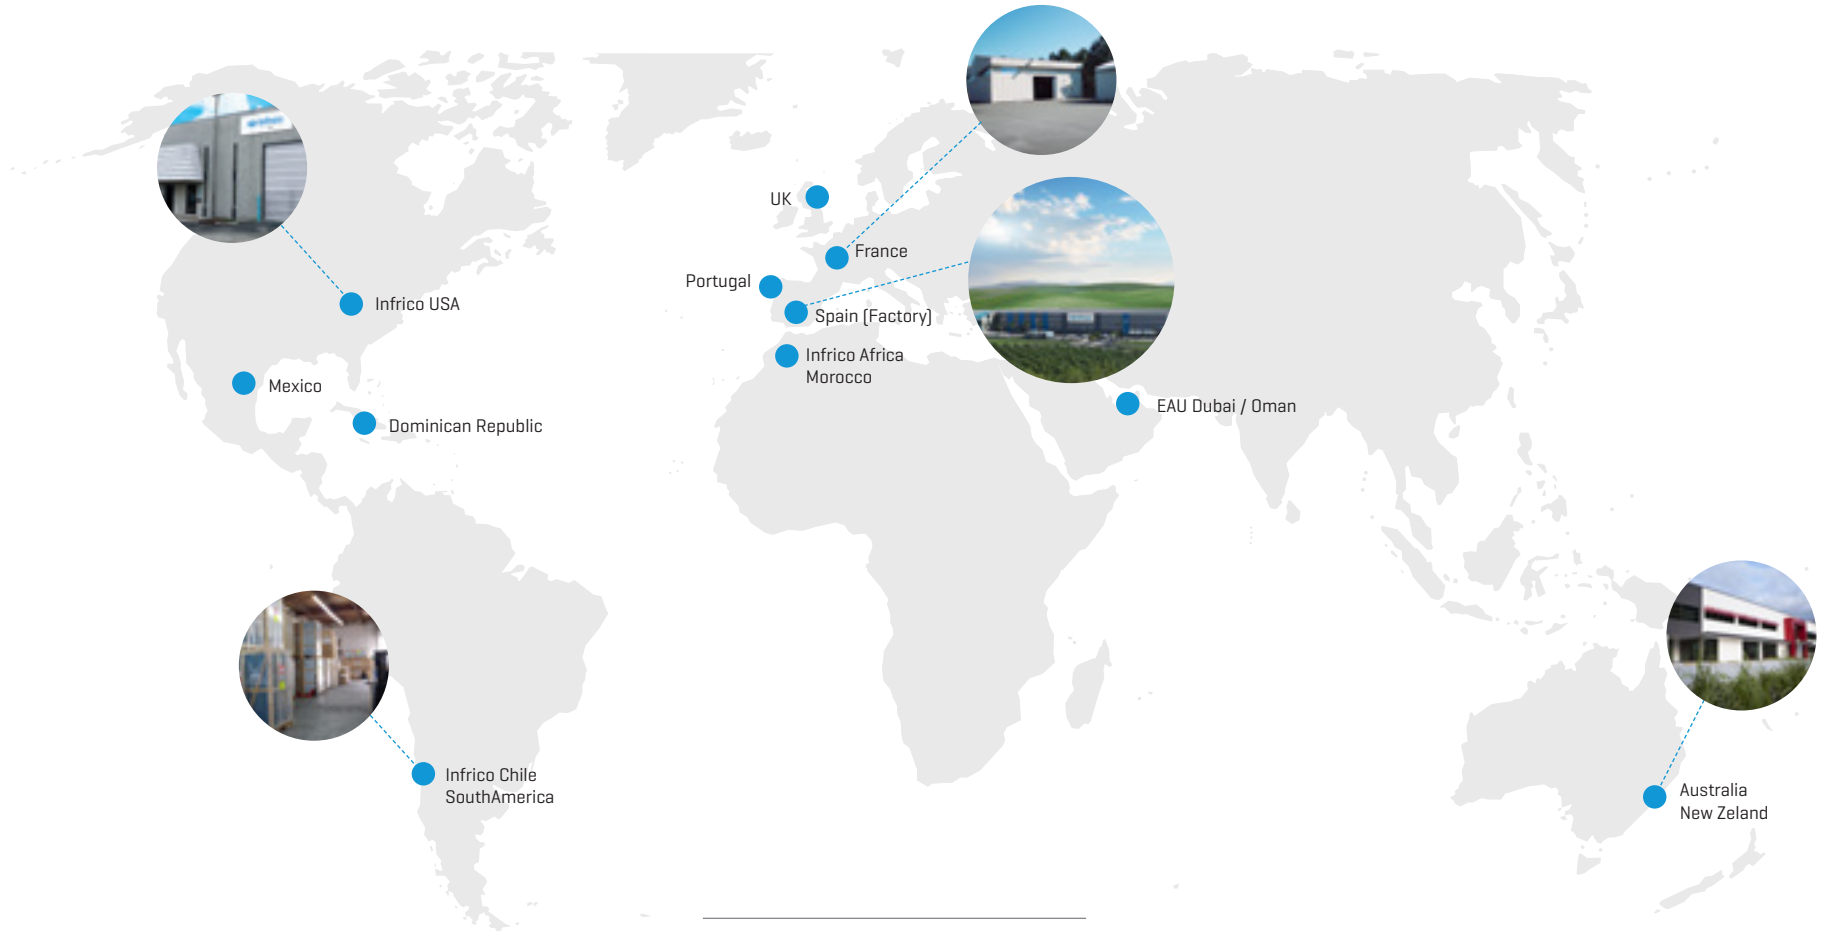

**1,000,000** sq Ft Factory  
**10** subsidiary companies  
 Sales in **80** countries around the world



Infrico USA, Corp. · 7042 NW 46 th street · Miami, Florida 33166 · 1.305.777.9599 office · 1.305.777.9598 fax · USA  
 sales @infrico.com · service@infrico.com